


1920 Stewart Ave., S. W., Atlanta 15, Ga. Phone PO 6-3666




# ARCTIC CIRCLE

"THE ORIGINAL"

### MOBILE HOME COOLER


#### MOBILE HOME COOLER



#### **Mobile Home Coolers**

Cools average mobile home or one room. Large 14" fan. 1/20 H.P. motor. Cabinet: 28" x 28" x 26" high. 115 Volt. Complete with grille kit and pump. Wt. 61 lbs.

AC-1 (GD-2114DP-2) two speed. 1800/1200 CFM



#### **Room Cooler**

Fan Type. Volume cooling at lowest cost. Large 16-inch fan delivers Cooled air for one room. 1400 CFM. Equipped with electric cord, switch, window filler panels. Easily installed in doublehung window. Cabinet: 23" W. x 18" D. x 23½" HAC-5 (F-2000) single speed Wt. 41 lbs.

AC-6 (D-2016P-2) two speed with pump Wt. 51 lbs.

#### **Microglas Replacement Filters**

Packaged for easy installation. Each Microglas replacement pack contains ready cut filter and individually wrapped aspen pad to fit your cooler model. Packages include number of filters required for each cooler.

AC-20 (2 pads size 17 x 19 and 1 pad size 22 x 19) for AC-10, AC-11

AC-21 (4 pads size 22 x 19) for AC-1, AC-2, AC-3


AC-22 (4 pads size 22 x 28)

for AC-4



CONTROLLED COOLING
EASY TO INSTALL
NO POWER DRAIN
REMOVES COOKING ODORS
SIMPLE TO OPERATE
FILTERS AS IT COOLS



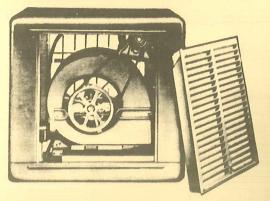


#### **Blower Type**

Cools two to three room mobile home. Powerful blower. 1/4 H.P. motor. Cabinet 28" x 28" x 26" high. 115 Volt. Complete with grille kit and pump Wt. 128 [bs.]

AC-2 (GB-2211DP) single speed: 2200 CFM

AC-3 (GB-2211DP-2) two speed, 2200/1460 CFM



#### **Window Coolers**

These coolers are designed for casement or double-hung window installation. Available with single and two speed motor. Exclusive four-way adjustable plastic grilles. New fiberglas backed filters assure maximum cooling and filtering efficiency. Available in models from 2000 to 5000 CFM. Cabinet: 28" W. x 231/4" D. x 26" H.; grille size 233/4" W. x 121/2" H.

AC-10 (SR-2010-2) two speed Wt. 101 lbs. AC-11 (SR-2010P-2) two speed, pump

Wt. 104 lbs.



#### **Blower Type**

For largest-size mobile home, or up to four rooms in home. Big 121/8" blower. 1/3 H.P. motor. Cabinet: 28" x 28" x 341/4" high. 115 Volt. Complete with grille kit and pump

AC-4 (GB-3312DP-2) two speed 3100/2060 CFM

Wt. 139 lbs.



## RECIRCULATING PUMP KITS

Permits re-use of water in areas where supply or disposal problem exists. Float valve assembly automatically shuts off flow of water to reservoir when correct level is reached. Easily installed.

AC-7 (P26-K) Pump kit for AC-1, AC-2, AC-3, AC-6 Wt. 3 lbs.

AC-8 (P36-K) Pump kit for AC-4 Wt. 6 lbs.



#### WATER CONNECTOR KIT

Simplifies connection to outside water supply. Consists of hose faucet adapter, adapter valve, 25 ft. of 5/16" copper tubing. Fits on standard faucet. Easy to install.

AC-9 (TIK) Water Connector kit Wt. 4 lbs.

Leslie's

Paglia's Contrale	g Number Eleven	
1 68446 8 Caraic		Page
Page	Page	
Α	Fittings, gas & water 17, 34, 39, 40, 41, 42,	Park assys. & conn
A	43, 44, 45, 46, 48, 49	Pipe insulations 52
Air conditioners 1, 53	Freezers 33	Plumbing supplies27, 28, 42, 43, 44,
Almond sticks 25	Furniture 24, 25	45, 46, 47, 48, 49, 52
Antennas. IV		
Assist bars 20 Awnings, aluminum & canvas 22, 23	G	R
Awnings, aluminum & canvas	Gas light fixtures	Refrigerators, electric & butane
Awning accessories 22, 23	Gas tanks & stands 41	Regulators40
Awning rail	Grease caps8	Resistors9
Axle assemblies		Roof coating50, 51
В	Н	S
Balls	Hardware	
Ball covers 7	Heater accessories & parts26, 27, 28, 34,	Screen door grilles
Bath tubs 45, 46	35, 36, 37, 39, 40, 41	Sealing compounds
Blinds, venetian 25	Heaters, water 47, 52	Sewer connections 42, 43, 45
Brake controls 8, 9	Heaters 34, 35, 38	Shower cabinets & accessories
Brakes, electric 9	Helper springs 3, 4, 5	Sinks & fittings
Brakes, hydraulic		Springs, helper
Breakaways 8, 9	Hitches2, 3, 5, 6, 7	Stabilizing jacks
biodiana ja	Hose, water & sewer 42, 48	Steps
C	Hot plates 38	Stoves & accessories 26, 27, 28, 32, 33, 34,
Canvas 23	Hub caps 8	35, 36, 37, 38, 39, 40, 41
Caulking & sealing & paint16, 23, 50, 51		
Chairs 24		
City water intakes 49	Ironing board25	T. yz
Connectors electrical 9, 10, 11,		Tables 24
12, 13, 14, 15		Tanks, gas & oil
12, 13, 14, 15 Cook stoves 38	Jacks3, 5, 6, 7	Tank holders
Cook stove accessories 26, 27, 38,	Jack base & wheel chock 6	Tape, electric
39, 40, 41		Tape, masking, electric, friction
Coolers 1, 53	L	Television antennas
Copper tubing	Lavatories 45, 46	Toilets 43, 44, 45
Cord extension & electric 9, 10, 11, 12, 15	Light fixtures, electric 17, 20	Tools, Flaring & cutting 41
Couplers	Light fixtures, gas	Traps 42, 43, 45, 46, 48
	Lights, clearance & directional,	Tubs & fittings
D	stop & tail	
Directional signals 12	Locks, door & trunk 19, 20, 21	V
Door chimes25	Louvers	Venetian blinds & accessories
Drapery rods		Ventilators & mechanisms26, 27, 28, 29
Drier25	M	Voltage reducers
F	Medicine cabinets	
	Mirrors, extension	W
Electric connectors	Moulding	Washing machine25
13, 14, 15		Water coolers
Electric cords & cable	0	Water heaters
Electric fixtures 14, 17, 20	Oil filters 35	Water heater accessories 47, 52
Electric park connectors	Oil tanks, stands & gauge35, 37	Water hose
Extension mirrors5	Overload springs	Water pump 48
		Wheels & accessories 8
Fans26, 27, 28, 29, 53	P	Windows & accessories
Fans 26, 27, 28, 29, 53 Faucets 46, 49	Paints & caulking 23, 50, 51	Wire
Faucets	Taill's & Cauking26, 30, 31	

#### Take advantage of the enclosed SELF-ADDRESSED ENVELOPE when sending in your order.

#### MINIMUM ORDER-\$1.00.

#### SPECIAL INSTRUCTIONS

CLAIMS—All claims on materials lost or damaged in transit shall be made by consignee, except PARCEL POST claims which shall be made through our office.

TERMS-NET CASH with order, or if C. O. D. is requested, a 25% deposit must accompany order. Please do not ask us to make C. O. D. shipments without a deposit.

On parcel post shipments be sure to include sufficient postage and the insurance fee. We have no facilities for handling open accounts and where there is a small difference it necessitates our shipping C. O. D. for the balance even if it amounts to 15c. PLEASE AVOID THIS ADDITIONAL EXPENSE TO YOU BY SENDING SUFFICIENT POSTAGE. If you send too much, the balance will immediately be re-

turned to you. C. O. D. fees are costly and you can avoid these by sending enough money.


Please be sure that your order shows a description of the article as well as our stock number to avoid any errors.

Shipment can be made by express, freight, motor truck, air mail, air express or parcel post. Be sure to designate how you prefer shipment, otherwise our shipping department will us their best judgment.

RETURN OF MERCHANDISE—No returns accepted without authorization from our office. 10 per cent handling charge on all returns. Merchandise out of stock over 30 days will not be accepted for credit.

#### ALL PRICES ARE F.O.B. ATLANTA. ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE

		PARCE	L POST RATES	FROM	ATLANTA	4			
Zone	Limit of Zone	1 st Lb.	Each Add'l Lb.		A	moun	1	Insured Fee	C.O.D. Fee
1st and 2nd	thru 149 miles	.23	.04	From	\$ 0.01	to	\$ 5.00	.10	.30
3rd	150-299 miles	.23	.05	From	5.0	to	10.00	.10	.40
4th	300-599 miles	.24	.07	From	10.01	to	25.00	.20	.60
5th	600-999 miles	.26	.10	From	25.0	to.	50.00	.20	.70
6th	1000-1399 miles	.28	.12	From	50.0	to	100.00	.30	.80
7th	1400-1799 miles	.30	.16	From	100.0	to	150.00	.40	.90
8th	1800 miles and over	.32	.18	From	150.0	l to	200.00	.40	1.00
	—40 lbs. local, 1st and —72" for length and g			thru 8t	h zones				

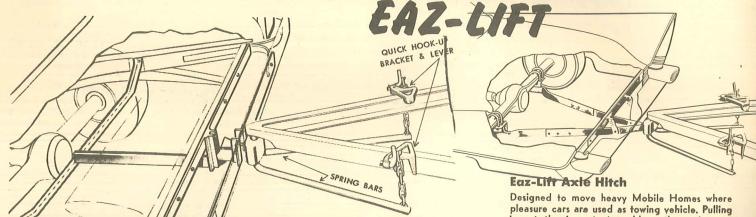

Regular and Jumbo Hitches

CONNECTS and DISCONNECTS with car at any angle, even when trailer is parked on uneven ground. Clamps to any trailer tongue; tension of springs positively secures quick hookup bracket to tongue. Tapered spring action gives 5 inches. NO SWAY—NO SUCTION. Double springs work against each other at off-center angles.

#### Regular Eaz-Lift

EL-1	Complete (D)	Wt. 75 lbs.	EL-8	Complete (D)	Wt. 90 lbs.
EL-2	Trailer attach. (B)	Wt. 40 lbs.	EL-9	Trailer attach. (D)	Wt. 50 lbs.
EL-3	Sleeve—right	Wt. 3 lbs.	EL-11	Sleeve-right	Wt. 3 lbs.
EL-4	Sleeve-left	Wt. 3 lbs.	EL-12	Sleeve-left	Wt. 3 lbs.
EL-5	Complete (D), Chrome	Wt. 76 lbs.	EL-14	Spring and chain, right	Wt. 17 lbs.
EL-10	Eaz-Lift Chrome Cover	Wt. 2 lbs.	EL-15	Spring and chain, left	Wt. 17 lbs.
EL-26	Spring and chain, right	Wt. 15 lbs.	EL-16	Quick hook-up, right	Wt. 8 lbs.
EL-27	Spring and chain, left	Wt. 15 lbs.	EL-17	Quick hook-up, left	Wt. 8 lbs.
EL-28	Quick hook-up, right	Wt. 6 lbs.			
EL-29	Quick hook-up, left	Wt. 6 lbs.			

## MARNER mobilehome HITCH

Install with a Crescent Wrench No Overload Springs Automotive Engineered

Jumbo Eaz-Lift

WW-1

WW-1 Warner Axle Hitch

Wt. 210 lbs.

Engineered for your relief from driving strain. Constructed ruggedly for your safety! Designed for your easy installation! Manufactured for your long range economy! Guaranteed for your protection!



is not the important problem, the main consideration is to enable car to carry heavy hitch load. Springs are made of high tensile steel; aperates as other Eaz-Lifts. Axle hitch extends mobile home tongue 5 ft. longer by using distance between rear axle and bumper as additional leverage, which reduces actual hitch load.
Bolts on car SIMPLY, EASILY and QUICKLY— NO WELDING. Fits all mobile homes and cars.

Wt. 140 lbs.

EL-40 Eaz-Lift Axle Hitch

Tour-Aid Hitch

Adjustable extension tongue and drawbar combination actually distributes "down-weight" trailer over all four wheels of your car. Initial "down-weight" is directed over rear axle where TOUR-Aid drawbar fastens to most rigid section of car frame. Its adjustable, fulcrum-like action distributes equalizing weight to front wheels and keeps them in proper contact with the road.

T-21 Tour-Aid hitch Wt. 104 lbs.

T-22 Yoke carrier assy.

T-28 Locking pin with cotter pin.


Towbar with extension bar.

# Glide-A-Ride **Heavy-Duty Hitch**

Reduces pull on steering wheel, eliminates side thrust, avoids driver fatigue. Weight is carried directly on rear axle housing of car, permitting car and trailer to ride in a normal position. Fits all makes and models of cars. Easily and quickly installed. No welding, no helper springs.

G-10 Heavy Duty Hitch Wt. 1921bs.

Glide-A-Ride



Glide-A-Ride Junior Travel Hitch

Low price hitch with all advantages of the "heavy-duty" Glide-A-Ride. Draw bar weight up to 750 tbs. COMPLETELY BOLT-ON. Designed to ride axle instead of frame, and holds car and trailer in perfect alignment.


G-11 Junior Travel Hitch

Wt. 108 lbs.


Leslie's

## REESE Hitches, Jacks, Overload Springs

## REESE BAR-LEVEL



Available with Weld-On or Axle Tow Bar



(A, B, C-I) Bar-Level Axle Hitch R-50

(A, B, C) Bar-Level Weld-On Hitch

(D, B) Hydra-Level Hitch Support

(D, B, C-I) Hydra-Level Axle Hitch R-57

(D, B, C) Hydra-Level Weld-On Hitch

the ultimate in **ECONOMY** and **SIMPLICITY** 

. . . a real "easy-to-use" **EQUALIZING HITCH** 

Bar-Level is simple enough for anyone, even a child, to operate. Takes but a few seconds added to normal hook-up time. Has many exclusive safety, construction and operational advantages.

HYDRA-LEVEL HITCH D



#### COIL-LIFT OVERLOAD SPRINGS

500 lb. Light Lift R-47 Wt. 10 lbs.


3 Sizes

750 lb. Medium Lift

R-46 Wt. 11 lbs.

1000 lb. Heavy Lift R-45 Wt. 12 lbs.


#### LOW-BUOY STABILIZER



Sturdy Cast Aluminum

Nest Compactly

R-10 Set of 4 Wt. 13 lbs. Wt. 4 lbs. Each R-11

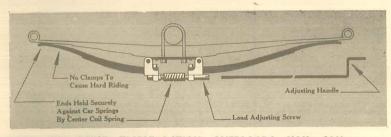

#### REESE TRIPLE-ACTION OVERLOADS YOU CAN WITH THE

Adjust your overload springs completely "on" . . . completely "off" . . . or to any desired tension

Wt. 85 lps.

W: 10 lbs.

Wt. 110 lbs.

Wr. 85 lbs.

Adjust your overload springs from behind (not under) your car.

Maintain quality of ride at maximum comfort (as before Reese Triple-Action overloads were installed) whether spring is adjusted to on, off, or intermediate tension.

R-30 Reese Triple-Action Overloads

Wt. 21 lbs.

Be sure to Specify Year and Model of car



R-40

#### REESE WAY-IT

Why guess when asked "What's the hitch weight?" You must know to properly equip the

Use WAY-IT to weigh it, and be sure. Accurate. Studily built of cast aluminum.

R-40 Reese Way-It

Wt. 5 lbs.

UNITED LEVEL RIDE AXLE HITCH — 100% BOLTED

the Lowest Priced, Highest Quality, Nickel Chrome Steel Hitch. Made with nickel chrome steel castings — not a fabricated hitch.

UNITED Axle Hitch Gives You Easy Hook-Up - No Welding.

> Lever action adjustment with two chains on trailer tongue frame

Always level ride for car and trailer

Fits all cars and trailers

United Axle Hitch Wt. 135 lbs.
United Weld-On Bar Hitch (not shown) Wt. 100 lbs.

Leslie's

THE SOUTH'S




## PNEUMATIC SPRING BOOSTERS



REAR PACKAG	ES AV	AILABLE IN STANDARD OR HI	EAVY DUTY GRAI	E							
CAR	YEAR	MODEL	REAR PKG. NO.	CAR	YEAR	MODEL	REAR PKG. NO.	CAR	YEAR	MODEL	FRONT PKG. NO.
BUICK		All models	'A-100	OPEL	'55-'58	Olympia & Rekord Kapitan (prior to Aug. '57 with	B-61 or B-23	HILLMAN	'50-'56	All models	C-9
CADILLAC	'54-'56	All models	B-64 or B-49 B-64 or B-38		00-01	sway bar behind axle) Kapitan: (Aug. '57 & after wit	**	HUDSON	'55-'57	Hornet & Wasp	C-17
	'58	All models All models (except Commercial)	B-53 A-12			sway bar ahead of axle)	B-60 or B-21	M. G.		TD, TF & A	C-9
avenue	'58	Commercial models	B-53	PACKARD	'51-'56	All models (except series 200) All series 200 with leaf springs	B-31 B-36	NASH	'53-'57	All models (except Rambler)	C-17
CHEVROLET	'53-'54	All models	B-60 or B-21 B-61 or B-23		'55-'56	All Torsion Bar Suspension models	B-50	OLDSMOBILE		All models	C-11
		All models (except Convertible) Convertible	B-63 or B-40		'57-'58	All models	B-61 or B-24	OLDSMOBILE	'54	All models	C-12
		All models	A-13	PLYMOUTH	'49-'52	All models All models	B-61 or B-23 B-60 or B-21	PACKARD	'42-'50	All models	C-12
CHRYSLER (See		All models	B-61 or B-23		'55-'56	All models	B-62 or B-25 B-62 or B-26	PLYMOUTH	'40-'54	All models	C-7
IMPERIAL!		(except Crown Imperial) Crown Imperial	B-60 or B-21 B-60 or B-22	L		All models	B-63 or B-48	PONTIAC	'39-'48	All models	C-11
	'55-'56	All models	B-62 or B-26 B-60 or B-22	PONTIAC 'American	'39-'48 '49-'54	All models	B-60 or B-21 B-62 or B-25	(American)			
D. 00mg		All models	B-63 or B-48	Series 25, 27)	'55-'56 '56	All models (except '56 S.W.) Safari & 870 S.W. with	B-60 or B-21	PONTIAC (Canadian)	'39-'48	All models	C-8
DeSOTO	'49-'52	All models All models	B-61 or B-23 B-60 or B-21		'56	Dual Exhaust 870 S.W. with Single Exhaust	B-65 or B-51 B-60 or B-21		'51-'55	All models	C-18
	'55-'56	All models All models	B-62 or B-26 B-60 or B-22		'56 '57	860 S.W. with Single Exhaust All models (except		RAMBLER	'56-'58	All models (except '58 American)	C-19
DODGE	-	All models	B-63 or B-48		'57	Safari Chieftain) Safari Chieftain	B-65 or B-51		'58	American	C-18
JODGE	'49-'52	All models All models	B-61 or B-23 B-60 or B-21 B-62 or B-25	1	'58	All models	A-11 B-60 or B-21	STUDEBAKER	'50	Commander & Land Cruiser	C-12
	'55-'56	All models All models	B-62 or B-26	PONTIAC (Canadian	'39-'52 '53-'54	All models All models	B-61 or B-23 B-63 or B-40	VOLVO		All PV-444 models	
EDSEL	'58	Pacer & Ranger	B-63 or B-48 B-64 or B-49	Series 20, 22)	'55-'57	All models (except Convertible) Convertible	**	WILLYS	'46-'55	All Jeeps	B-37
		Citation, Corsair & S.W.	B-65 or B-51		'58	All models	A-13 B-33		'56-'58	S.W. 2 wheel drive CJ-3 Jeep, 2 & 4 wheel drive	B-37 B-39
FORD	'49-'55 '55-'57	All models (except '55 T.B.) Thunderbird	B-60 or B-21 B-44	RAMBLER	'51-'55 '56-'58	All models All models (except '58 American	A-43 or B-43 B-33			1 Ton Truck	B-37
	'56 '56	All models (except Fairlane) Fairlane series	B-60 or B-21 B-64 or B-49	CWILDEDAKED	'58	American All models	B-61 or B-23			ACCESSORIES	
	'57 '57	All Passenger Cars (except Skyliner)	B-64 or B-49	STUDEBAKER	'51-'54	All models All models	B-61 or B-24 B-36	EXTENSION			
	'57-'58 '58	All S.W. & Ranchero Skyliner	B-65 or B-51		'55 '56-'58	All models	B-61 or B-24	(2 hose of	ach set)	60" length For cars v inflating and deflating the REAL	Air Lift Culinders.
	00	All Passenger Cars (except Convertible & Skyliner)	B-60 or B-21	VAUXHALL	'52-'57	Velox	B-61 or B-24	GAUGES		Pencil-type Cambrated	from 4 to 50 por is
	'58 '58	Convertible, S.W. & Ranchero Thunderbird	B-64 or B-49 A-14	VOLVO		All PV-444 models	** P.02	For me	easuring	pressures in the Air Lift Cyline	ler and Tires
HENRY J.	'51-'54	All models	B-61 or B-23	WILLYS	'46-'55 '56-'58	All Jeeps S.W. 2 & 4 wheel drive	B-61 or B-23 B-61 or B-23 B-60 or B-21	FOR LIGHT I	OUTY T	RUCKS WITH PICKUP AND PA	NEL TYPE BODIES
HUDSON	'36-'48	All models	B-62 or B-25		'56-'58 '56-'58	CJ-3 Jeep, 4 wheel drive CJ-5 Jeep	B-60 or B-21 B-20 HD B-60 or B-21	NOT REC	OMMEN	E FOR ADDED CAPACITY UDED ON MODELS WITH DUAL	WHEEL AXLES
(See RAMBLER)	'48-'54 '55-'57	All Stepdown models Hornet & Wasp	B-27 B-32		'46-'58 '57-'58		B-60 or B-21 B-20 HD	IMPORTANT:	—Listin	gs below are not to be considered	d complete coverage
IMPERIAL	'55-'56 '57-'58	All models	B-60 or B-22 B-63 or B-48		'57-'58	Dispatcher			in -th	e light truck field. Availability	of packages for
KAISER	'46-'52	All models	B-60 or B-21	CAR	YEAR	MODEL	FRONT PKG. NO	TRUCK	YEAR	MODEL	REAR PKG. NO.
LINCOLN	'49-'54	All models	B-60 or B-21	BUICK	'40-'53	All models	C-11	CHEVROLET	'47-'53	½ Ton	B-16 HD
	'55 '56-'57	All models	B-65 or B-51 B-64 or B-49		'58	All models	C-13	—1st series	'54 '55	½ Ton ½ Ton	B-60 HD or B-21 HD B-60 HD or B-21 HD
MERCURY	'58 '49-'56	All models	A-15 B-60 or B-21	CADILLAC	'36-'49	All models	C-11	—2nd series*	'55	½ Ton (3100) (3200)- -% Ton (3600)	B-19 HD or B-13 HD
-	'57-'58	All models	B-65 or B-51	CHEVROLET	'39-'48	All models	C-8		'56-'58	½ Ton (3100) (3200) - -34 Ton (3600)	B-19 HD or B-13 HD
METEOR	'49-'55 '56	All models	B-60 or B-21	CHRYSLER		All models	C-7 C-11	FORD	'53-'50		B-19 HD or B-13 HD
	'56	(except Niagara & Rideau) Niagara and Rideau	B-60 or B-21 B-64 or B-49		'49-'54	All models	C-12		'53-'56 '57-'58	% Ton, F-250	B-19 HD or B-14 HD B-17 HD
	'57 '57	All models (except S.W.) Station Wagon	B-64 or B-49 B-65 or B-51	DeSOTO		All models	C-7 C-11		'57 '58	Ranchero Ranchero	B-65 or B-51 B-64 or B-49
	'58	All models (except Convertible & S.W.)	B-60 or B-21		'46-'48 '49-'54	All models All models	C-12		-		B-16 HD
Wall bar	'58	Convertible & S.W.	B-64 or B-49	DODGE		All models	C-7	G.M.C. —1st series	'55	1 ½ Ton (100) ½ Ton (100)	B-16 HD B-19 HD or B-13 HD
MONARCH	'49-'56 '57	All models	B-60 or B-21 B-65 or B-51		'50 '50	All D-34 models (except Cl Cpe. & 4 dr. sedan.) All models incl. D-34 Cl.	C-12	—2nd series*	'55 '56-'5	½ Ton (100), ¾ Ton (150) ½ Ton (100), ¾ Ton (150)	B-19 HD or B-13 HD
NASH (See RAMBLER)	'36-'48 '49-'57	All leaf spring models All models	B-61 or B-23 B-32		751 759	Cpe. & 4 dr. sedan. Wayfarer	C-7 C-7	STUDEBAKE	R '49-'5	B ½ Ton	B-15 HD
OLDSMOBILE	'41-'51	All coil spring models	A-100		'51-'52	Deluxe & Custom Coronet Sixes, D47, D52 (except 4 dr.	C-12	WILLYS		8 1 Ton Truck	B-60 HD or B-21 HD
	'51 '51-'56	Model 98 only All leaf spring models (except '51-98)	B-65 or B-52 B-60 or B-22		00- 04	Suburban) All Eights, Sixes D46, D51 &	C-7			B FC-150	B-20 HD
	'57-'58	All models	B-65 or B-52	1		D52 4 dr. Suburban	C-12	*Chevrolet & C Windshield.	G.M.C. '5	5 2nd Series easily identified by '	'wrap around"
**Available	on spec	ial order.						ir indanieid.			
					-						

Leslie's

## Jacks, Couplers, Helper Springs, Mirrors



#### NORLIPP MIRROR

N-25 (460) Trail-Vue Mirror

N-27 (462) Support arm only

N-28 (422) Mirror head only

TD-15 TD-16

**Boltfast Trailer Hitch** 

BF-1 Aluminum finish

BF-2 Chrome finish

Wt. 2 lbs.

Wt. 1 lb.

K-10

Wt. 1/2 lb.


#### NORLIPP

#### Chrome and Aluminum Car-Trailer Mirror No. 460

Rustproof, shockproof, sturdy, durable; Large 5" dia. mirror head with 29 sq. in. area of vision; swivel ball and socket adjustments at base and head of mirror allows complete freedom in positioning and holding mirror as set; telescopes from 91/2" to 20"; locks firmly at any desired length; clamps on door, no holes to drill.

NEW-Bracket for Easier mounting. Can be clamped on or mounted with sheetmetal screws on either right or left side of car.

Hinge at bracket allows arm to be raised or lowered 180°.



Made entirely of steel. Finished in aluminum with Cadmium plated bolts.

A-50 Wt. 3 lbs.

Pyramid Stabilizing Jack


Made of strong steel, aluminum finish.

(set of 4) Wt. 35 lbs. TD-16 each Wt. 9 lbs.



Levels, stabilizes, supports your trailer, Ends all annoying sway, twisting and vibration of trailer when parked. All Steel,

K-10 Set of 4. Wt. 48 lbs. K-11 Each, Wt. 12 lbs.



Rugged All Steel Bumper Clamp

Fits practically any bumper. Will handle any load the bumper can safely carry. Rubber cushion prevents marring surface of bumper. High tensile alloy steel used at points of greatest stress. Hole is for 5%" ball bolt. (Ball is not supplied.)


F-25 Wt. 8 lbs.



This new jack is made of the same alloy used in the famous B-52 aircraft. It is both lightweight and extremely strong.

CA-10 Stack jack B52 (set of 4) CA-11 Stack jack B52, each

Wt. 14 lbs. Wt. 4 lbs.



#### NORLIPP TRUCK MIRROR

Heavy-duty "Western Style" Truck Mirror UNI-VERSAL—fits all trucks including wrap-around windshields; extra large, with 144 square inches of vision; double strength glass sealed in rubber, shock and water proof; heavy-duty extension arms lock securely in any position; universal mounting brackets fit all cabs, in pairs; wt. 10 lbs. each.

N-29 Norlipp No. 490 with 4 extension arms N-30 Norlipp No. 491 with 4 extension arms

and I arm support N-31 Norlipp No. 492 arm support only



Ace Helper Springs

Simplicity, strength and ease of installation combined with low cost make Ace helper springs a necessity; fit between rubber bumpers on frame of car and retaining bases which bolt on rear axle; the helper spring bases remain on axle; springs can be removed or replaced as desired merely by jacking up car. One model fits all make cars.

A-120 Wt. 10 lbs.



Tour-Aid Aluminum Stabilizer Jack



Wt. 13 lbs.

Light weight . . . high capacity . . . adjustable from 11" to 18" . . . adjusting screw is steelworking in steel. Each jack capable of supporting 6 tons! Conical shape permits nesting for travel storage.

T-40 Tour-Aid jacks, set of 4

T-41 Tour-Aid jacks, each Wt. 4 lbs.

Leslie's

Wt. 45 lbs.

Wt. 45 lbs.

Beautiful! Rugged! Easy to Install! A bolt-on type hitch to match the beauty of your car, yet rugged enough to safely tow any trailer; spe-

cifically designed and engineered to fit your

car; tow pressure on frame as it should be; ac-

commodates any standard size hitch ball.

Specify year and model of car

## Atwood Jacks, Couplers, Towing Units

#### Jack Foot Nos. 204 and 206

Adjusts itself on uneven ground automatically; designed to replace casters when required or desired on permanent locations; swivel tilting base is 8" square; tested at over 3,000 lbs. weight down pressure with no distortion.

(204 Jack foot to fit ram end of 420 jack mfg'd since March, '51 Wt. 7 lbs.

A-16 (206) Jack foot to fit 625 jack Wt. 7 lbs.

**Dual-Ball Towing Unit 97** 

With a 2-in, ball for 5,000 lbs, and under and a 2-5/16-in, ball for 5,000 to 10,000 lbs. Swirching coupler ball sizes can be done in a matter of seconds. The unit complete can be bolted or welded to your towing bracket.

A-1 Complete unit.

Wt. 14 lbs.

A-2 Less balls.

Wt. 7 lbs.

A-3 Locating pin for towing unit

#### **New 925 Heavy Duty Coupler** for 2-5/16" ball

New exclusive welded model used in combination with new No. 625 jack. Differs from 921 and 922 only in respect to the larger hole required to handle No. 625 jack.

Wt. 21 lbs.

#### New 625 Heavy Duty Jack

New heavy-duty jack designed to handle 10 wides, two-story mobile homes, and the longer, heavier, front-end models. The companion unit is the new heavy-duty coupler No. 925. New features of this jack are: I-larger outer housing tube to contain larger, heavier ram tube that has nearly double the ram strength of 420; 2-adjustable extension handle for more leverage to gain easier front-end lifting, and more lift has been added; and 3-larger diameter bearings in the same standard vertical roller bearing caster.

A-5

Wt. 26 lbs.

#### Reducer Bushing 6890

To simplify changeover from 2" ball with 1" shank to 2-5/16" ball with 1\%" shank. With this bushing available only one 1\%" hole is needed in ball mounting platform; remove 2-5/16" ball, insert this bushing and install 2" ball with 1" strank.

#### Jack Base and Wheel Chock 101

Simple unit to keep front end of trailer rigid; keeps caster wheel from sinking into ground; also to block trailer or tow car wheel on grade; or turned upside down in soft ground to form base for jack when changing tires.


A-45 Wt. 5 lbs.

#### 378-379 Stabilizing Jacks

5° outward tilt provides firm, secure foundation; prevents sideways movement; pivoted handle rotates sleeve around screw; large ribbed foot swivel and tilt mounted to fit ground slope; clamped against trailer floor for traveling; must be used in pairs due to 5° tilt; maximum ca-pacity 3000 lbs.

A-30 (378) For heights 15" to 19" Wt. 6 lbs.

A-31 (379) For heights 12" to 16" Wt. 6 lbs.

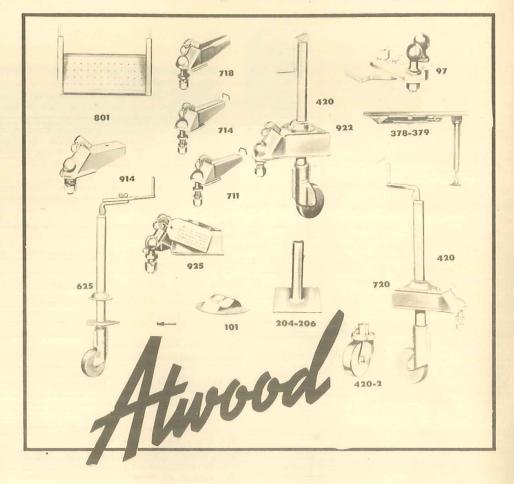

#### Complete 420 Jack, 720 Coupler for 2" ball

With permanent, non-removable operating handle; enclosed sleeve-type lifting ram; when ram is raised caster is automatically released from ram shaft; no set screws; over 4" more handle height to clear gas tanks; maximum height from ground to coupler 251/2"; clearance from coupler to handle 18"; 1200 lbs. lifting capacity.

A-35 Wt. 35 lbs.

#### Complete 420 Jack, 922 Coupler for 2-5/16" ball

This unit gives you the new heavy-duty coupler required for mobile homes weighing from 5,000 10,000 lbs.; increased depth of adapter to 3%"; bigger neck to take heavy 2-5/16" ball with 1%" shank; jack same as A-35.

A-48 Wt. 42 lbs.

#### Replacement Parts for A-35 & A-48

A-13 2" Ball. Wt. 21/2 lbs.

Lock washer I" for 2" ball A-21

Lock washer 1%" for 2 5/16" ball A-22

A-29 Jack less Caster. Wt. 8 lbs. A-34 Housing Cap. Wt. 3 oz.

A-36 Outer Housing Tube Assembly. Wt. 6 lbs.

A-37 Ram Assembly, Wt. & lbs.

Caster. Wt. 8 lbs. A-38

A-39 Handle Assembly. Wt. I lb.

Thrust Bearing Assembly, Wt. 1 lb. Bottom Plate. Wt. 2 lbs. Coupler for 2" Ball. Wt. 10 lbs. A-40

A-41

A-42 Locking Lever for Coupler. A-43

Jack Assembly comp. Wt. 22 lbs. A-44 2-5/16" Ball. Wt. 5 lbs A-46

Coupler for 2-5/16" Ball. Wt. 15 lbs.

#### 711 Coupler with 2" ball

Strong, sturdy, fits inside a straight longue constructed of three inch channel iron or outside a two-inch or smaller tongue. Attaching shank eight inches long. Easy to operate. Can be padlocked. Anti-rattle. Complete with 2-inch ball.

A-20 Wt. 7 lbs.

#### 914 Coupler with 2-5/16" ball

Heavy-duty, bull-necked coupler for any straight-shank coupler towing job. It's head-end construction is identical with Atwood 921 and 922 coupler . . . has same big 2 5/16" forged steel ball. For straight tongue jobs on 5,000 to 10,000 pound pulls with maximum SAFETY.


Wt. 15 lbs.

#### Folding Trailer Step No. 801

Angle brackets, side arms and tread made of steel, zinc-plated to resist rust. When getting ready to travel, this STEP can be slid back out of sight under trailer body, where it is held firmly by spring catches in the angle brackets. Tread size 8" by 20". Safe, neat and reasonably priced.

A-32 Wt. 11 lbs.



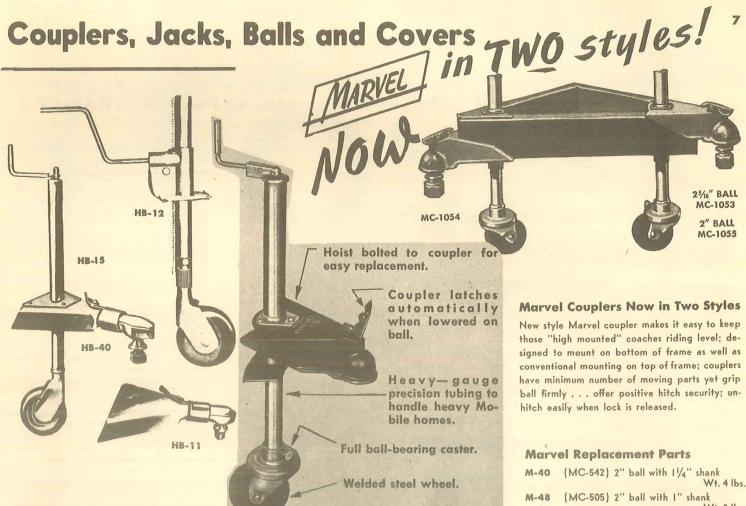

**Bull Dog Jacks and Couplers** 

Ease of operation; 50° angle tongue-end; parking jack features easy gear type operation; plate designed for simple attachment.

HB-11 Coupler only for 2" ball.

Wt. 15 lbs.

Parking jack only. Wt. 12 lbs. HB-12

Parking jack only. Wt. 23 lbs.

Coupler for 2-5/ 6" ball,

Wt. 20 lbs.

#### Bull-Dog Balls—Drop-forged Steel

HB-22 134" Ball with 34" shank

HB-23 13/" Ball with I" shank

HB-24 2" Ball with 1" shank

HB-41 2-5/16" Ball with 11/4" shank



#### Machined Steel Balls (Wt. 8 lbs.)

(24) 2" ball, 11/4" stem, 4" high T-24

(25) 2" ball, 11/4" stem, 5" high T-25

(34) 2-5/16" ball, 11/4" stem, 4" high T-34

(35) 2-5/16" ball, 11/4" stem, 5" high

THE NEW style Marvel Coupler makes it easy to keep those "high mounted" coaches riding level. Now Marvel offers a coupler designed to mount on the bottom of the frame as well as a coupler for conventional mounting on top of the frame. By selecting the proper style you can adjust the "hitch level".

Marvel couplers have a minimum number of moving parts yet they grip the 25/16" ball firmly . . . offer positive hitch security . . . unhitch easily when lock is released. The heavy, steel casting is protected by extra strong sections at all points of stress or wear. You can be sure they exceed ICC requirements for the "over 5,000 pound" category.

> The conventional model is also available for 2" balls. Marvel Complete Assemblies

Wt. 3 lbs. M-49

(MC-507) Caster and wheel assy. Wt. 9 lbs.

M-50 (MC-553) Hoist (less caster) for discontinued MC-1030 combination

Wt. 14 lbs.

M-52 (MC-509) Cap handle assy. Wt. 2 lbs. (MC-551) Inner tube assy. Wt. 5 lbs. M-53

M-91 (MC-574) Coupler (conventional

mounting) for 2" ball Wt. 10 lbs.

M-92 Hoist MC-566 with caster Wt. 24 lbs.

Hoist MC-566 less caster Wt. 16 lbs.

(MC-540) 2-5/16" ball with 11/4" shank Wt. 5 lbs.

(MC-564) Coupler (conventional) for 2-5/16" ball

Wt. 16 lbs.


(MC-571) Coupler (inverted) for 2-5/16" ball Wt. 16 lbs.

M-90 (MC-1055) Hoist and coupler with 2" Wt. 35 lbs. ball

(MC-1053) M-94 Hoist and conventional

coupler with 2-5/16" ball Wt. 40 lbs.

(MC-1054) Hoist and inverted coupler with 2-5/16" ball Wt. 40 lbs.



#### **Chrome Plated Ball Cover**

Attractive; adds to appearance of car and keeps grease on ball from rubbing off on clothing; fastens securely to ball with Allen set screw; Allen wrench furnished.

EC-25 For balls 2" and less. Wt. 21/4 lbs.

EC-26 For 2-5/16" ball, Wt. 4 lbs.

Leslie's

SOUTH'S












SAFETY





## TORQ-LESS AXLE

PATENTED

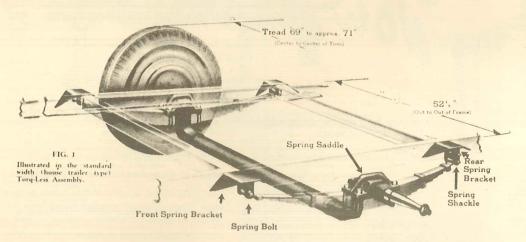

#### TORQ-LESS SINGLE and TANDEM AXLE ASSEMBLIES with Either STRAIGHT OR DROP AXLE

(Complete information available on request)



## BRAKE CONTROL break-a-way switch



### Synchronized braking. No tapping hydraulic lines. TWO INDEPENDENT **BRAKING SYSTEMS**

Operates off car brake pedal OR steering column control. You may use either as desired.
Built in hill holder.
No "grab." One second adjustable brake pres-

sure control.

Easily installed -

For use with either Kelsey Hayes or Warner Electric Brakes.

SBC-6 Sure-Stop brake control, 6 volt

SBC-12 Sure-Stop brake control, 12 volt

Sure-Stop 12 volt Relay and Resistor Block only for changing 6 volt Sure-Stop to 12 volt

#### FLAT BASE WHEELS-Wt. 29 lbs.

Wheel 15 x 550, 5 hole HA-25

ENGINEERED

TYPES OF

Wheel 15 x 550, 6 hole HA-26

#### RINGS FOR FLAT BASE WHEELS

Solid ring for 15 x 550...wheel HA-28

Solid ring for 16 x 550 wheel HA-29 HA-30

Split ring for 15 x 550 wheel Split ring for 16 x 550 wheel HA-31

#### CENTER WHEELS—Wt. 23 lbs

**HA-35** Wheel 15 x 550, 5 hole

Wheel 15 x 6, 5 hole, TUBELESS **HA-36** 

**HA-37** Wheel 15 x 550, 6 hole

Wheel 15 x 6, 6 hole, TUBELESS **HA-38** 

#### **ACCESSORIES FOR 5 HOLE WHEELS**

Hub cap HA-45

HA-46 Hub and cup assy.

Bored brake drum HA-47

**HA-48** Hub and drum assy.

HA-49 Grease cap

#### **ACCESSORIES FOR 6 HOLE WHEELS**

HA-50 Hub cap

HA-51 Hub and cup assy.

HA-52 Bored brake drum

HA-53 Hub and drum assy.

HA-54 Grease cap

#### Stromberg Hydraulic Brakes

Instantly coupled and uncoupled! Connected directly to hydraulic system of towing car by simple one-lever operation—and is easily uncoupled by merely releasing the latch; syn-chronized braking — Smooth Stopping — No Jolts- No Jars.

ST-1 2-wheel brake set.

Wt. 58 lbs. 4-wheel brake set.

Wt. 98 lbs.

ST-10 Coupler housing only. Wt. 7 lbs.

5T-11 Coupler with master

cylinder. Wt. 11 lbs. ST-12 Brakes, only, per pair. Wt. 38 lbs.


ST-30 Towing vehicle kit. Wt. 3 lbs.

ST-50 Hand control kit. Wt. 6 lbs.

# and barness.

Combination **Terminal Block** and Breakaway Switch

· Chrome plated



#### **ELIMINATES GROUNDS AND SHORTS**

- Easily Mounted in "A" Frame of any Trailer
- All harness wires fitted with Terminal lugs


 All wires A.T.A. color coded

SBC-25 Sure-Stop Break-A-Way Switch and Harness

Leslie's HE SOUTH'S FIRST and FINEST

## WARNER ELECTRIC BRAKES FOR 3500 LBS.

MAXIMUM GROSS AXLE LOAD FOR 16" WHEELS



Includes kit for trailer, kit for car, and 2 drums

May be bored and drilled to fit any 12" x 13/4"

For use on cars having 12 or 24 volt electrical

systems; these will correct voltage to the proper

6 volts for which the brake is designed. Wt.





H-23

H-76



NON AIR-GAP MAGNET

H-77

#### Warner Kit #1-26002 for Trailer

-set (2) 12" x 13/4" brakes (31/8" bolt circle), armatures, armature mounting accessory, grease guards and axle adapters

I -brake mounting accessory

I -coupling plug (2 way)

I —wire clamp accessory for trailer

35'-#12-2 conductor wire

H-26 Complete kit Wt. 57 lbs.

HYDRAULIC CONVERTER

H-80 Hydraulic converter only

H-25 35-ft. wire 12-ga. 2 cond. Wt. 21/2 lbs.

#### Twist-Lock Brake Connector Wt. 6 oz.

For 3/16" or 1/4" hydraulic fittings depending

on what type car installation will be made on.

One of these is essential for installation of the

H-23 Plug-2 way, Socket-2 way H-29

from electric to

**ACCESSORY KIT** 

H-81 3/16" fittings

for Hydraulic

Converter

concerter

hydraulic brakes.

H-76 Plug-3 way H-77 Socket-3 way

### Warner Kit #8183-A for Car

I -controller, 2 brake, including hand lever and lever mounting accessory

-wire clamp accessory 20'-# 12-2 conductor wire

I —coupling socket mounting accessory

-coupling socket (2-way) -coupling socket bracket assembly

Complete kit Wt. 7 lbs. H-32

H-33 Kit less wire Wt. 6 lbs. Car controller Wt. 4 lbs. H-28

H-80

20-ft. wire, 12-ga. 2 cond. Wt. 11/2 lbs. H-35

#### Replacement Parts for **Trailer and Car Kits**

H-49 Magnet, Wt. 141/2 lbs. H-50 Armature, right hand, Wt. 81/2 lbs.

Armature, left hand, H-51 Wt. 81/2 lbs.

Band and lining assembly

Band spring

Magnet spring Magnet wire assembly

Brake lining kit

H-52 H-53 H-54 H-55


#### 1/2 16. H-47 Resistor for 4 brakes

H-20 Wt 93 lbs.

H-27 Wt. 14 lbs. ea.

DRUMS

brakes.



Resistors for Brake System

#### **Emergency Break-Away** Assembly

Complete, Wt. 11/2 lbs. H-44 H-45 Coupling cable hookup

H-46 Chain attachment only


only




#### KELSEY-HAYES BRAKE CONTROLLER



Adjustable ... Automatic and Manual; trailer brakes can be applied manually or by pressure on car brake pedal through hydraulic connection included with kit. Handle knob adjustable for varying load and Wt. 4 lbs. road conditions.









Use this device to operate any 6-volt electrical accessories such as radio, heater, etc., from 12-volt system

Our No. CH-230 Wt. 1 lb.


1/4" fittings

### BREAKAWAY DEVICE

Automatically sets trailer brakes in case of breakaway from tow car!

H-82

Our No. BP-179 (63-BD) Breakaway Device




#### Kelsey-Hayes Electric Brakes

Controller permits current to flow through (1) electro-magnet which is attracted to armature disc (2), which is attached to and rotating with brake drum (3). The frictional and magnetic force developed by magnet against armature disc draws the lever in the direction in which brake drum is rotating. Movement of lever (4) changes the position of actuating block (5), spreading brake shoes (6), so they press on drum. This lever action multiplies the magnet force, providing a smooth, powerful action.

(30963) Single band 12" x 2" KH-122-1

(39742) Two-shoe adjustable KH-122-2

(40839) Two-shoe adjustable KH-102-2



#### **Kelsey-Hayes SELECTIVE RESISTOR**

A selective current-reducing unit for use with 12-volt cars when pulling trailers equipped with 6-volt electric brakes.

Our No. KH-2 Wt. 1/2 lb.



## 60-Q-3 SERIES 35 AMPERE 120 VOLT Grounding Type Electrical Fittings for Mobile Home and Park





60-O-3-PR-O

Park Receptacle with cover, mounted in completely weatherproofed box for outside installation. One inch (I") threaded opening in box for attaching conduit. Spring operated cover locks matching male plug into receptacle.



Park Receptacle with cover, for mounting within, or on side or bottom of enclosed




60-Q-3-PR

Park Receptacle with cover, mounted in steel outlet box for installation under protected covering.

60-Q-3 Completely Matched — Polarized — Grounded — 35 Ampere 120 Volt Electrical Hook-Up between Mobile Home and Park

60-Q-3-M Male Plug For Park end (power receiving end) of entrance cable. Matches 60-Q-3 series park receptacles.



We recommend No. 8-3 conductor service entrance cable for use with 60-Q-3 fittings. No. 8-3 Neoprene covered cable available in coils or any desired length.


60-Q-3-F Female Plug

60-Q-3 Connector

60-Q-3-B Male Base

60-Q-3 Connector consists of male base and female plug with two current carrying terminals plus an equipment ground terminal. Male base is easily installed on the side or underneath the coach body by means of 3 screws. Requires only 17/8" opening for mounting. Screw holes are countersunk, and flange is grooved for mastic to provide a moisture-proof installation. Spring actuated cap locks female plug into male body when connected, acts as weather protection in travel. Specially designed terminals and large terminal screws provide a simple means of attaching wires to terminals. Cable clamps attached to male and female plugs relieve strain on wire connections. Heads of terminal screws in all plugs and receptacles are colored, and bases are marked with corresponding letters to eliminate any guesswork in making proper wire connections.

### CONVERTOR ADAPTORS FOR USE WITH 60-Q-3 SERIES PARK RECEPTACLES



60-Q-3-CA For Converting 60-Q-3 Receptacle to standard 2 pole outlet.





For other type mobile home connectors, convertor adaptors are easily assembled by connecting a 60-Q-3 male plug to a female plug which matches the connection on the mobile home (see illustrations). For a permanent connection, wherever possible, re place the male plug on the service entrance cable with a 60-Q-3 male plug to match the 60-Q-3 park receptacles.



60-Q-3-A Adaptor Converts 60-Q-3-M Male Plug to standard 2 pronged plug for a temporary hook-up only. An added convenience for mobile home owners when traveling. Rubber Collar weatherproofs



60-Q-3-XA Cord Connector Assembly Male and female Plugs for connecting two lengths of No. 8 3 conductor cable. Weatherproofed - Polarized.

B-70 (60-Q-3-B) (60-Q-3-F) B-73 (60-Q-3-M)

(No. 8-3) BP-2 (60-Q-3-CA) BP-3 (60-Q-3-X) BP-4 (60-Q-3-XA)

BP-5 (60-Q-3-A)

BP-39 (60-Q-3-RW)

BP-150 (60-Q-3-PR-0) BP-151 (60-Q-3-PR)

BP-153 (60-Q-3)

Male base emale plug Male plug No. 8-3 conductor cable, ft. Adapter to standard 2-pole outfit Female plug with rubber collar
Cord connector assembly including 60-Q3-M male plug and 60-Q-3-F female plug
Adapter for temporary hook-up only
Female park receptacle with cover, for mounting in enclosed box Female park receptacle with cover, weatherproofed, for outside installation Female park receptacle with cover, for installation under protected covering Connector including 60-Q-3-F female plug and 60-Q-3-B male base


#### **Conversion Receptacle**

Modernizes old fashioned 2-wire, inadequate, unsafe outlets with approved, low cost ground type 35 ampere, 120 volt receptacle.

- · Utilizes existing meters, fuses, wiring and outlet boxes in enclosure.
- · Matches intake equipment found on majority of mobile homes.
- Metal cover of receptacle locks male plug into position.  $4^{1}/_{2}$ " x  $3^{1}/_{8}$ " steel plate mounts on standard 4" rectangular outlet box.

BP-149 (60-Q-3-RPW) PARK RECEPTACLE complete with cover permanently mounted on heavy gauge steel plate.

BP-240 (60-Q-3-RP) PARK RECEPTACLE less metal covering on bakelite receptacle.



Leslie's THE SOUTH'S FIRST and FINEST




# LEKTRO-LINE 50 AMPERE 120/240 VOLT Grounding Type Electrical Fittings for Mobile Home and Park

Pa co

50-PR


Park Receptacle with cover, mounted in weatherproof outdoor type box, Locking ring locks matching male plug into re-

ceptacle... locks cover when not in use. One and one quarter inch (1-1/4") threaded opening in box for connecting to conduit.



50-A-R

Park Receptacle with cover for mounting within, or on side or bottom of enclosed box. See Installation C-G & H 3550 Universal Lektro-Line Park Receptacle



Consists of 60-Q-3-R-W 120 V 35 ampere female outlet and 50-A-R Lektro-Line 120/240 V 50 ampere female outlet mounted on weatherproof cast aluminum box. Overall dimensions 8" x 6" x 7-1/4". Sufficient

space inside for wiring and splicing.

No. 3551 same as 3550 except 1-1/4"
tapped hole is in top instead of bottom of box.


## Completely Matched—Polarized—Grounded—Weatherproof—50 Ampere 120/240 Electrical Hook-Up between Mobile Home and Park

For park end (power receiving end) of entrance cable.

Matches Lektro-Line series
park receptacles.




We recommend only four conductor entrance cable, consisting of three No. 6 conductors and one No. 8 ground wire, for use with 50-A Lektro-Line fittings. Available in coils or any desired length.

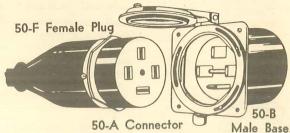


A ruggedly constructed assembly . . . engineered to meet all electrical demands of the most modernly equipped mobile homes for years to come. Three heavy duty, specially designed, current carrying terminals plus an equipment ground terminal for power and safety. Connector consists of Male Base receptacle for mounting on mobile home body (requires only 27/8" opening for mounting) and matching Female Plug. Park Receptacles with matching Male Plug

available as an assembly or as separate units. All fittings weatherproofed throughout. Locking ring locks plugs securely into male and female receptacles when connected . . . keeps cover securely closed when not in use. Heavy duty terminals and bakelite cores are color coded to facilitate wiring. Cable clamps attached to male and female plugs relieve strain on wire connections.



Kit Assemblies for 60-Q-3 and 50-A Lektro-Line Fittings Includes connector, male plug and 25 feet of proper sized entrance cable (No. 8 3 conductor for 60-Q-3 fittings, and 3 No. 6 conductors plus 1 No. 8 ground for Lektro-Line fittings). Cable with male and female plugs attached ready for use is individually boxed for shipping with mobile home. Eliminates possibility of tripping over cord or misplacing fittings. Other kit assemblies including adaptors and park receptacles also available. See price list for various kit combinations.



Male and female plugs for con-

50-A-XA Lektro-Line

Cord Connector

Male and female plugs for connecting two lengths of 4 conductor cable. Completely weatherproofed and polarized. 50-A-X Female Plug only with rubber collar and rubber boot.

BP-154	(60-Q-3K)
BP-200	(50-A)

BP-201 (50-B) BP-202 (50-F) BP-205 (50-A-XA)

BP-206 (50-A-X)

BP-210

BP-211 (50-PR)

BP-212 (50-A-M) BP-215

BP-216 (50-A-R)

receptacles also available. So for various kit combinations.

Kit assembly made to order on request Connector for 120/240, 50 ampere including 50-F female plug and 50-B male base Male base

Female plug
Cord connector assembly including 50-A-X
female plug with collar and boot and 50A-M male plug (cable not included)
Female plug with rubber collar and rubber

remale plug with rubber collar and rubber boot Lektro-Line park outfit including 50-PR park receptacle and 50-A-M male plug Female park receptacle with weatherproof

outdoor type box Male plug Four conductor entrance cable consisting of three No. 6 conductors and one No. 8

ground wire, ft.
Female park receptacle with cover for mounting in enclosed box

BP-217 BP-218 (50-A-RB)

BP-218 (50-A-KB

BP-230 (3550)

BP-231 (3551)

BP-231 (3551)

BP-235

BP-236

Park outfit including 50-A-R female park receptacle and 50-A-M male plug

Cast aluminum box

Kit assembly for 50 ampere made to order on request

Universal Lektro-Line park receptacle consisting of 60-Q-3-RW female outlet and 50-A-R female outlet mounted on weatherproof cast aluminum box with 11/4 inch hole tapped in bottom of box

Universal Lektro-Line park receptacle consisting of 60-Q-3-RW female outlet and 50-A-R female outlet mounted in weatherproof cast aluminum box with 11/4 inch hole tapped


in top of box Lektro-Line park outfit consisting of 3550 park receptacle with matching male plugs 60-Q-3-M and 50-A-M

Lektro-Line park outfit consisting of 3551 park receptacle with matching male plugs 60-Q-3-M and 50-A-M


Leslie's

## CLASS-A NEW

BARGMAN



## Reflecto-Light DIRECTIONAL SIGNAL PLUS REFLECTOR



#### Trail-Lite 98 Single Lamp Model

Incorporates one double filament lamp which may be connected only to Bell system of wiring in an automobile.

BP-9812 Trail-Lite 98. 12 volt

Trail-Lite 98, BP-9868 6-8 volt TROUL 34

Meets all SAE requirements for Class A fixtures. Surface mounting. Outside diameter 65%", projection 2". A large light weight, high temperature red acrylic lens fits over a stamped steel backplate. A. small opening just large enough for the wires to be inserted is all that is required

in the body of the mobile home or truck.

Trail-Lite 99

Incorporates one single filament and one double filament lamp which may be connected to any wiring system.

BP-9912

BP-9968





Electrical Connectors,



Measures 45/8" wide by 21/8" high. Includes bracket for license plate. Mounts on surface, projects only 31/4". Wt. 21/2 lbs.

Aluminum finish, 6-v lamp B-17

Wt. 2 lbs.

LICENSE LIGHT

B-18 Chrome finish, 6-v lamp

B-90 Bracket only, aluminum finish

**Double Lamp Model** 

Trail-Lite 99, 12 volt

Trail-Lite 99, 6-8 volt

B-127 Aluminum finish, 12-v lamp

B-128 Chrome finish, 12-v lamp


B-91 Lens-cap


(721-5) Tubular glass lens B-92

Directional Signal, Stop, Tail Lights **Designed for Flush Mounting** 

TRAIL-LITE No. 8

TRAIL-LITE No. 9 2 Lamp Unit





A new "Class A" light. Completely new body design, with chromeplate rim which fits snugly against body for water tight seal. Brilliant Lucite lens with over 12 square inches of luminous area. Two-lamp unit connects to any wiring system used in tow car. One-lamp for only tow car using single-lamp system. Wt. 21/2 lbs.

BP-70 Single-lamp, 6-V bulb BP-135 Single-lamp, 12-V bulb BP-71 Double-lamp, 6-V bulbs Double-lamp, 12-V bulbs Lens for Trail-lite 8 and 9 **BP-136** BP-97 BP-98 Gasket for Trail-lite 8 and 9





#### Red and Amber Clearance Lights With Plastic Lens

Distinctively designed. Lightweight aluminum backplate, unbreakable plastic lens, lens gasket, sa candlepower lamp. Mount to body with screws. Wt. I lb.

B-66

B-130

Deluxe. 6" x  $2\frac{7}{8}$ " x  $1\frac{1}{4}$ " deep. 6-v bulb Deluxe light with 12-v bulb Standard. 5" x  $2\frac{7}{8}$ " x  $1\frac{1}{4}$ ". 6-v bulb Standard. 5" x  $2\frac{7}{8}$ " x  $1\frac{1}{4}$ ". 12-v bulb B-69 B-131

B-67

Lens only—RED Lens only—AMBER Lens gasket **BP-67** B-68

Safe Electrical Hook-up between Mobile Home and Tow Car

AND BRACKET


When female plug is disconnected, the male base of the trailer connector is protected against the weather with a stamped steel locking cover. Cover is permanently riveted to male base and swings to open or lock.

Male and female sections are securely locked together when connected. Rubber plug cover, which holds the female insert, is molded to fit snugly into the male base for a watertight seal. Brass cap on outside of rubber cover locks the female plug into the male base. Cap is easily turned to lock or unlock ..

B-220 (58-Q-8) Connector complete B-221 (58-Q-8M) Male receptacle

R-222 (58-Q-4-1) Female plug B-223 (58-Q-15) Female plug with brass cap

(58-Q-81) Female receptacle

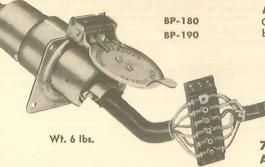

#### Bulbs

BP-160 3-21 c.p., 6-8 v.BP-165 21 c.p., 6-8 v. BP-161 21-6 c.p., 12 v. BP-166 21 c.p., 12 v. BP-162 21-6 c.p., 6-8 v. BP-167 2 c.p., 6-8 v. BP-163 3 c.p., 6-8 v. BP-168 1.5 c.p., 12 v.

6-Way Color-Coded Connector Assembly

Complete with color-coded 6-way cable, terminal block, and right-angle mounting bracket.

BP-180 Connector assembly complete

BP-181 Connector with bracket

BP-182 Car end (male)

BP-183 Trailer end (female)

BP-184

Bracket only Color coded cable, per foot BP-185

BP-186 Terminal block with cover

BP-189 Kit for converting 6-way conn. to 7-way

#### 7-Way Color-Coded Connector Assembly

Complete with color-coded 7-way cable, terminal block, and right angle mounting bracket.

BP-190 Connector assembly complete

BP-191 Connector with bracket


BP-192 Car end (male)

BP-193 Trailer end (female)

BP-194 Bracket only

Color coded cable, per foot BP-195 BP-196 Terminal block with cover

Leslie's THE SOUTH'S FIRST and FINEST

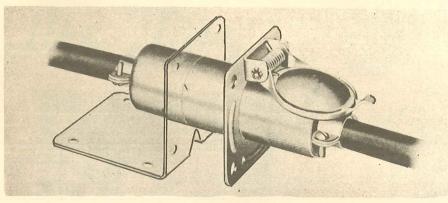

### MARVEL 6-WAY CONNECTOR —


Fitted parts so grooved they assemble only one way—the right way. Foolproof wiring. Terminals so numbered that no error can be made in connecting car socket to trailer plug. Outside housing made of steel with heavy rust-proof plating. Cover hinged to live side of connector equipped with heavy spring that holds it firmly against face of connector when car is not attached to trailer, protecting it from all weather. Safety-locking device holds in firm grip so there is absolutely no chance for two parts to sepaComplete assembly, including mounting bracket. Wt. 1½ lbs.

M-8 Complete assembly, without mounting bracket. Wt. 11/2 lbs.

Socket assembly (tow car end) Wt. 1 lb. M-9

M-10 Plug assembly (trailer-coach end) Wt. 1 lb.

M-11 Mounting bracket. Wt. 1/4 lb.

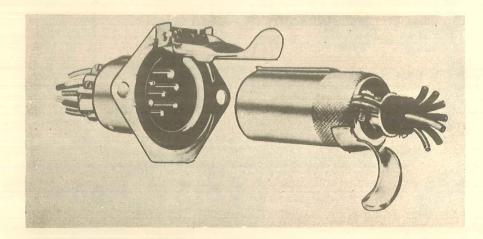

### MARVEL HEAVY DUTY 7-WAY CONNECTOR

Meets all requirements or the Standard for the mobile home industry and used by the American Trucking Association, Replaceable molded bakelite interiors, new type self-aligning phosphor bronze contacts with large surface areas to eliminate current loss.

Spring lock cover holds unit tightly in position and provides weather protection. Special cable holding clamp. Heavy gauge, drawn steel case never warps or cracks, Cadmium plated to prevent binding and "freezing".

M-31 Complete assembly. Wt. 21/2 lbs.

M-32 7-way socket. Wt. 11/2 lbs.

7-way plug. Wt. 11/2 lbs. M-33



This new development provides a trouble-proof receptacle and plug connecting the power circuit to the trailercoach. It incorporates the same principles proved successful in the six-way connector.

M-20 Plug assembly M-21 Socket assembly

Wt. 1/2 lb. Wt. 1/2 lb.




Carries light circuits from trailer to tow car. Socket is mounted to trailer hitch on tow car and plug is attached to front end of trailer. Spring wire clip locks plug securely into socket.

2-way connector carries tail light circuit, or other 6-volt connections, from trailer to tow car.

M-3 Socket assembly. Wt. 1/2 lb. M-4 Plug assembly. Wt. 1/2 lb.

4-way connector handles 3 circuits—tail light, stop lights, and either electric brakes or interior lights. The 4th wire is used as a common ground.

M-5 Socket assembly. Wt. 1/2 lb.
M-6 Plug assembly. Wt. 1/2 lb.



#### **Marvel Combination**

Neat, attractive installation, designed for mounting direct to body of trailer, eliminating the necessity of brackets and other means of mounting. Incorporates both stop and tail lights, using separate bulbs. Black enamel finish. Complete with bulbs.

M-30 Wt. 3 lbs.





#### **Clearance Lights**

Beehive style. Diameter 35/8", depth 17/8". 6-8 volt. Aluminum Vehicle Finish. Bulb included.

Flat surface mounting, no connector hole drilling required. Flat, hugs inside the rub rail. Diameter 3¾", depth 1¾". Takes either 6 or 12-V bulb. Aluminum finish.

G-1 Beehive clearance light with red lens.

G-2 Beehive Clearance light with amber lens.

G-3 Beehive lens, red.

G-4 Beehive lens, amber.

G-5 Flat clearance light with red lens.

G-6 Flat clearance light with amber lens

G-7 Flat lens, red

G-8 Flat lens, amber

G-9 Lens gasket





NEW SUPER 2-WIRE 20 amp., 250 volts





HH-3 (3221), 2-wire armored cap, male
HH-4 (3223) 7-wire armored body, female
NEW SUPER 3-WIRE 20 amp., 250 volts





HH-5 (3321) 3-wire armored cap, male
HH-6 (3323) 3-wire armored body, female




#### 110-Volt Connector

A sturdy, well-constructed connector with genuine bakelite plug and socket to resist weather and corrosion. Diameter of body is 13%".

BARGMAN LOW COST SWITCH AND OUTLET COMBINATIONS
Ready for Connection to 110-Volt System

CH-227 Socket CH-228 Plug





#### **Two-Prong Cord Connector**

Ideal for use between tow car and trailer, and many other uses. Two-Prong. — Hard Rubber Cover.

CH-200 Wt. 8 oz.



HH-7 (3421) 4-wire armored cap, male
HH-8 (3423) 4-wire armored cap, female

TWO-WIRE-CONNECTORS-AND-PLUG-BASE

HH-1 (7101) 2-wire female connector HH-2 (8808) 2-wire plug base, male

NEW SUPER 4-WIRE 20 amp., 250 volts

3421

3423

8808

7101

RUBBER DROP CORD

X-3 Standard. Wt. 4 oz.



No. 206 Rotary Switch Assembly with stainless steel back plate.
Our No. 8-206



No. 208 Single Outlet Assembly with Stainless Steel backplate. Our No. **B-208** 



No. 209 Double Outlet Assembly with stainless steel backplate.
Our No. B-209




No. 210 Single Outlet and Switch Assembly with stainless steel backplate.

Qur No. B-210




No. 211 Double Outlet and Switch Assembly with stainless steel backplate.
Our No. B-211





#### Heavy-Duty Rubber Drop Cord Connectors

X-6 Female connector
X-9 Male connector




BARGMAN

#### Female Receptacle With Rubber Cover

No. 59 Female Receptacle with rubber cover and strain relief clamp. Double spring phosphor bronze terminals for positive contact, Insert removable for connecting wires to terminals. Takes heavy cable for outdoor use. Strain relief clamp reduces tension on individual wires,

BP-40





0


0


## Service Entrance Assemblies

with "Bilt-In" ground for "Peace-of-Mind" Safety.

LIFE-LINE Step-Down Converter-Adapters







- Park Receptacle
- Temporary Adaptor Connector and Power Supply Cable
- Guarantee covering service and equipment All necessary parts for installation, nothing else

#### Service Entrance Assemblies Complete

HL-50 Model "50", 110-volt, 50 ampere HL-100 Model "100", 125/250-volt, 50 ampere

(1) PARK RECEPTACLES HL-1 (MED 5000-1) 110-volt HL-11 (MED 5001-1) 125/250 dual voltage

(2) TEMPORARY ADAPTER HL-2 (MED 5000-2)

(3) MALE CONNECTOR w/25 ft. POWER SUPPLY CABLE

HL-3 (MED 5000-3) 110-volt conn. w/cable

HL-13 (MED 5001-2) 125/250-volt conn. w/cable

(4) CABLE HATCH

(MED 5000-4A) Hatch for "50" assy. HL-14 (MED 5000-4B) Hatch for "100" assy.



MED MED MED MED MED 5004-1 5004 5004-2 5004-3 5004-4

Bridges the gap between the standard 50 ampere, 3 wire 125/250 LIFE-LINE Park Receptacle-and the smaller capacity 2 and 3 wire appliance connectors used on older or small travel-type mobilehomes.

LIFE-LINE Step-Down Converter-Adapters

HL-20 (MED 5004) HL-21 (MED 5004-1)

(MED 5004-2) HL-22 (MED 5004-3)

HL-24 (MED 5004-4)

MALE 4-WAY ADAPTER (Same as HL-20, except 4-way)

HL-25 (MED 5005)

#### **LIFE-LINE Extension Cables**



These extensions are constructed of the same high quality material as the LIFE-LINE cable. Be sure to use only LIFE-LINE extensions with the LIFE-LINE assemblies to insure the best in electrical service entrance equip-

LIFE-LINE Extension Cables

HL-30 (MED 5002-15) 15 ft. 110v

HL-31 (MED 5002-25) 25 ft. 110v HL-32 (MED 5002-50) 50 ft. 110v

HL-35 (MED 5003-15) 15 ft. 125/250v

HL-36 (MED 5003-25) 25 ft. 125/250v

HL-37 (MED 5003-50) 50 ft. 125/250v



#### 250-ft. Coils Flexible All Rubber Cable

Portable, durable, low priced, "S" type.

X-15 10-gauge, 2-conductor, .550 OD Wt. 60 lbs.

12-gauge, 2-conductor, .450 OD X-22 Wt. 50 lbs.

X-42 14-gauge, 2-conductor, .500 OD Wt. 40 lbs.

INSULATED CORD

14-gauge, single conductor

G-55 Per foot

G-56 100-ft. spool

RUBBER CABLE

14-gauge, 4-conductor

G-64 Per foot

G-65 100-ft, spool

RUBBER CABLE

14-gauge, 6-conductor

G-68 Per foot

G-69 100-ft. spool

10-GAUGE, 2-CONDUCTOR

X-10 Per foot

X-11 Extension cord, 100 ft. Wt. 17 lbs. X-12 Extension cord, 50 ft. Wt. 9 lbs.

X-13 Extension cord, 25 ft.

X-14 Extension cord, 40 ft.

8-GAUGE, 3-CONDUCTOR

BP-1 Per foot

12-GAUGE, 2-CONDUCTOR

X-20 Per foot

X-21 Extension cord, 100 ft.

X-24 Extension cord, 40 ft.

Wt. 15 lbs. Wt. 6 lbs.

Wt. 5 lbs.

Wt. 7 lbs.



Rubber pull-grip male attachment plug, free end cut flush.

14-GAUGE, 2-CONDUCTOR

X-40 Per foot

X-41 Extension cord, 100 ft.

Wt. 15 lbs. X-44 Extension cord, 40 ft. Wt. 6 lbs.

16-GAUGE, 2-CONDUCTOR

X-60 Per foot

X-61 Extension cord, 100 ft.


Wt. 10 lbs.

Extension cord, 50 ft. Wt. 5 lbs.

Leslie's THE SOUTH'S FIRST and FINEST



## ADHESIVES, COATINGS & SEALERS



## 3M SEALER EC - 1202

Tape Sealer, Reinforced with Fabric

1/16" thick x 100 ft. rolls

ROLL ROLLS 3/4 11

Width PER CTN. 12 9

EC-1202 is a synthetic rubber tape-form sealer, reinforced with fabric. Forms a watertight, gasket-like seal around window and door frames, along rain gutters, and where side and roof panels are screwed or riveted to structural members. Can also be used as an anti-squeak buffer between metal sections in automobiles and trucks, and for sealing overlapped seams on reinforced polyester fiber glass corrugated panels; is also adaptable for many other uses.

Cloth reinforcement gives this sealer-ribbon enough strength so that it does not stretch or sag when pulled during application; holds its shape and maintains the seal.

EC-1202 has sufficient adhesion to stay in place where it is applied, even in vertical or overhead positions. If improperly placed, it can be removed and replaced in the desired

EC-1202 offers several advantages over mastic-type sealers. It contains no solvent. Toxicity, fire hazard and shrinkage problems are minimized. It is easily applied. Since it is supplied in handy rolls of desired width, there is no need for specal flow or pressure equipment.

After more than 1400 hours exposure in an accelerated weathering test machine, a 1/16" thick film showed no loss of adhesion to aluminum, and retained its resiliency and flexibility with but slight alligatoring of the ribbon surface. No corrosion or staining of the metal was evident under the EC-1202 film. EC-1202 is not resistant to oil, gasoline or similar solvents.

3M SEALER EC - 1279



1/4" thick x 30" lengths (216 lengths per carton).



Non ravelling, high insulation qualities, free from pin holes, long life because impregnated with plenty of live rubber.

G-81 34" friction tape, 60 ft. roll

EC-1279 is a permanently soft, putty-like "thumbing" compound for filling wide seams, gaps and holes against dust, drafts and moisture; also provides a gasket-like seal between tightly-held faying surfaces.

EC-1279 is readily adapted to production line techniques. There is no need for special flow or pressure equipment. It is extruded in the desired bead size. Uniform beads are quickly laid with no waste of material.

EC-1279 is easy to handle; not sticky or messy in production handling, yet adheres well to steel, aluminum, glass and many other non-porous surfaces; stays permanently soft and pliable; has excellent resistance to water and atmospheric conditions; not intended for use on exposed seams of building panels without use of special overcoating which prevent soiling.



### SCOTCH MASKING TAPE



## These Features Assure Top **Masking Performance**

- 1. INSTANT ADHESION
- 2. SECURE HOLDING
- 3. MOISTURE RESISTANCE
- 4. FLEXIBLE & CONFORMABLE
- 5. THIN
- 6. EASY, CLEAN REMOVAL
- 7. PROPER STRENGTH

MM-40 3/4" masking tape, 60 yd. roll (48 rolls to carton)

## **SCOTCH No. 33 Electrical Tape**



66 ft. x 34 in. "ECONOMY" ROLL Packed in an individual metal can MM50 3/4" elec. tape, 20 ft. roll MM-51 3/4" elec. tape, 66 ft. roll STRETCHY - conforms to irregular surfaces. THINNESS - only 7 mils thick.

HIGH DIELECTRIC STRENGTH - 10,000 volts.

TOUGH - plastic backing is abrasion resistant, unaffected by water, oil, alkalies, alcohols, and

mosi acias.	PACKING		
"SCOTCH" No. 33 ELECTRICAL TAPE	Per Can	Per Carton	
¾ in. x 66 ft	1	12	
<sup>3</sup> / <sub>4</sub> in. x 20 ft	12 Rolls per tube	144	



## New Humphrey BOTTLE GAS LAMP for MOBILE HOMES

## Made to Resist the Shocks and Bumps of Traveling



This new Humphrey GAS LAMP solves the problem of lighting for the mobile home owner who wants to travel beyond the power poles. No electrical connection needed—uses the same Bottle Gas employed for cooking and heating. A handsome fixture with many new features for mobile home use. Exclusive new shock-resistant "Beret" mantle assures long service life and minimizes breakage while traveling. New halffrosted globe gives more light and allows in-spection of mantle. Beautifully finished in spar-kling chrome. Lamp gives soft, white, natural light equal to a 50-watt electric bulb.

HT-3 Model 3-T LP gas lamp HT-4 Half frosted globe



The No. 10 Beret soft tie on mantle will shrink to size of the standard pre-formed. It is recommended for all trailer car and other locations subject to jar and vibration. Put up three to an

HT-10 No. 10 Beret mantle

#### Fittings to Be Used with Gas Lamp

(see page 39 for illustrations)

Three-way tee 3/8" o.d. x 3/8" f.p.t. 5-30

5-40 Flared cap nut 3/8" o.d.

Flared tube nut 3/8" o.d. S-51

Male conn. 1/4" o.d. x 1/8" m.p.t. S-135

Male conn. 3/8" o.d. x 1/8" m.p.t.



Our new Trailer Car burner nose is a combination of two parts in satisfactory use for many years in our Opalite Lamps. The No. 8 Mantle ring is heat proof cemented to the porcelain burner nose and Beret mantle tied in the groove of mantle ring. It may be substituted for the regular burner nose when soft mantles are pre-

HT-7 No. 3-T Burner Nose.



The standard Humphrey No. 8 pre-formed Mantle will continue to be preferred in most fixed locations where long life is the rule. HT-8 No. 8 pre-formed mantle

## LIEB industries





Chrome ceiling light with switch and shade.

H-116 Fixture with shade, 8" opening H-144 Glass shade only for 8" fixture H-117 Fixture with shade, 6" opening


H-153 Glass shade only for 6" fixture H-120 Fixture with shade, 4" opening H-154 Glass shade only for 4" fixture Weight on complete unit 2½ lbs.

Weight on glass shade 1/2 lbs.

Chrome bathroom light with convenience outlet, wall mount.

H-119 Fixture with shade. Wt. 2½ lbs. H-145 Glass shade only. Wt. 1½ lbs.

HL-135 Socket and switch assy. for bathroom







The distinctive charm of this fixture adds to beauty of any mobile home. Ebony back-plate.


H-180 Ebony grill over white shade. Brass colored grill over red shade. Swivel-type Wall Fixtures Single Bullet-Shades in Fibre Choice of 3 color combinations

H-171 Solid ebony cup and shade. Ebony back-plate. M-173 Brass-color cup, white shade, ebony back-plate. M-175 Solid green cup and shade, ebony back-plate. H-177 Brass-color grill cup, whiteshade, ebony back-plate.

Chrome wall fixture with attractive glass shade.

H-160 Fixture Complete Wt. 3 lbs.

H-161 Glass shade only.





Chrome circline fluorescent fixture, pull switch, with bulb. 2 sizes.


M-126 9-in, fixture. Wt. 5 lbs.

H-127 13-in. fixture. Wt. 5 lbs.

13-in. bulb. 32 watt. H-155

9-in. bulb. 22 watt. H-148


Starter. HL-130 Pull chain and switch




Frosted glass shade for soft downward light. Upper shade of perforated metal with black matte finish. Crystal pull knob. Enclosed reel allows adjustment from 18" to 48" from ceiling. H-185 Fixture Complete Wt. 3 lbs.

H-186 Glass shade for pull-down fixture









Snap-on Belt Moulding Polished Stainless Steel 12' length.

Z-21 3/4" moulding and filler Z-24 End clip 11/8" moulding

and filler

Z-25 End clip

**Snap-on Belt Mouldings** Corrugated Stainless Steel 12' length.

**Z-32** 3/4" moulding and filler I" moulding Z-34 and filler


Snap-in Belt Moulding Baked prime finish. 16' length.

3/4" moulding 11/8" moulding Z-2

Z-7 Filler Z-18 End Clip Z-19 End Clip Nail-on Belt Moulding

Baked prime finish. 12' length. 4" hole spacing.

Z-26 Inch moulding Z-29 End clip Z-27 End clip Z-30 11/2" moulding Z-28 11/8" moulding Z-31 End clip



L-Shaped Aluminum Moulding 125 gauge aluminum. 12' length.

Z-38 15/16" moulding

Skid Moulding—Steel Baked prime finish. 16' length.

Z-11 2-1/32" moulding


Drip Moulding, Aluminum 12-foot length.


Z-15 3/4" moulding Z-16 Red leather filler



**Aluminum Roof Edging** 125 gauge aluminum. 13' length.

Z-40 1-1/16" x 5/8"



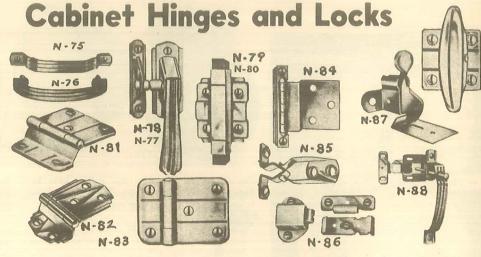

K-81 Oval, flush pull, 13/8" or larger doors; 41/8" x 2" x 1/2" deep; chrome finish.

K-83 Flush cup for cabinet doors; o.d. I" x 1/4" deep; bright nickel finish.

K-84 Flush cup for cabinet and wardrobe doors;; o.d. 1-15/16" x 5/16" deep;

K-85 Flush pull for cabinet and wardrobe doors; 21/8" x 11/4" x 7/16" deep: brass.

K-86 KENNAPULL used with closed pocket installation: provides means of retracting door from wall pocket; 21/4" x 1-1/16" x 7/16" deep; chrome finish..

Wt. 4 oz, on all K catches

N-75 Brass drawer pull-overall length 4-1/16"

N-76 Brass drawer pull—overall length 4-1/16" N-77 Steel reversible catch, for left or right hand door, FLUSH

N-78 Steel reversible catch, for left or right hand door, 3%" OFFSET
N-79 Steel reversible cupboard catch, with Duralin tips, FLUSH
N-80 Steel reversible cupboard catch, with Duralin tips, 3%" OFFSET
N-81 Steel cabinet hinge, 3%" OFFSET
N-82 Steel cabinet hinge, 3%" OFFSET
N-83 Steel cabinet hinge, 3%" OFFSET

N-83 Steel cabinet hinge, FLUSH

Wt. 3 oz. on all N catches

N-84 Steel hinge for doors 3/4" thick (allows door to open 180°) semi-concealed, 3/8" OFFSET

N-90 N-91 N-92

N-85 Steel spring friction catch

N-86 Steel concealed friction catch (with both slides)

N-87 Steel elbow catch
N-88 Steel reversible cupboard catch — for right or left-hand door


N-90 Chrome Rocker cupboard catch-FLUSH N-91 Chrome Rocker cupboard catch - 1/4" OFFSET

N-92 Chrome Rocker cupboard catch - 3/8" OFFSET

Leslie's

### **DECKER DOOR LOCKS**

#### 1040-B FLUSH TYPE DOOR LOCK



Outside view

When not in use the highly polished outside handle remains flush in its chrome plated well. Yet, the touch of a finger provides the means for operating the exclusive "rolling bolt" that assures easy closure and eliminates door slamming. Handle may be locked by sliding latch pin and closing door or with key. The unit can be unlocked from the outside with key. Has night latch feature, yet a turn of inside handle releases latch. Except when matching lock cylinders are desired, locks need not be ordered in pairs. Works on right or left hand doors.

D-30 Decker lock No. 1040-B for door 11/2"

D-31 Decker lock No. 1040-B for door 13/4" thick

Decker lock No. 1040-B for door 2" thick

#### REPLACEMENT PARTS

Lock cylinder w/2 keys D-36

Inner handle only D-37 Outside handle only

D-38 Pull-back bar

D-39 Inside cam and stud

Keys, each Handle pin D-40 D-41


D-42 Spring for bolt

D-43 Springs, right and left-per pair

D-44 Connecting screws D-45 Inside half of lock

D-46 Outside half of lock

#### (SPECIFY DOOR THICKNESS)



## LOCK ASSEMBLIES LOCKING HANDLE

Locking case with outside locking handle and inside handle. Has automatic "kick-off." Easy to install—fits flush on inside of door. Overall dimensions—43/8" wide x 41/8" high.

Complete lock assembly. Wt. 3 lbs. Locking case only. Wt. 11/4 lbs. Inside handle only. Wt. 1/2 lb. V-14 V-15

V-16



#### Screen Door Latch

Gentle push or pull opens door—checks slam— prevents rebound—keeps door closed. Simple to install. Only a screwdriver is needed. Also suitable for cabinets. Individually packed with screws for mounting.

F-1 Wt. 6 oz.

#### 1040-DK DOOR KNOB ASSEMBLY



Only one of its kind on the market at this price. Design of lock bolf eliminates slamming of door. Lock in door knob for easy access. Fits right or left doors. Eye-appealing chrome finish. Easy to install-two units to fasten with screws.

Decker 1040DK for door 1½" thick Decker 1040DK for door 1¾" thick D-49 Decker 1040DK for door 2" thick D-50

(X-1) Outside knob D-52


D-53 Outside knob washer

(X-10) Outside knob snap-ring D-54

D-55 Outside knob lock cylinder D-56 Outside knob esc. plate

(X-9) Outside knob gasket D-57

#### 606 JALOUSIE DOOR LOCK



Absolutely new-exclusively for mobile home jalousie doors.

Deadbolt latch assembly-can't come open in transit.

Panic escape feature on inside knob. Universal to fit 11/4" to 13/4" thick doors, metal or wood.

Lock bolt extends full 1/2". Back set 21/2" for jalousie door, standard door 5".


Chrome plated knobs and escutcheons. Locking bolt and interior parts cold rolled steel,

heavy plated. For left and right hand doors.

Lock cylinder in center of recessed knob.

Solid I" shaft from outside knob to inside knob.

#### D-60 Decker Jalousie door lock No. 606




555 Decker Lock For inside doors.

No accidental lockout; finger tip control locking; easy installation; adjustable and reversible Wt. 11/2 lbs. striker.

D-70 Aluminum door lock D-72 Brass door lock

### sliding door hardware



Now I packaged set for 3/4" and 13/8" doors; same track, hangers and guide. For 3/4" door installations use 3/8" offset hangers on front door and 1/16" offset hangers on back door. For 136" door installations simply reverse hangers which are clearly identified by stamp on back. New extruded heat treated aluminum track is sturdy and rust proof. Designed for jump-proof smooth performance. Sets include track, hangers, screws and door guide sets.


Our No. K-50 (2050) -with 48" track

Hanger #2038, 1/16" K-51

Hanger #2039, 3/8 K-52

Double nylon guide #1204 Nylon wheel #3013 K-53

K-54



SINGLE DOOR TRACK ASSEMBLIES complete

with 48" track, hangers #2038 or #2039, nylon guide, guide screws, nylon wheel #3013.

K-88

(#28) for doors up to 13/8" (#29) for doors 13/8" and heavier K-89

(#1203) single nylon guide K-90

### Kennalock for **Sliding Doors**



Modern design, simple to install Kennalock. For sliding doors. Automatic guide and latch helps assure perfect alignment. Recessed finger pull. Size 34" x 1" x 11/8".

K-94 Brass. Wt. 1/2 lb. K-95 Chrome. Wt. 1/2 lb.

"RUBBER ROLLER"



It's quiet - as it rolls and retracts to open or close. Cushioned by coiled spring action, the rubber roller glides smoothly over the strike and eases the door to a snug, silent stop.


BG-1 "Rubber Roller" spring catch—small

"Rubber Roller" spring catch-small "Rubber Roller" spring catch-large

## **BARGMAN'S** VERTI-Lock

With 21/4" x 91/2" interior and exterior face plates which mount vertically . . . fits every style door. Designed with graceful simplicity inside and out, engineered for smooth, continuous performance, safety and security inside and out. Whether locked with key or interior locking lever, latch bolt is dead-locked into strike opening, and door is always securely locked from outside. Interior mechanism reversible to convert one hand of lock to opposite hand if required.

BP-275 (L-77) Jalousie door lock



NO. 22 PORCH LIGHT ASSIST BAR . . designed to match L-66 Lock.


#### "Hardware Harmony" by Bargman

NO. 22 PORCH LIGHT ASSIST BAR

Be Modern . . . Harmonize your Hardware with matched Door Locks and Assist Bars . . . attractive . . .yet practical additions to your front and rear doors.


BP-22 Assist bar and porch light

BP-23 Assist bar only











B-30 Shade only.

### **Smaller Wall Brackets**

Metal. May be used with or without clip-on shades. With convenience outlet.

B-4 Brown

B-5 Chrome

Plastic half shade

#### **Bakelite Bottom Turn Socket** For replacement in practically all light fixtures.


B-40 Wt. 3 oz. B-12 Switch Knob only



**Chrome Cabinet Light** 

All metal fixture for bright illumination over sink. Easily installed on underside of cupboard. Rotary switch and lead wires attached. Wt. 1 lb.

B-93 Complete.
B-94 Plus convenience outlet.




000

0

Bolt pocket permits full extension of bolt in door jamb . . . an essential feature for proper operation . . . of any door.

BP-280 (SP-77) Strike with bolt pocket



Bell-shaped Metal Porch Lite Chrome finish, Easily mounted, B-7 Screw-lamp

retained by spring tension. Wt. 11/4 lbs.

B-49 Porch Lite

#### Porch Lite with Glass Lens

Available with white or yellow bug-repellent lens. Streamlined design combining glass and chromeplated metal. Uses standard B-7 lamp. Wt. 11/2 lbs.

B-6 With white lens

B-11 With yellow lens B-8

White lens only B-9 Yellow lens only

B-10 Metal cover

B-7 Bulb for both lites


**Vapor-Proof Shower Lamp** 

Completely insulated against moisture. Wire leads sealed to terminals on porcelain base. Mounting screws furnished.

B-95 Complete. Wt. 11/2 lbs.

BP-32 Glass shade. Wt. 1/2 lb.

BP-33 Porcelain base



Bargman 111 DH Door Stop

Heavy duty easy-action spring cushions stop

without shock . . . door remains open at right

angle. Simple, inexpensive installation. Two styles

of bracket are available. Either style may be

BP-111 Door Stop with right angle bracket

BP-112 Door Stop with Z bracket which mounts

which mounts on inside flat surface of

used with right or left hand doors.

over top of door.

**Brightspot Auxiliary** 

6-8-12 volt fixture operates on automobile or hot shot dry cells battery. Complete with 21 candlepower lamp and rotary switch. Wt. 1 lb.

B-26 Chrome Brightspot with 12-volt bulb

B-27 Artone Brightspot with 12-volt bulb

B-31 Artone Brightspot with 6-volt bulb B-39 Chrome Brightspot with 6-volt bulb

B-35 Brightspot lens only

Robot-Light 110 Volt

Light your dark closets automatically. Porcelain socket with push-button switch that operates with opening and closing of door. Complete with 5 ft. rubber-covered extension cord.

B-38 Without lamp. Wt. 1 lb.

#### Chrome-Plate Assist-Bar-Light

Combination assist-bar and porch light uniting 2 trailer necessities. Wt. 11/4 lbs.

B-97 Bar & Light

B-98 Bar with 110 volt outlet


B-99 Assist Bar only

BP-197 Lens for assist bar light



# Bargman

All Locks Can Be Keyed Alike in Pairs



Standard with leading trailercoach makers—has outside steel door handle, inside metal handle, rust-proof steel lock case, Yale cylinder, keys, guard plate for lock cylinder, Made of heavy gauge rust-proof steel. Wt. 21/2 lbs.

B-45 (L-51) Left hand lock B-46 (L-50) Right hand lock REPLACEMENT PARTS


B-41 (C-9) Locking cylinder w/2 keys and cylinder plate

B-42 (H-7) Outside handle only (R-10) Inside handle only B-43


(H-85) Outside locking handle w/2 keys B-44 Inside left hand lock case only for L-51

and L-55 locks Inside right hand lock case only for L-50 and L-54 locks

B-50 Lock case spring



## **Door Lock Assemblies**



#### HAND-L-LOCK

Single-unit lock, retains all working parts between cast metal, chrome-plated interior and exterior face plates. The few working parts are. solid brass-forged bolt; brass pin-tumbler cylinder; steel deadlocking lever; cast-metal cam; assuring long, faultless service. The Inside Panic Bolt Release Handle offers the safety of quick exit from the coach. (One model fits both right and left hand doors.) Simple to install.

B-306 (L-66) Wt. 31/2 lbs.
B-307 (L-66 w/bolt trap strike) Wt. 4 lbs.

REPLACEMENT PARTS

B-310 (L-66-2) Out side handle B-311 (BPL-66-2) Inside handle B-312 (L-66-6) Latch bolt B-313 (L-66-3) Locking lever

B-314


(L-66-15) Guide plate (BPL-66-1) Inside plate B-315 B-316 L-66-1) Outside plate


B-317 L-66-14) Cylinder w/2 keys. 8-318 BPL-66-71 Inside safety latch


B-319

(L-66-9) Cam (L-66-8) Handle spring B-320 (L-66-10) Latch bolt spring B-321

B-322 Screws for L-66-15 guide plate









#### Catch-Bumper Assembly

Designed to catch the formed edge of door; eliminating the necessity of using holding devices on the door itself. Metal parts are cadmium plated. Attached bumper of prime quality rubber prevents the trailer door from striking body.

B-205 (C-14-L)

Wt. 4 oz.

#### Catch-Latch Assembly

Of durable cadmium plated steel to withstand elements. Spring catch hinged on back plate and latch plate with loop for catch. Has holes for screws. Holds trailer doors to walls, preventing door accidents.

B-64 (C-18)

Wt. 4 oz.

#### Rubber Door Bumper

Made of quality rubber has counter-sunk screw, suitable for mounting on metal, wood, or synthetic wall-board. Offers insurance to trailer beauty by preventing doors from colliding against walls.

B-03 (B-23)

Wt. 2 oz.

#### **Door Bumper and Holder**

Combination outside door bumper — exterior handle holder. Has solid rubber tip, protects both door and trailer body from damage. Guard holds trailer door open, flat against wall. To be mounted with door handle holder pointing downward. Easy three-screw installation.

B-34 (B-17)

Wt. 4 oz.

#### **Bargman Service Kits**

KIT No. 2-for L-66 Hand-L-Lock only. Consists of I outside plate, I outside handle, 3 latch bolts, I handle spring, I cam, I latch bolt spring, 2 cylinders with 2 sets of keys, I guide plate with screws, I inside plate, I inside handle, I inside safety latch and 1 strike. Wt.

Our B-58

4 lbs.

Wt. 4 lbs.

not afford to be without!


KIT No. 3—for all other Bargman Locks Consists of 4 cylinders with screws, 4 inside handles with screws, I outside handle less shank, 4 lock case springs, and I outside handle spring.

For service when you need it! All parts wrapped

separately and easily identified. Kits you can-

Our B-59

Wt. 21/2 lbs.



Ultimate in trailer door locks, surpasses anything in trailer door hardware. Beautiful, ruggedly built for lasting service. Assembly includes streamlined locking handle, inside panic bolt handle, escutcheon plate (chrome plated) Hurd lock cylinder, keys, rust-proof lock case. Wt. 3 lbs.

B-51 (L-54) Right hand lock complete B-52 (L-55) Left hand lock complete

REPLACEMENT PARTS

Inside left hand lock case only for L-55 8-47

and L-51 locks Inside right hand lock case only for L-54 and L-50 locks

B-53 (H-20) Outside handle assy.
B-54 (C-10) Cylinder w/2 keys
B-55 (H-20-2) Outside handle—casting only
B-56 (H-20-2) Outside handle—with shank



### SP-66 ADJUSTABLE

#### STEEL STRIKE

Available in two bolstered lip dimensions: SP-66-B with 3/8" lip; SP-66-C with 1/2" lip. Easily adjustable for perfect alignment between lock bolt and strike plate.


BP-66 (SP-66) Adjustable steel strike



#### 5-60 "BOLT TRAP" DOOR STRIKE

An important complement to the L-66 Hand-L-Lock, the S-60 Door Strike has a "bolt trap" in a rugged cast metal plate 1/8" thick. It is provided with countersunk screw holes to stabilize its installation.

Our No. B-37 Wt. 4 oz.



#### S-20 "ONE-STEP" DOOR STRIKE

Made of durable cast metal; incorporating counter-sunk screw holes for neat-fitting stable attachment; the S-20 is a single-stage door strike furnished specifically for doors 1" to  $1\frac{1}{2}$ " thick.

Our No. B-32 Wt. 3 oz.



#### S-19 "TWO-STEP" DOOR STRIKE

The S-19 is designed for doors of 11/2" thickness or over. Made of cast metal, this twostage door strike assures rugged service in keeping with Bargman Door Lock and Handle Assemblies.

Our No. B-33

Wt. 3 oz.

Leslie's

THE SOUTH'S FIRST and



## Travel-Awn the luxurious ROYAL



Special Hercu-Plastic eave

#### **ROYAL Travel-Awn**

	10-		
	Size	Our No.	Size
Our No.	7' x 22'	UR-920	9' x 20'
UR-722	7' x 24'	UR-922	9' x 22'
UR-724	7' x 26'	UR-924	9' x 24'
UR-726	7' x 28'	UR-926	9' x 26'
UR-728	7' x 30'	UR-928	9' x 28'
UR-730	7' x 32'	UR-930	9' x 30'
UR-732	7' x 34'	UR-932	9' x 32'
UR-734	7' x 36'	UR-934	9' x 34'
UR-736	7' x 38'	UR-936	9' x 36'
UR-738	7' x 40'	UR-938	9' x 38'
UR-740	8' x 10'	UR-940	9' x 40'
UR-810	0 "	UR-942	9' x 42'
UR-812	0 "	UR-944	9' x 44'
UR-814	0 "	UR-1010	10' x 10'
UR-816	0 "	UR-1012	10' x 12'
UR-818		UR-1014	10' x 14'
UR-820		UR-1014	10' x 16'
UR-822	0 "	UR-1018	10' x 18'
UR-824	0 11	UR-1018	10' x 20'
UR-826	0	UR-1022	10' x 22'
UR-828	8' x 28'	UR-1024	
UR-830	8' x 30'	UR-1026	
UR-832	8' x 32'	UR-1028	10' x 26'
UR-834	8' x 34'	and the same of th	
UR-836	8' x 36'	UR-1030	
UR-838	8' x 38'	UR-1032	
UR-840	8' x 40'	UR-1034	
UR-910	9' x 10'	UR-1036	
UR-912	9' x 12'	UR-1038	10' x 38'
UR-914	9' x 14'	UR-1040	10' x 40'
UR-916	9' x 16'	UR-1042	10' x 42'
UR-918	9' x 18'	UR-1044	10' x 44'
OK-A10			



#### Sloping Side Panels

Add rich finishing touch at a small extra cost.

(Milling	
7 feet	
Q fact	
9 teet	
In feet	
10 1001	
	7 feet 8 feet 9 feet 10 feet



Hinge rails are made in four styles to fit most any make trailer when mounted in straight line and parallel to the floor. Be sure to include type wanted and height of

#### **MOBILE Travel-Awn**

Length	5 to 6	6 to 7	over
in ft.	feet	feet	7 ft.
8	UM-508	UM-608	UM-708
10	UM-510	UM-610	UM-710
12	UM-512	UM-612	UM-712
14	UM-514	UM-614	UM-714
16	UM-516	UM-616	UM-716
18	UM-518	UM-618	UM-718
20	UM-520	UM-620	UM-720
22	UM-522	UM-622	UM-722
24	UM-524	UM-624	UM-724
26	UM-526	UM-626	UM-726
28	UM-528	UM-628	UM-728
30	UM-530	UM-630	UM-730
	UM-532	UM-632	UM-732
32		UM-634	UM-734
34	UM-534	and the second second second second	UM-736
36	UM-536	UM-636	OM-730

#### ALL ORDERS SHIPPED FROM GALION, OHIO PRICES FOB GALION, OHIO

Listed hereunder are a few representative ship-

ping we	eights of these	awnings.	
7' x 20'	Wt. 147 lbs.	9' x 22'	Wt. 220 lbs.
7' x 30'	Wt. 217 lbs.	9' x 30'	Wt. 278 lbs.
	Wt. 178 lbs.	9' x 34'	Wt. 299 lbs.
8' x 30'	Wt. 230 lbs.	9' x 40'	Wt. 325 lbs.
	Wt. 250 lbs.	10' x 30'	Wt. 295 lbs.
8' x 40'	Wt. 310 lbs.	10' x 40'	Wt. 347 lbs.

#### **Price Quotations Gladly Submitted** for Awning Sizes Not Listed



### **Auger-Type Ground Anchors**

Will support poles securely where concrete or wooden floors are not used.

U-702 Wt. 3 lbs.

## Aluminum Awnings

"Lifetime" Aluminum means:

Beautiful
 Lightweight
 Cool

No Upkeep
 No Sagging
 No Flapping
 Fire Proof
 Mold Proof
 Vermin Proof

Travel-Awn sturdy, tubular construction. Weather-proof without caulking. Panels are 12 inches wide easily carried in trailer when moving. Comes to you complete to the last bolt. With adjustable poles and floor flanges. Designed to fit almost any trailer having regular canvas-type awning rail. The entire unit is pre-assembled at plant. All panels are numbered and marked and slide and snap together in a simple manner with minimum of bolts.

Awning can also be installed direct to trailers without the need of a canvas type awning rail, but indication must be given when order is placed. The "Neoprene" will then be left out of the eave attachment and sheet metal screws will be furnished for screwing the eave attach-ment directly to the trailer. Please indicate if direct mounting will be made on TOP or on SIDE of trailer or on COACH TYPE.

Manufacturing conditions are such that the assembled awning may measure up to two inches longer or shorter than the size ordered; manufacturer also reserves the right to make minor design changes and improvements without notice whenever the change is considered for the betterment of the product.

#### TRAVEL-AWN Aluminum WINDOW AWNINGS

Length in inches	24" wide pro-	30" wide pro-
along trailer	jection out	jection out
18"	U-1824	U-1830
24"	U-2424	U-2430
30"	U-3024	U-3030
36"	U-3624	U-3630
42"	U-4224	U-4230
48"	U-4824	U-4830
54"	U-5424	U-5430
60"	U-6024	U-6030
66"	U-6624	U-6630
72"	U-7224	U-7230
78"	U-7824	U-7830
84"	U-8424	U-8430
90"	U-9024	U-9030
96"	U-9624	U-9630
102"	U-10224	U-10230
108"	U-10824	U-10830
114"	U-11424	U-11430
120"	U-12024	U-12030
126"	U-12624	U-12630
132"	U-13224	U-13230
138"	U-13824	U-13830
144"	U-14424	U-14430
150"	U-15024	U-15030
156"	U-15624	U-15630


HOW TO MEASURE-If a window is 29" wide (Horizontally) between frame edges, a 30" length awning will fit, but a 36" long awning will give better protection and appearance. Therefore allow at least one inch extra or more beyond window frame on each side.

HOW TO ORDER-If window is more than 48" wide, please indicate if divided in two, three or more sections. Standard attachment includes eve rail installed in place of, or above, drip mold by means of sheet metal screws furnished. If canvas track rail is already on trailer show
"TO FIT CANVAS AWNING RAIL."

Leslie's

## Vivatex Treated Duck Awnings for Mobile Homes

#### **ACCESSORIES for AWNINGS**



#### **Aluminum Awning Rails**

	Lengt
BA-10	10-ft.
BA-12	12-ft.
BA-14	14-ft.
BA-16	16-ft.
BA-18	18-ft
BA-20	20-ft

SCREWS for awning rails.

Use 3 screws to the foot.

BA-41 per dozen

BA-64 per gross

POLES. Wt. 41/2 lbs.
BA-26 "Arabian" spear-head steel pole. BA-30 7-ft. adjustable standard steel pole.

BA-34 Galvanized Steel Guy Line

GUY-ROPES. Mildew-resistant with metal adjustable slides.

BA-28 Single. Wt. 1/2 lb. BA-29 Double. Wt. 1/2 lb.

GUY-ROPE SLIDES. Galvanized.

BA-32 Wt. 1/4 lb.

GUY-ROPE SPRINGS. For keeping guy-ropes taut.

BA-33 Wt, lb.
STAKE. 20" angle-iron.
BA-27 Wt. lb.
DUCK. Untreated. No. 12. Wt. 11.45 per sq. yd. BA-24 10-ft. wide.

BA-25 9-ft. wide. PRESERVO. Waterproofs canvas, leaving it soft


and plianble. BA-50 Gal. Wt. 71/2 lbs.

BA-51 Qt. Wt. 11/4 lbs.
EVERSEAL. Sealing Strip used between awning moulding and body of trailer to prevent leaks. 1-inch wide.

BA-40 BA-62

per foot 100-ft, roll

#### **AWNING LIFT**




Awning Lift to eliminate your Awning tears. Installed in upper corner of outer door.

F-5

#### **Price Quotations Gladly Submitted** for Window Awnings

Please give exact size of window (outside dimensions—height and width). Specify type of windows—whether hinged top or side, or picture group with casement windows.



#### **Deluxe Canvas Awnings**

10-oz. Duck. Mildew-resistant and water-repellent. Made with 12" scalloped valances on sides and front. Complete with adjustable front bar, full-length adjustable poles, guy-ropes with slides and guy-rope springs, and 20" stakes. The front bar allows you to "style" your awning front to suit your needs.

BA-810	8' x 10'	BA-936	9' x 36'
BA-812	8' x 12'	BA-938	9' x 38'
BA-814	8' x 14'	BA-940	9' x 40'
BA-816	8' x 16'	BA-1012	10' x 12'
BA-818	8' x 18'	BA-1014	10' x 14'
BA-820	8' x 20'	BA-1016	10' x 16'
BA-912	9' x 12'	BA-1018	10' x 18'
BA-914	9' x 14'	BA-1020	10' x 20'
BA-916	9' x 16'	BA-1022	10' x 22'
BA-918	9' x 18'	BA-1024	10' x 24'
BA-920	9' x 20'	BA-1026	10' x 26'
BA-922	9' x 22'	BA-1028	10' x 28'
BA-924	9' x 24'	BA-1030	10' x 30'
BA-926	9' x 26'	BA-1032	10' x 32'
BA-928	9' x 28'	BA-1034	10' x 34'
BA-930	9' x 30'	BA-1036	10' x 36'
BA-932	9' x 32'	BA-1038	10' x 38'
BA-934	9' x 34'	BA-1040	10' x 40'

#### **Price Quotations Gladly Submitted**

#### for Awning Sizes Not Listed

Membrane; a close weave asphalt impregnated cloth to be used in conjunction with SPECIAL ADHESIVE.

E-130 6" wide by 150' long. Per roll

E-131 Cut to order (6"). Per foot

E-132 12" wide by 150' long. Per roll

E-133 Cut to order (12"). Per foot


Special Adhesive, a black liquid bonding cement for patching roofs. Very strong in adhesive qualities; used to hold membrane in place when patching a crack, loose or torn material, seams, or over nails in a roof that are working loose; applied with ordinary brush onto bad surface and the membrane is applied directly into it; work adhesive over edges of membrane as that is to be covered.

E-120 Pint. Wt. 2 lbs. E-121

Quart. Wt. 3 lbs. Gallon. Wt. 10 lbs. E-122

E-123 5 Gallons. Wt. 46 lbs.

10-oz. U. S. Army Duck Vivatex treated to resist weather Painted in a choice of 20 solid colors and patterns. Color Swatch Samples gladly furnished



#### Self-Supporting Canvas Awnings

No guy-ropes or stakes needed, and gives you more room on lawn. The adjustable top rafter supports are made with spring tension to hold awnings out from trailer. Complete with lightweight steel tubing frame, adjustable metal front bar, rafters, and "Arabian Spear-head" adjustable upright poles with positive screw locks. Poles fasten down with small steel pins (included), to prevent wind from lifting bottom ends off ground. 10-oz. duck, mildew-resistant and water-repellent.

BS-810	8' x 10'	B5 932	9' x 32'
BS-812	8' x 12'	BS-934	9' x 34'
BS-814	8' x 14'	BS-936	9' x 36'
BS-816	8' x 16'	BS-938	9' x 38'
BS-818	8' x 18'	BS-940	9' x 40'
BS-820	8' x 20'	BS-1012	10' x 12'
BS-822	8' x 22'	BS-1014	10' x 14'
BS-824	8' x 24'	BS-1016	10' x 16'
BS-826	8' x 26'	BS-1018	10' x 18'
BS-828	8' x 28'	BS-1020	10' x 20'
BS-912	9' x 12'	BS-1022	10' x 22'
BS-914	9' x 14'	BS-1024	10' x 24'
BS-916	9' x 16'	BS-1026	10' x 26'
BS-918	9' x 18'	BS-1028	10' x 28'
BS-920	9' x 20'	BS-1030	10' x 30'
BS-922	9' x 22'	BS-1032	10' x 32'
BS-924	9' x 24'	BS-1034	10' x 34'
BS-926	9' x 26'	BS-1036	10' x 36'
BS-928	9' x 28'	BS-1038	10' x 38'
BS-930	9' x 30'	BS-1040	10' x 40'

"STORMY WEATHER" **Lasting Protection Against** WEATHER and MILDEW



The "dry" water repellent that does not stiffen canvas; easy to use; coverage averages 100 to 120 sq. ft. per gallon—varying according to condition of fabric; from 6% to 20% is added to the tensile strength of canvas thread when treated with "Stormy Weather."

SW-1 One-gallon can



## Accessories to Beautify THE MOBILE HOME




#### Leg-O-Matic Chairs fold like magic

Chair automatically triple folds when you press the spring underneath chair. Folded Size: Only 181/2 x 51/2 x 16". (Note that front and rear legs are folding into bottom of seat . . . Seat and

Back join together). Made of hard birch and maple, with a wheat finish. Plastic coverings in red, green, yellow, ivory, coral, and chartreuse.

L-1 Chair. Wt. 11 lbs. Arm Chair. Wt. 14 lbs.



#### No dismantling-

#### Clear-Beam TV Antennas

Featuring the Rhombat-an antenna designed for peak performance on all channels in any area. Receives picture signals up to 125 miles. Eliminates ghosting, snow and electrical disturbances. On permanent, simple installation-

raise for reception, lower for travel. The telescoping masts are Cadmium plated steel, selfsupporting without guy wires and when opened extends 7 feet over trailer roof.

CB-1 Antenna, telescoping mast, 25-ft. lead-in wire, clamps, mounting brackets, bolts, screws and detailed in-struction sheet. Wt. 10 lbs.





Unfinished


**Drop-Leaf** 

**Tables** 

Table tops are made from 1/2 inch 5 ply, matching grain birch plywood; end panels are 3 ply 1/4 inch birch plywood; legs are heavy sound wood. Tables are set up, very smoothly sanded, ready for finishing if you so desire. Two swinging legs. Constructed to afford rigid stability. Six well-anchored heavy hinges hold dropleafs. Top opens to 24" x 39". Folds to 13½" x 24" and is 30" high. The 3-drawer table has side panels covering the sliding drawers. Smooth pulling drawers are deep and long to give maximum storage.

No drawers. Wt. 24 lbs. P-40 P-41

1-drawer, Wt. 26 lbs. 3-drawer, Wt. 30 lbs



2-Step & Rail-

Our No. N-1 (2S) 2-step without rail. Wt. 10

Platform and Rail -

Our No. N-2 (2SR) 2-step with rail. Wt. 48 lbs.

Our No. N-3 (ISP) I-step platform. Wt. 50

Our No. N-4 (ISPR) I-step platform and rail.

Our No. N-5 (DISPR) Dbl. I-step platform and rail. Wt. 73 lbs.

Our No. N-6 (3S) 3-step only. Wt. 60 lbs.

Our No. N-7 (3SR) 3-step with rail. Wt. 70 lbs.

Our No. N-8 (2SP) 2-step platform. Wt. 78 lbs.

Our No. N-9 (2SPR) 2-step platform and rail. Wt. 90 lbs.

Our No. N-10 (D2SPR) Dbl. 2-step platform and rail. Wt. 115 lbs.

Metal


**Folding Chairs** 

**Padded Seats** 



Brown steel frame, wide seat padded with foam rubber, brown plastic upholstery; seat size 121/2" x 143/4".

F-10 Wt. 10 lbs.




## Art Craft Door Grilles

#### Adjustable in Width and Height

High grade steel, aluminum color, Made with pivot joints, expand in both directions, accordion fashion, to fit panels of varying sizes. When the width is greater than height, grill should be adjusted cross-wise.

AG-25 Wt. 5 lbs.




**Tempered Aluminum Door Grilles** Bright finish, light-weight, but sturdy grilles to protect your screen doors. Available in 2 sizes.

SG-1 Size 20 x 25" high. SG-2 Size 20 x 21" high. Wt. 11/2 lbs.



## For More Comfortable Living

**Venetian Blinds** 



#### Flexalite Aluminum Blinds

1 1/2" Slats

Flexalum aluminum slats; operated by worm-gear tiltor, and have decorative facia board heading.


	Size	Wt.
A-60	26 x 20	41/2 lbs.
A-61	32 x 20	5 lbs.
A-62	35 x 20	5 lbs.
A-63	42 x 20	51/4 lbs.
A-64	44 x 20	51/4 lbs.
A-65	48 ×20	51/2 lbs.
A-66	50 x 20	51/2 lbs.
A-67	60 x 20	61/2 lbs.
A-68	70 x 20	71/2 lbs.

#### **Venetian Blind Accessories**

A-90 Nylon cord, per yard A-93 Nylon cord, per 1,000 yd. spool Wt. 5 lbs.

A-95 Tape for 1½" slats, per yard
A-96 Tape for 1½" slats, per
72 yd. roll. Wt. 4 lbs.
A-98 Tape for 2" slats, per yard
A-99 Tape for 2" slats, per


72 yd. roll. Wt. 4 lbs.



#### **Metal Drapery Rods**

A sturdy metal rod made for trailer windows. Hardens when bent. Extends from the wall making it ideal for use with Venetian Blinds or roller shades. Weight 1/2 lb.

CC-12 27/8" extension, 61/2" arm. A-88 31/4" extension, 8" arm.



#### **Portable Metal Ironing Board and Cover**

All-metal ventilated board 12" x 36". Collapsible legs that lock firmly open or closed, wth rubber feet. Heavy quilted cotton pad, sanforized cover, plus plastic cover to keep board clean when not in use.

F-40 Wt. 8 lbs.



#### HANDSOME TWIN UNITS

MONITOR "55" WASHER with new AERA-TOR ACTION . . . holds up to 6 lbs. of clothes — capacity 9 gallons of water; washes and damp dries 10 lbs. in 10 minutes;

powerful electric wringer-jumbo size roll which damp dries all types of garments-safety foot pedal control which operates electric wringer swings under washer when not in use;

. . . single operation — single lever operates washer and electric pump.

EXCLUSIVE MONITOR PULSATOR WASH AC-TION sends water whirling through clothes for perfect washing.


NO REVOLVING DRUMS OR TURNING PAD-DLES to drag, strain or twist your clothes gives you cleaner, faster, whiter method of

NEW STREAMLINED STYLING has stainless steel washtub; white enamel cabinet; plastic top which provides ideal work surface; mounted on casters for easy roll-away; filler hose that will connect with most faucets; motor power \( \frac{1}{8} \) H.P.,

115 volts, AC only, 60 cycles, UL approved;

size 16" x 16" x 32" high; weighs 70 lbs.

ME-1 Monitor "55" washer



#### **Combination Door and** Screen-door Hinge

This Heavy Duty, Extra Strong Hinge enables you to use one hinge for both swinging screen door and regular trailer door. 72" long with three 5" Screen Flaps. 3" wide when open. Countersunk embossed holes drilled and stag-gered every 3".

CMH-12 Wt. 7 lbs.

#### HANDSOME TWIN UNITS

MONITOR "JET" fully automatic DRYER . . . dries 6 lbs. in less than 90 minutes; . . . exclutive patented jet action eliminates tumbling, hanging and wear of your clothes.

PORTABLE

fits into any corner or closet, on wheels, only 16" x 16" x 32" high; gleaming white cabinet and utility top; weighs 65 lbs.

EASY LOADINGthrough top, no bending down.

AUTOMATICthermostatic timer.

NO INSTALLATION just plug in, works on any standard 110 volt line.

NO LINT TRAP to fuss with, no venting necessary.

SIMPLE TO OPERATE

ME-5 Monitor "Jet" drier



#### No wires or batteries needed! Door Chime-Name Plate

Add this cheerful earful to your door . . . to greet friends and family . . . with a warm musical welcome. So inexpensive . . . so easy to install. Has solid brass nameplate on outside of door. Uses no electricity . . . a turn of the handle sounds two chime notes. Fits metal or wood doors 3/8" to 13/4" (For installations thicker than 13/4" order shaft extension).

Door chime, Wt. 11/4 lbs. NT-2 Shaft extension. Wt. 2 oz.



Wipe Out Scratches on Furniture and Woodwork with Almond Stick

Tibet Almond Stick wipes out unsightly white scratches with one magic stroke. Stick will efface more than 1,000 scratches.


Z-50 Wt. lb.

Leslie's

THE SOUTH'S FIRST and

## COMFORTS for the MOBILE HOME

## by Strawsine





427 \* Sidewall Ventilator—Newly styled, Improved Model — Better than ever — much greater air

8" size. Heavy aluminum. Adjustable to wall thickness 15%" x 21/4". Simple installation—consists of only 2 parts: the grill, and the motorcolor-flange-assembly.

Our No. \$5-130 (427) Wt. 5 lbs.

\$5-131 Switch only SS-132 Motor and fan 55-133 Fan blade only 55-134 Motor only



127\* 8" Powered Ceiling Ventilator -with closing grill-very popular



8" Powered Attic Ventilator - takes air from attic only to relieve condensation.



128 \* 8" Powered Ceiling Attic Ventilator Combination-1 unit does 2 jobs-- for moderate attic ventilation.



5" Powered Bathroom Ventilator also for Eye Level Oven Ventilation and small areas.

#### 5" Powered Bathroom Ventilator

	SS-124 (225)	Wt. 5 lbs.
55-125	Cap and roof flange	assy.
SS-126	Motor and fan	Wt. 3 lbs.
SS-127	Ceiling grill	W+ 1/2 1h

#### 8" Powered Roof Ventilators

Our No. \$\$-160 (127)	Wt. 10 lbs.
Our No. 55-165 (128)	Wt. 10 lbs.
Our No. SS-170 (129)	Wt. 10 lbs.
\$5-139 Ceiling grill	Wt. 1 lb.
\$5-161 Cap and roof flange as	ssy.



151 \* Airchief All Weather Roof Ventilator-10" openingwith closing grill - with or without fan.



148 Powered Ceiling Ventilator 14" x 14". Similar to No. 120forced ventilation when desired.



120 Standard Roof Ventilator 14" x 14". The old stand-byvery effective . . very practical.



170 Skylight Roof Ventilator 14"x 14". Similar to No. 120has dual glass cover with air space between.

#### **Airchief Roof Ventilators**

Storm-proof covers, 6-sector grill for increasing and decreasing ventilation. Strong bronze screening. With and without power, 4" and 7"

Our No. \$5-107	(151-0) 10"		
ventila	tor without motor		
or fan		Wt. 1	5 lbs.
Our No. \$5-108	(151-S) With		
4" fan	and motor	Wt. 1	81/2 lbs.
Our No. \$5-109	(151-L) With		/ 1
7" fan	and motor	Wt. 19	9 lbs.
	motor and 4" fan		
only		Wt. :	3 lbs.
SS-120 Large	motor and 7" fan		
only		Wt.	31/2 lbs.

#### Non-Powered Roof Ventilators

14" x 14" all steel, electric welded. Frames telescoped to fit varying roofs. Patented channel gear raising and lowering mechanism, strong and rapid. Removable screen and inside garnish trim. Available with glass or metal top.

Our No.	SS-100 (170) Com-			
	plete ventilator with glass top	Wt.	11	lbs.
Our No.	SS-101 (120) Com-			103.
	plete ventilator with			
66 100	metal top	Wt.	101/2	lbs.
55-102	and a grass for			
	SS-100	Wt.	21/2	lbs.
55-103	Screen for either	Wt	11/4	lhe
SS-104	Channel mechanism for		1/4	103.
	either	Wt.	11/2	lbs.
SS-105	Handle for channel		12	
	mechanism	Wt.	2	07
SS-121	Metal top for SS-101		4	
SS-199	Clear glass for SS-100			
\$\$-138	Gasket for hammered g	Wt.	21/2	lbs.
Power	ed Roof Ventilato	r		

Wt. 181/2 lbs. Wt. 11/2 lbs.

Our No. \$\$-106 (148)

\$5-122 Screen for SS-106

## Leslie's THE SOUTH'S FIRST and FINEST

## COMFORTS for the MOBILE HOME

## by Strawzine



220
5" Powered Cook Stove
Ventilator — Hood type
— vents through roof —
latest design.



8" Powered Cook Stove
Ventilator — Hood type
— vents through roof —
greater capacity.

Our No. \$5-110 (220) 5-inch unit complete

 SS-111 Hood assembly
 Wt. 3 lbs.

 SS-112 Power unit
 Wt. 4 lbs.

 SS-113 Clamp-on pipe
 Wt. 2 lbs.

 SS-114 Stack
 Wt. 4 lbs.

Our No. SS-150 (227) 8-inch unit complete


 SS-150 (227)
 8-inch unit complete

 SS-151 Hood assembly
 Wt. 3½
 lbs.


 SS-152 Power unit
 Wt. 5 lbs.

 SS-153 Clamp-on pipe
 Wt. 2½
 lbs.


 SS-154 Stack
 Wt. 5 lbs.



66
Heat Stack Assembly
Complete - 4" Smoke Pipe.
Better heat protection —
Improved Ventilation.



Safety Stack Assembly
Complete - 4"Smoke Pipe.
— any heater —
New — U.L. Approved.



Safety Stack Assembly
Complete-5" Smoke Pipe.
— any heater—
New — U.L. Approved



Safety Draft Head for 4" Smoke Pipe. Better heat protection.



Safety Draft Head for 4" Smoke Pipe — any heater —



Safety Draft Head for 5" Smoke Pipe — any heater —

Don't leak · don't soot up · don't restrict draft.

U.L. Approved — now in general use.




Strawsine Heat Stack Cap

A very durable, trouble-free, die-drawn mushroom shaped pipe cap.

SS-115

55-115 Wt. 3 lbs.



Wt. 7 lbs.
Wt. 4 lbs.
Wt. 9 lbs.
Wt. 4 lbs.
Wt. 11 lbs.
Wt. 5 lbs.

T

51-T 2" Plumbing Stack a roof cap for the bathroom vent pipe.



53-T 3" Plumbing Stack A roof cap for the larger vent pipe.



53-G 3" Gas Water Heater Stack Meets requirements for gas vent flue head.



38 3" Gas Space Heater Stack Ventilated roof assembly for gas flue with ceiling plate.



Outside Vent Louvre —
for sidewall — used to
relieve condensation.

Our No. \$\$-180 (51-T) Our No. \$\$-182 (53-T) Our No. \$\$-184 (53-G) Wt. 3 lbs. Wt. 4 lbs. Wt. 4 lbs. Our No. SS-186 (38)

Wt. 4 lbs.

Outside dimensions  $2\frac{1}{2}$ " high by 5" wide; protrudes  $\frac{1}{4}$ ".

Our No. \$5-189 (405)

Wt. 3 oz.

Leslie's

## VENTILATOR EQUIPMENT

### for Cook Stove, Heat Stove, Plumbing

Available with and without Power Units

Mushroom cap top and roof saddle.

Die-stamped and riveted aluminum and galvanized sections. The base flange has 8 holes to assure proper sealing. 415 requires 6-in. roof opening,

Pipe. 15" long. Telescopes into roof saddle and top.

#### Adapter

Power unit (MXL) 11/2 Watt, permanently sealed and lubricated drives 7" fan. Light socket for 60-watt lamp. Switch control.

Cook Stove Hood. Stamped aluminum finished in white baked-on enamel. Size: 261/4" x 131/2" x 21/4". 7"





CMH-10 M-29





W-199






WP-9 Complete with power unit. Wt. 20 lbs.

WP-1 Unit less power. Wt. 12 lbs. WP-2 Cap and saddle. Wt. 41/2 lbs.

WP-3 Pipe, 15-in. Wt. 2 lbs. Pipe, 19-in. for unit without power). Wt. 21/2 lbs. Adapter. Wt. 2 lbs. Power unit. Wt. 8 lbs. WP-4

WP-5 WP-6

WP-7 Power Unit Less Light. Wt. 71/2 lbs.

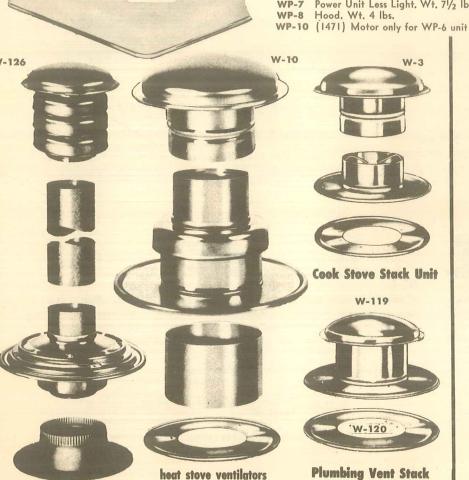

#### Sidewall Ventilating Louvres

Excellent for ventilating closets, electric refrigerators or to cover dent holes.

CMH-10 10" x 121/2"	Wt. 1 lb.
M-29 8" x 10"	Wt. 1 lb.
W-197 Round 4"	Wt. 5 oz.
W-198 2" x 4" wide	Wt. 5 oz.
W-199 1/8" x 2" wide	Wt. 2 oz.

#### Woodin, Revolving Stack, Top

Turns at the slightest breeze, the opening always shielded from wind and weather preventing downdraft. Double steel construction, electric welded, galvanized and enameled.

W-7 Wt. 3 !bs.

Tiered Heat Stove Vents. Includes tiered cap, 8" dia. 101/2" above roof. 4" extension pipe, 71/2" long. Roof saddle base, 12" dia. designed for flat roof. Ceiling plate, 4" opening, 10" dia.

W-126 Complete unit.

Wt. 6 lbs. Tiered cap. Wt. 3 lbs. W-127

W-142

Base. Wt. 3 lbs. W-128

Plate. Wt. 1 lb. W-129

Heat Stove Unit includes Mushroom cap. the overhang type, 71/2", 8" above roof, Roof saddle, base-flange with 8" base. Available for flat or curved roofs. And ceiling plate 4" opening, 10" dia.

W-10 Complete unit.

Wt. 51/2 lbs. Cap. Wt. 2 lbs.

W-8 Saddle (curved roof). Wt. 3 lbs. W-5

Saddle (flat roof). W-6

Wt. 3 lbs. W-9 Plate. Wt. 1/2 lb.

Cook Stove Unit includes Mushroom cap, 71/2" dia., 5" above roof, Roof saddle, base flange 8". Ceiling plate 4" opening, 10" dia.

W-3 Complete unit.

Wt. 51/2 lbs.

W-1 Saddle (curved roof).

Wt. 3 lbs. Saddle (flat roof).

Wt. 3 lbs.

W-4 Plate. Wt. 1/2 lb. W-8 Cap. Wt. 2 lbs.

Plumbing Vent Stack including single section roof saddle and cap, 6" dia., 41/2" above roof, and plate with 4" opening.

W-119 Vent Stack, Wt. 2 lbs. W-120 Plate. Wt. 1/2 lb.




Tiered Heat Stove Vents.

## WOODLIN





"M" Series

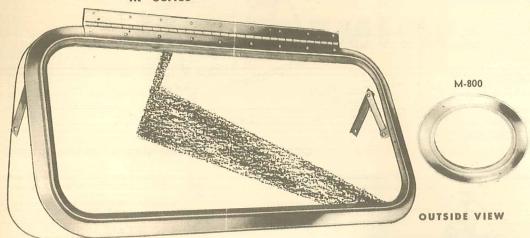


#### "M" Series Hinged Windows

Our Stock	Woodlin	<b>Opening Size</b>
Number	Number	Req. for Inst.
WM-10	M 1013	91/2" x 131/8"
WM-11	M 1017	91/2" x 165/8"
WM-12	M 1023	91/2" x 231/8"
WM-13	M 1031	91/2" x 311/8"
WM-14	M 1717	165/8" x 171/8"
WM-15	M 1723	165/8" x 231/8"
WM-16	M 1731	165/8" x 311/8"







#### **Powered Roof Ventilator**

Streamlined aluminum, 23 x 11 x 4". Louvre openings at top are offset to prevent water leakage. Quiet, efficient motor, permanently sealed and lubricated. 5-blade 7" fan. Removable copper screen. Roof opening size 12" x 16".

V-130	Complete	Wt. 15 lbs

W-131 Roof vent less motor and fan

W-133 Cover only

W-134 Roof plate only

Fan, motor, housing and screen Housing and screen



#### **Roof Ventilators**

Natural Draft Ventilator of aluminum and galvaneal sections. Absolutely weather tight when closed. Fine-mesh fibre—glass screen.

W-42	12" x	16"	ventilator	complete
		11		1 1

Operating mechanism w/slide—to repair 12" x 16" vent

W-140 Operating mechanism for 14" x 14" vent

W-141 Operating mechanism w/slide-to re-

pair 14" x 14" vent

W-43 Screen for 12" x 16" vent W-138 Screen for 14" x 14" vent

#### "M" Series Hinged Windows

offer a new high in nautical styling, ease of inboating pleasure with perfect visibility and ventilation all the way; sturdy piano type hinge and double cam locking arms which hold window at desired open position or lock when window dow is closed. Frames are of rust and corrosionresistant extruded aluminum and weather-tight sealing keeps water out when window is closed; less screen and outer frame.

#### **Portlight Hinged Window** Model M-5010

features the positive piano type hinge and double cam locking arms which hold window open at desired level and/or locks securely when window is closed; auditionally sealing; has permanent screen and weather-tight sealing; when window is closed; aluminum glass frame; opening size required 5" x 10", glass size 41/4" 91/4". Wt. 11/2 lbs.


WM-5 Model M-5010 portlight window

#### **Porthole Stationary Window** Model M-800

in corrosion-resistant aluminum; requires 8" di-ameter opening, 1" minimum wall thickness; ideal for small boats or as door units for larger cruisers. Wt. 1 lb.

WM-1 Model M-800 with clear glass
WM-2 Model M-800 with frosted glass

#### Sidewall **Power Ventilator**



#### Model 450 Sidewall Power Ventilator

Styled to blend with any mobile home exterior; adjustable to varying wall thicknesses; features "Powr-Pakt" induction motor with oilless bronze bearings. Handsome interior grill.


W-180 Sidewall ventilator complete Wt. 6 lbs.

Leslie's

W-137 | 14" x | 14" ventilator complete
W-139 Operating mechanism for | 12" x | 16"

vent. Wt. 11/4 lbs. W-14

## **Woodlin HINGED WINDOWS**

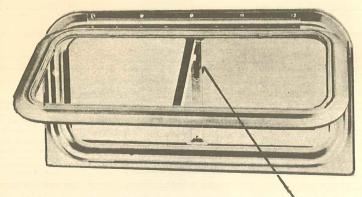


#### . in lifetime aluminum

With Crank-Out Mechanism

		Opening Size	
No.		Req. for Inst.	
		101/8" x 131/8"	
W-26	10" x 17"	101/8" x 171/8"	121/2" x 19"
W-27	10" x 23"	101/8" x 231/8"	121/2" x 25"
W-28	10" x 31"	101/8" x 311/8"	121/2" x 33"
W-29	17" x 23"	171/8" x 231/8"	191/2" x 25"
		171/8" x 311/8"	
W-31	17" x 43"	171/8" x 431/8"	191/2" x 45"



	<b>OPENING</b>	OR	HINGED	TYPE
(B) (A) (SF)	0		WIND	OWS

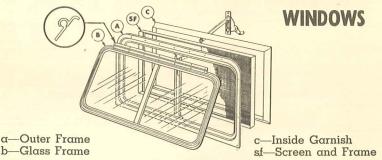

(in circle) end view of extruded hinge.

#### COMPONENT WINDOW PARTS


Window Size	(A) Outer Frame w/Channel Att.	(B) Frame	(C) Garnish	(SF) Screen and Screen Frame
1013	WP-141	WP-151	WP-161	WP-171
1017	WP-142	WP-152	WP-162	WP-172
1023	WP-143	WP-153	WP-163	WP-173
1031	WP-144	WP-154	WP-164	WP-174
1717	WP-145	WP-155	WP-165	WP-175
1723	WP-146	WP-156	WP-166	WP-176
1731	WP-147	WP-157	WP-167	WP-177
1743	WP-148	WP-158	WP-168	WP-178
Monitor	WP-149	WP-159	WP-169	WP-179

#### CRANK OUT MECHANISM


W-190	for 17-in. window
	with channel
W-191	for 17-in. window
	less channel
W-192	for 10-in. window
	with channel
W-193	for 10-in. window
	less channel

Conversion kits for changing windows from "push-out" to crank style are W-190 and W-192.

## 720-G 720-E 720-F



#### PUSH OUT MECHANISM



W-36 (700-D) Window hook
W-37 (700-F) Outer frame center channel for 17" window

WP-29 (700-F) Outer trame center channel for 10" window

W-38 (700-G) Glass frame center channel with

adjusting arm attached for 17" window


WP-30 (700--G) Glass frame center channel
with adjusting arm attached for 10" window

W-39 (700-GA) Adjusting arm only for 17" window

WP-31 (700-GA) Adjusting arm only for 10"


window
(700-H) Adjusting arm knob and screw
W-41 (700-L) Window control lock assembly


WP-28 Sponge rubber gasket 5/16" x 3/8" per foot



Equipped with new gear-operated opening mechanism, new roll formed garnish with lustrous finish and chrome plated screen frame. Outer overall size 7" x 19". Requires wall opening 51/8" x 171/8".

W-44 Wt. 5 lbs. Y-20 Drip cap Wt. 1/2 lb. W-194 Operating mechanism only






#### **Woodlin Door Windows**

Die-stamped aluminum frames, with glass set in a rubber glass channel. Windows easily installed by wood screws in the outer flange. W-33, W-33F, W-34, W-34F with inside garnish. W-32, W-32F, W-35, W-35F, less garnish. Available in round or rectangular shapes. With clear or frosted glass. Wt. 5 lbs.

Clear	Opening Size	Outer Frame
Glass	Required	Overall Size
W-34	161/8" diam. (round)	18" diameter
W-33	121/2" x 181/2"	14" x 20"
W-32	165/8" x 165/8"	181/8" x 181/8"
W-35	16 1/8" x 22 1/8"	181/8" x 241/8"
Frosted		
W-34F	161/8" diameter	18" diameter
W-33F	121/2" x 181/2"	14" x 20"
W-32F	5/8" x 165/8"	181/8" x 181/8"
W-35F	165/8" x 225/8"	181/8" x 241/8"



#### WINDOW VISORS

Y-16 Y-34 Y-46 Y-66 Y-84 Y-102 Y-127 Y-20 Y-35 Y-48 Y-70 Y-86 Y-107 Y-130 Y-24 Y-36 Y-52 Y-72 Y-88 Y-111 Y-134 Y-26 Y-38 Y-54 Y-74 Y-90 Y-112 Y-138 Y-28 Y-40 Y-60 Y-76 Y-91 Y-31 Y-42 Y-64 Y-80 Y-96 Y-118 Y-146 Y-123 Y-154

Leslie's

## WOODLIN'S NEW

# STANDARDIZED

## PREMIER

ern mobile home.


AWNING AND

PICTURE WINDOW

COMBINATIONS

The beautiful, new all-extruded Aluminum windows that add comfort, convenience, beauty and value to the mod-


**PICTURE** 



AWNING



JALOUSIE



	PICTURE
SIZE	WINDOW
Height Width	Series 100
167/8" x 167/8"	WP-1717
167/8" x 227/8"	WP-1723
16 1/8" x 30 1/8"	WP-1731
167/8" x 427/8"	WP-1743
22 1/8" x 16 1/8"	WP-2317
22 1/8" x 22 1/8"	WP-2323
22 1/8" x 30 1/8"	WP-2331
22 1/8" x 42 1/8"	WP-2343
301/8" x 161/8"	WP-3117
301/8" x 221/8"	WP-3123
307/8" x 307/8"	WP-3131
301/8" x 421/8"	WP-3143
427/8" x 167/8"	WP-4317
42 1/8" x 22 1/8"	WP-4323
427/8" x 307/8"	WP-4331
42 1/8" x 42 1/8"	WP-4343
70	

TYPE

Series 300

WA-1717

WA-1723

WA-1731

WA-1743


WA-2317

WA-3117

WA-4317

(See page 30 for crank operating mechanisms) AWNING AND PICTURE WINDOW COMBINATIONS WITH with with AWNING AWNING AWNING WINDOW WINDOW WINDOW

**JALOUSIE** ON TOP ON BOTTOM Series 800 WINDOW Series 700 WJ-1717 WAP-1723 WPA-1723 WJ-1723 WAP-1731 WPA-1731 WJ-1731 WAP-1743 WPA-1743 WJ-1743 WJ-2317 WJ-2323 WAP-2323 WPA-2323 WJ-2331 WAP-2331 WPA-2331 WAP-2343 WPA-2343 WJ-2343 WJ-3117 WPA-3123 WJ-3123 WAP-3123 WJ-3131 WPA-3131 WAP-3131 WJ-3143 WAP-3143 WPA-3143 WJ-4317 WPA-4323 WJ-4323 WAP-4323 WJ-4331 WAP-4331 WPA-4331 WAP-4343 WPA-4343 WJ-4343 Premiere series windows have those clean, simple lines that match the trend toward lighter, brighter, more attractive styling for mobile living; they feature the famous leak-proof, life-long, all extruded aluminum construction, with integral screen frame (on opening windows), smooth operating and locking mechanisms, plus the enhancing beauty and sound engineering that makes for fast, simple installation. All this plus built-in accommodations for a self-contained, matching storm sash that is easily removed for seasonal cleaning-yet never requires



Available in a wide range of beautiful, functional, awning, casement, tiered, or picture window styles.



W-16

All Woodlin Premiere Series windows, of an opening type such as awning, casement, or

tiered windows, feature dual protection of the attractive, crank operated opening and closing mechanism plus the handle-lever type device that insures a positively locked, weather tight

seal. The crank operated mechanism provides accurate, individual ventilation control without effort. Both the crank operator and the locking handle are inset on the inner frame so as to offer no projecting hazard.

W-16 Screen lock

#### Jalousie Window **Operating Mechanism**

smooth working, quality-built operating mechanism provides a lifetime of convenient, accurate service. Note that operating mechanism is set well within the window edge so as to eliminate problems with drapes, etc.

Jalousie operating mechanism




#6791 New Woodlin operator. Not inter-changeable with #4535.

Leslie's

THE SOUTH'S FIRST and

# MARVEL EXTRUDED ALUMINUM WINDOWS



#### JALOUSIE WINDOW

Built exclusively for mobile homes. Frame does not protrude beyond interior wall paneling. Extra heavy extruded aluminum frames and quiet, positive crank operation.

#### JALOUSIE WINDOWS

#### Assembled with

Height-Width	Glass and	
	Screen	Garnish
17-7/8" × 17-7/8"	MJ-1818	MJG-1818
177/9" x 24-1/4"	MJ-1824	MJG-1824
17.7/8" x 31-5/16"	MJ-1831	MJG-1831
177/8" x41-//8	MJ-1842	MJG-1842
20 2/4" x 1/-//8	MJ-2118	MJG-2118
00 2/4" x 24-1/4	MJ-2124	MJG-2124
20 2/4" x 31-5/10	MJ-2131	MJG-2131
20 2/4" x 41-1/8	MJ-2142	MJG-2142
24-1/4" x 1/-//8	MJ-2418	MJG-2418
04 1/A" x 24-1/4	MJ-2424	MJG-2424
24-1/4" x 31-5/16	MJ-2431	MJG-2431
24-1/4" x 41-1/8	MJ-2442	MJG-2442
31-5/16" x 1/-//8	MJ-3118	MJG-3118
31-5/16" x 24-1/4	MJ-3124	MJG-3124
31-5/16" x 31-5/10	MJ-3131	MJG-3131
31-5/16" x 41-7/8	MJ-3142	MJG-3142
41-7/8" x 1/-//8	MJ-4218	MJG-4218
41-7/8" x 24-1/4	MJ-4224	MJG-4224
41-7/8" x 31-5/16	MJ-4231	MJG-4231
41-7/8" x 41-7/8"	MJ-4242	MJG-4242








#### JALOUSIE MECHANISMS M-101 (W-629) New Style

M-102 (W-690) Old Style

Marvel	Wind	ow Louve	ers
Stock	Louver	Stock	Lo


Stock	Louver	Stock	Louver
No.	Length	No.	Length
L-11	11"	L-60	60"
L-19	19"	L-65	65"
L-25-M	25"	L-70	70"
L-32	32"	L-75	75''
L-43	43"	L-85	85"
L-45	45"	L-90	90"
1-50	50''	L-100	100"
L-55	55"	L-38	38,,



#### PICTURE WINDOW

Completely welded extruded aluminum frames.

PICTURE	WINDOWS	
<b>Body Opening</b>	Window	Garnish
20-3/4" x 17-7/8"	MP-2118	MPG-2118
20-3/4" x 24-1/4"	MP-2124	MPG-2124
20-3/4" x 31-5/16"	MP-2131	MPG-2131
20-3/4" x 41-7/8"	MP-2142	MPG-2142
31-5/16" x 17-7/8"	MP-3118	MPG-3118
31-5/16" x 24-1/4"	MP-3124	MPG-3124
31-5/16" x 31-5/16"	MP-3131	MPG-3131
31-5/16" x 41-7/8"	MP-3142	MPG-3142
41-7/8" x 41-7/8"	MP-4242	MPG-4242




#### HINGED WINDOW

May be installed in either horizontal or vertica position. Will open to an angle of approximately 70 degrees.

#### CRANK OPERATED SINGLE HINGED WINDOWS

Be	ody Op	ening	Window	Garnish	
		x 17-7/8"	MH-101	8 MHG-1018	
10	)-3/16"	x 24-1/4"	MH-102	4 MHG-1024	
1(	)-3/16"	31-5/16"	MH-103	1 MHG-1031	
10	)-3/16"	x 41-7/8"	MH-104	2 MHG-1042	
17	7-7/8"	x 17-7/8"	MH-181	8 MHG-1818	
17	7-7/8"	x 24-1/4"	MH-182	4 MHG-1824	
17	7-7/8"	x 31-5/16"	MH-183		
-17	7-7/8"	x 41-7/8"	MH-184		



(W-577) (XCK-10) (XCK-18) M-99 (W-577) 10" crank mech. M-100 (W-576) 18" crank mech.


Kits to convert lever to Crank Mech. M-103 (XCK-10) 10" conversion kit M-104 (XCK-18) 18" conversion kit



#### Marvel Aluminum Door Windows

The outer frame, complete with glass and rubber seal, with inner-trim garnish. Furnished with clear or Factrolite (opaque) glass. Wt. 10 lbs.

With Factrolite Glass M-75 Round, 181/4" dia. M-76 Round, 161/4" dia. M-77 18-1/16" x 16-1/16" With Clear Glass Round, 181/4" dia. Round, 161/4" dia. M-79 M-80 18-1/16" x 16-1/16" M-81



Extruded aluminum vent window that harmonizes with all other Marvel windows. Offers maximum ventilation—maximum opening; positive crank operation, waterproof hinge. Takes body opening of 51/8" x 171/8". Complete with inner garnish.


#### MV-518 VENT WINDOW



(W-639)

MV-520 (W-639) Vent operating mechanism

**CROSS VENT** WINDOW



#### KEENE CROSS VENTILATION WINDOW

Fits 43/8" x 193/4" opening.


K-30 Window. Wt. 5 lbs. K-31 Drip cap. Wt. 1/2 lb.

Operating mechanism. Wt. 1/2 lb. K-32

NOTE! ORDER GARNISH FRAMES SEPARATELY WHERE NEEDED. THEY ARE NOT A COMPONENT PART OF WINDOW.







**Marvel Electric Refrigerators** 

Gleaming white porcelain enamel. Tecumseh compressor hermetically sealed for life. Refrigerant Freon 12. Designed for space-saving!

4 cu. ft. Model

lce-cube trays. Bottle storage room. Dimensions: 40¾" high, 23" wide and 22½" deep, over-all.

M-82 Wt. 200 lbs.

5.6 cu. ft. Model

Full-width freezer. Space for tall bottles. Dimensions: 44¾'' high, 25" wide and 22½'' deep, over-all.

M-86 Wt. 250 lbs.

M-83 Rubber gasket for Marvel 4' refrigerator M-84 Rubber gasket for Marvel 5.6' refrigerator


#### Quicfrez



Model 102E is 10.2 cu. ft. with 36 lb. full width frozen food chest; 2 ice cube trays; green, white trim color styling; 3 extra shelves in door; full width chil-tray; full width, deep, greens crisper; leveling glides; 551/2" high, 283/8" wide 281/2" deep. Wt. 250 lbs.

Our No. 5-4

# Quicfrez



## The Quicfrez Twins Model 56A Refrigerator Q42B Freezer

**Model 56A Refrigerator** 

Big, little refrigerator. Quic-chill tray. Party icecube trays. Removable shelves to make room for bulk storage. 5.6 cu. ft. capacity. Dimensions: 38½" high, 24" wide and 28" deep, over-all.

5-6 Wt. 180 lbs.

#### Q42B Freezer

4.2 cu. ft. storage space with 7 sq. ft. shelf area. 1/6 h.p. compressor. Removable shelves for flexible storage. I-Year Freezer Warranty. 5-Year Condensing Unit Warranty. Dimensions: 381/2" high x 24" x 28" deep overall.

S-7 Wt. 210 lbs.

#### **Fully warranted**

1 year refrigerator warranty, plus 4 year warranty on hermetically sealed refrigeration system

#### Quicfrez

Model 78A is 8.1 cu, ft, with 32 tb. full width frozen food chest; full width chil-tray; two shelves in door; no fussiness but all essentials and a lot of extras; 511/4" high, 243/8" wide, 301/4" deep. Wt. 205 lbs.

Our No. S-1

Model 81EB is 8.1 cu. ft. with 32 lb. full width frozen food chest; full width chil-tray; three extra shelves in door; removable shelves; full width deep, greens crisper; leveling glides; 511/4" high, 243/8" wide, 291/2" deep. Wt. 205 lbs.

Our No. S-2

Model 81F is 8.1 cu. ft. DELUXE with 32 lb. full width frozen food chest; 3 ice cube trays; green, gold trim color styling; new butter keeper with 1 lb. capacity dish; full width chiltray; full width, deep, greens crisper; adjustable pull-out shelf; leveling glides; 511/4" high, 243/8" wide, 291/2" deep. Wt. 210 lbs.

Our No. 5-3

## LITTLE GIANT

Genuine Butane refrigerator engineered especially for mobile homes. Five-year guarantee. Compact design, butane or electric. Tropicalized unit effective to 115-degree temperature.



Dimensions:

1½ cu. ft. 28¾" high, 21¼" wide, 21¼" deep.

#### Model G400 - 1 1/2 cu. ft.

Built-in construction, but can be used as a freestanding model because of the base built all around, instead of the rubber feet. This also is a fool proof type of installation and permits proper ventilation of air.

#### BUTANE MODEL

LG-20 (G400) 11/2 ft. standard, built-in

#### ELECTRIC MODELS

LG-22 (40E) 1½ ft. standard, free-standing LG-23 (40EB) 1½ ft. standard, built-in



Model G-55 Dimensions: 2 cu. ft. 24¾" high, 20¾" wide, 21¼" deep

A slim, sleek refrigerator for the travel trailer. Has a super-charged cooling unit capable of effectively cooling a chassis 50% larger than this model, which ensures unbeatable refrigeration.

#### BUTANE MODEL

(use for free-standing or built-in construction.)
LG-2 (G55) 2 ft. standard

ELECTRIC MODELS

LG-3 (E55) 2 ft. standard, free-standing LG-4 (55-EB) 2 ft. standard. built-in



Dimensions:

3 cu.ft. 31½" high, 22½" wide, 26" deep

BUTANE MODELS

LG-30 (75G) 3 ft. tropical, free-standing


LG-31 (75GBI) 3 ft. tropical, built-in

ELECTRIC MODELS

LG-32 (75TA) 3 ft. tropical, free-standing LG-33 (75EB) 3 ft. tropical, built-in

Leslie's

## **DUO-THERM** Oil and Gas Heaters and Accessories



#### MORE VERSATILE,

#### MORE POWERFUL, AUTOMATIC!

#### Low-cost 20,000 BTU **Duo-Therm Heaters (525PA)**

Small or medium mobile home; manual Power-Air blower standard equipment installed at factory; 91/2" exclusive dual chamber burner; constant level control; 21/4 gal. built-in tank; 4" automatic draft minder included. Beautiful cabinet, shining platinum finish, only 12 x 20 x 30" high.

DT-5 Complete, Wt. 86 lbs. DT-1 Heater only. Wt. 70 lbs. DT-2 Blower only. Wt. 20 lbs.

#### New 27,000 BTU **Duo-Therm Oil Heaters (530)**

Heater with larger blower for medium-large mo-bile homes; improved 9½" dual chamber burn-er; constant level control; 2¾ gal. built-in tank, 3-way valve; new built-in exclusive automatic Power-Air blower that turns itself on and off; includes 4" automatic draft minder, platinum flue shield; extra adapter and register for back bedroom and fresh-air intake ring. Beautiful cabinet in shining platinum finish. 22" x 14" x 481/2" high.

DT-3 Wt. 115 lbs.

#### **Duo-Therm Oil Heaters (540)** With 2-speed Automatic Blower

Same specifications as 530 with the addition of 2-speed automatic Power-Air blower for in-creased heat output. 9/2" dual chamber burner; constant level control; 2¾ gal. built-in tank, 3-way valve; new 2-speed blower with night or day, mild or cold weather setting that turns itself on and off; includes 4" automatic draft minder, platinum flue shield; extra adapter and register for under-floor and fresh-air intake ring. Beautiful cabinet in shining platinum finish. 22" x 14" x 481/2" high.

DT-4 Wt. 120 lbs.

#### Duo-Therm Gas Heater (551)

40,000 BTU input, exclusive crossfire-jet burner? burns a clean, efficient flame from high to low—gets more heat from every gas; improved automatic blower turns itself on and off when thermostat brings on or shuts off heat; includes draft diverter, extra adapter and register for back bedroom and fresh-air intake ring. Beautiful cabinet in shining platinum finish. 22" x 48" Wt. 115 lbs. high.

DT-7 Manual operation

DT-8 Remote thermostat control

#### CHANGE-OVER KIT

. . . from L.P. gas to natural gas; . . . OR from natural to L.P. gas. Orifice kit with regulator complete.

DT-80 Kit from L.P. to natural gas DT-81 Kit from natural to L.P. gas

#### **Draft Regulators**

Junior regulators with specific settings on the calibrated dial. 4-in. pipe section. Wt. 2 lbs.

Duo-Therm Automatic Draft-Minder for any heater using 4-in. chimney. Wt. 21/2 lbs.

DT-10 Black. DT-11 Chrome.



#### **Duo-Therm Down Draft Hoods**

A smoky flame, the odor of burned oil, or high fuel consumption may be caused by a poor flue connection or a down-draft. For down-draft protection. Aluminum hood; for 4" pipe.

DT-12 Wt. 3 lbs.

### Motors for Duo-Therm Blowers

Wt. 5 lbs.

DT-20 Motor 105634 for blower 125, heater #525. Platinum.

DT-21 Motor 105610 for blower 106, heater #525, Sun-tan.

DT-22 Motor 105600 for blower 103, heater #525. Sun-tan.

DT-60 Motor 900264 for heater #530 prior to 1954.

DT-61 Motor 105677 for heater #530. '54, '55 model.

DT-62 Motor 105670 for heaters #540, 551.

#### Other Heater Accessories

DT-23 Manual Switch for motors.

DT-24 Tank pipe.

Burner pipe. DT-25

Pipe dope DT-26 (8 oz. can)

DT-27 Thermo switch.

DT-14 Adapter.

Three-way switch. DT-28


DT-29 45° union elbow.

#### **Duo-Therm**

#### Three-way Valve

For models 530 and 540 for quick switching from outside bulk supply to built-in fuel tank.

DT-13 Wt. 1 lb.



DUO-THERM SERVICE KIT-Every service man needs this inexpensive, all-inclusive Duo-Therm service kit. It contains all the tools necessary to properly install and service mobile home


Our No. DT-65 Wt. 5 lbs





Community of the last of the l

## THE SOUTH'S FIRST

# Oil and Gas Heaters for Mobile Homes **Coleman Heaters**







710

700-701

### OIL HEATERS

Model 610A (Our No. CO-1) 23,000 BTU, complete with manual controls, flue cover and draft regulator; 14" wide, 201/2" deep, 36" high. Wt. 87 lbs.

Model 4001 (Our No. CO-2) 23,000 BTU, for underfloor duct systems. Complete with duct adapter, flue cover and draft regulator; 14" wide, 201/2" deep, 36" high. Wt. 87 lbs.

Model 700 (Our No. CO-3) 30,500 BTU, complete with manual control, duct adapter, flue cover and draft regulator; 131/2" wide, 20" deep, 60" high. Wt. 136 lbs.

Model 710 (Our No. CO-6) 42,000 BTU closet furnace, complete with duct adapter, flue cover, roof jack, draft regulator and automatic wall thermostat; 17½" wide, 19" deep, 62½" high. Wt. 215 lbs.

### Gas Heater

Model 701 (Our No. CO-5) 38,000 BTU input, with automatic Modusnap thermostat, flue cover and duct adapter: 131/2" wide, 20" deep, 60" high. Wt. 136 lbs.

### COLEMAN HEATER MOTORS

CO-25 Motor 867-2011 for heaters 492, 492-A

CO-26 Motor 610A2261 for heaters 610, 610A, 3001, 3010, 4001

CO-27 (701-2261) for heater 700, 701 (must use 700-1321 speed choke assembly with above motor)

CO-28 Motor 710-1751 for heaters 710, 3011

### **Chimney Crown**



CO-43 (299-8941) 4" CO-45 (299-8951) 5"

### OTHER COLEMAN PARTS

CO-36 Mount 492-2121 (motor-3 to Pkg.) CO-37 Switch 491-2051 (blower-2 pos.) CO-38 Switch 700A2391 (blower-3 pos.)

CO-39 Motor bracket 492-210


CO-40 Top burner ring 492-3021 CO-41 Gasket 492-3041 for top burner ring

CO-42 Low flame ring 492A3221 CO-44 (700A1481) Thermoswitch

CO-46 (700-1151) Three-way valve CO-47 (700-5121) Baffle flue

CO-48 (700B4201) Grille

CO-50 (610-1341) Valve rod knob




### SETTE FUEL OIL FILTER

Removes dirt, scale and water from fuel, assures free-flowing, clean burning oil. Reduces fuel and maintenance bills. Provides fitting on tank with shut-off cock and fitting to 3" supply line. Ideal for gravity fuel installations.

W+ 3 lbs.

### International Heater Motors (Wt. 8 lbs.)

E-22 Motor NAC41-37 for NAC41 heater E-26 Motor 18M8 for 100, 200, 300 heaters E-29 Motor 400-696 for "400" heater







PR-50 PR-51

### Panelray Bottled Gas Heater

Radiates infra-red heat rays which travél at the speed of light and actually penetrate your blood stream before the air is warmed. That's rightinstant heat radiated at body height, which warms you from head to toe regardless of air temperature. Fits conveniently into a corner, requiring only a 9" circle of floor space, and is 5534" high. Available in two sizes.

PR-50 Model F-12, 12,000 BTU. Wt. 35 lbs. PR-51 Model F-18, 18,000 BTU. Wt. 38 lbs.

### It's-a-Daisy Auxiliary Heater

Auxiliary heater which can be used with L. P., natural or manufactured gas. Can be attached to floor, shelf, or table. Also used as a cook stove while it heats. One of the handiest items for the trailer. 81/2" high x 6" round.

X-4 Wt. 5 lbs.

### Barnes Heater Accessories

Outside fuel tank. Wt. 8 lbs.

Single blower. Wt. 6 lbs. Double blower. Wt. 8 lbs. **BH-3** 

BH-4



### **Fuel Oil Filters**

Cast-metal and steel construction—no danger of breakage. No cover leaks. Double-filter protection with fine wire screen inside felt element treated to eliminate lint. Generous size 3/8" inlet-outlet openings. Simple installations.

DT-15 General oil filter IA-25. Wt. 4 lbs. DT-16 Filter element. 1/2 lb.

Leslie's THE SOUTH'S FIRST and FINEST





# MODEL 2400 OIL CONTROL VALVE

### MODEL 356 OILIFTER **AUTOMATIC FUEL OIL** PUMP

The A-P Oilifter lifts fuel oil automatically or up to 25 feet. It feeds and keeps an oil burning appliance supplied at all times ... operating only when necessary to maintain a sufficient oil supply for one or more heaters.

Just start the Oilifter at the beginning of the season . . . no further attention is required. Save steps and time, and eliminate the drudgery of fuel tank filling.

Easily installed with only one 1/4" O.D. copper tube, Wt. 101/2 lbs.

AP-30 Model 356-11 Oilifter less cord and plug AP-31 Model 356-12 Oilifter with cord and plug



### MODEL K252EA THERMOSTATIC CONTROL ACCESSORY KIT

The model 252EA Electric Conversion Kit converts Models 252A, 252A-Y, 252D, or 252L-DB manual trailer control to an automatic unit conmanual trailer control to all automatic unit controlled by a modern electric room thermostat.

Complete conversion kit consists of thermostat,

Trailer Control Electric Top, a 12-volt transformer, 25 feet of two-conductor thermostat cable, 12 insulated staples and screws. Provides complete control of room temperatures.

Wt. 21/2 lbs.

AP-40 K-252EA conversion kit w/box mtg. transformer

AP-41 K-252EA conversion kit w/plug-in transformer

### REPLACEMENT PARTS

AP-42 Thermostat 88 F-6 Box mounting transformer 49364

Plug-in type transformer 49364P AP-44

Electric top 252EA Thermostat cable AP-46


Thermostat base assy. Thermostat cover w/tube, strap and AP-47 AP-48

Thermostat mounting screws (2)

MANUAL HANDLE
AND
SAFETY RESET CTUATING OIL TEMPERATURE OUTLET TO BURNER

Safely meters the flow of oil from tank or A-P Oilifter to an oil burning space heater, furnace or similar equipment using vaporizing burner; features all steel case and cover for your added protection; a safety trip-out is included to insure positive shut-off of the oil at inlet; delivers a metered flow of oil to a single burner; high fire and low fire rates are stamped on nameplate in cubic centimeters per minute; inlet of control is at the end, and outlet is from the bottom-both connections are tapped 1/4 inch I.P.T.


Standard equipment on most 1958 heaters. Cannot be used as replacement for 252D Valve Wt. 31/2 lbs. AP-70



### **MODEL 22 A THERMOMATIC** COMFORT CONTROL

Remote thermomatic comfort control with full modulation, non-electric thermostat for use on 252D oil control valve. Changes in the weather have a tendency to change the amount of heat required to maintain your comfort. Model 22A thermostat feels this change and increases the oil flow to the burner when the weather is be-coming more severe. On the other hand, the flow of oil is decreased as the weather becomes milder. Force is transmitted by the capillary tube. No electricity is required. Wt. 1½ lbs.

AP-55 Model 22A Thermomatic comfort con-



### MODEL 119A FLAME PROVER

Dependable safety device will stop flow of oil to your furnace if the flame fails. Rugged construction for long, trouble-free service. Easy to

AP-65 Flame prover



### MODEL 252D TRAILER OIL CONTROL VALVE

The 252D Trailer Oil Control Valve is designed to meter and control oil flow on heaters which are not normally in a level position. Can be tipped slightly and will still deliver a continuous supply of oil with safety.

Wt. 21/2 lbs.

### MODEL 252D OIL CONTROL VALVES

AP-1 Calibrated 12cc, flow rating 12cc AP-2 Calibrated 16cc, flow rating 16cc AP-3 Calibrated 15cc, flow rating 13 to 15cc AP-4 Calibrated 17cc, flow rating 15 to 17cc AP-5 Calibrated 18cc, flow rating 18cc AP-6 Calibrated 21cc, flow rating 19 to 21cc AP-7 Calibrated 25cc, flow rating 23 to 25cc AP-8 Calibrated 26cc, flow rating 26cc

### REPLACEMENT PARTS FOR 252AY AND 252D OIL CONTROL VALVES

AP-10 Needle valve gasket

AP-11 Cover gasket

AP-12 Name plate

AP-13 Float and bracket assy.

AP-14 Strainer assy.

AP-15 Strainer gasket

AP-16 Metering stem assy.

AP-17 Metering stem spring

AP-18 Needle valve assy. AP-19 Needle valve spring

AP-20 Mounting bracket

THE SOUTH'S FIRST and FINEST



For converting oil heater to natural or bottled gas; or to use for auxiliary heating. Designed to fit into your present oil heater to give more heating comfort; gives you a 3-way heater with choice of (1) gas heat alone, or (2) if you run out of gas you can use oil alone, or (3) burn both gas and oil at the same time for extra heat. Each burner complete with all connections and ready for easy installation.

When ordering, be sure to specify: NATURAL GAS or BOTTLED GAS, whichever will be used; also, MODEL AND MAKE OF HEATER.

WF-1 Single burner WF-5 Multiple burner Wt. 7 lbs.

W+. 9 lbs.

100% Safety Shut-off Pilot — Thermocouple

UNITROL

Includes 100% Safety Shut-off, Pilot, Thermocouple and Thermostat "All in One."

WF-15 Thermostat with safety valve and pilot



Safety valve with pilot WF-10

### **Draft Regulators**

Junior regulators with specific settings on the calibrated dial. 4-in. pipe section. Wt. 2 lbs.


CS-3 Black.

RE-1 Chrome,

Duo-Therm Automatic Draft-Minder for any heater using 4-in. chimney. Wt. 21/2 lbs.

DT-10 Black.

DT-11 Chrome.



Standard black pipe, 4"x24" long. I Ib.

Chrome pipe. 4"x24" long. 2 lbs.

Elbow for 4-in. Pipe Adjustable to 90°, Wt. 12 oz.

CT-2 Standard black. RE-10 Chrome.

**Brownie Lighter** 


For fuel oil burners, clean, quick, safe.

X-1 Wt. 1/2 lb.

### Clean-Right Soot Remover

A 1/8" layer of soot raises your fuel costs as much as 25% | Clean-Right does a complete cleaning job. No special equipment needed.

DT-17 3-oz. can. DT-18 8-oz. can.



For 55-gal. Oil Drum Fil-Thru Gauge-Vent-Fill Pipe

Attractive. Finished in baked-on enamel, and fits

snug against outside wall of mobile home. Slips

simply on the brackets provided. Fill cap is


identical with auto tank cap. Oil line direct to

heater inside. With special fuel oil filter.

The perfect answer for installing a gauge in a drum with only one opening. Installed in the one-opening, need not be removed when filling tank. Accurate, rugged, rainproof, corrosion proof, and inexpensive. Installed without sealing compound.

F-80





### Folding Oil Drum Racks

Substantially made. Folds up easily for shipping or storage.

TD-20 Single stand, 42" high Wt. 25 lbs. TD-21 Single stand, 54" high Wt. 27 lbs.

Wt. 35 lbs. TD-22 Single stand, 72" high

TD-25 Double stand, 54" high Wt. 45 lbs. TD-26 Double stand, 72" high Wt. 50 lbs.

Adjustable extension legs (set of 4)
Wt. 9 lbs.

HE SOUTH'S FIRST and FINEST

# W SASTI ecoce

Dixie "Spacemasters" the biggest little ranges in any kitchenettel 2 standard, and 2 giant burners, black porcelain burner grates.

Oven 16 x 18 x 13 fully insulated, with accurate oven heat control. Drop-front broiler, adjustable broiler page Curred front de-2-pc. adjustable broiler pan. Curved front design. Gleaming white life-time porcelain. Wt. 176 lbs.

D-1 Deluxe model has new chrome trimmed backguard with top-surface light, appliance outlet, Telechron clock, and I-hour timer. Light in oven. Oven door window. White drip pan, and aluminum burner caps.

D-3 Standard model





# langes



Dixiemaster "Thirty"

The new 30" stove with the fabulous large widthof-the-range oven. Hi-style backguard with chrome and gold trim, fluorescent light, appli-ance outlet, electric clock and I-hour interval timer with gold bezel. Divided top surface has 2 standard and 2 giant lifetime burners with aluminum burner caps, gray porcelain grates and white porcelain drip trays, Doors have new type handles. Drop front broiler with 2-pc. adjustable pan. Light in oven, and oven-door-window.

D-15 Wt. 210 lbs. DIXIE STOVE REPLACEMENT PARTS


D-4 Top burner double grate

D-5 Single grate D-6 Drip tray

D-7 Heat control complete

D-8 Oven door spring

D-9 Valve handle




"Princess" Complete Range for Cabinet or Leg Mounting


Only 23-in. high, but with all the practical features of a full-size unit. Three standard "life-time" surface burners. Generous oven (161/2 x 14 x 101/2). High-speed smokeless broiler. White Titanium acid-resistant porcelain exterior, full porcelain interior, with full chrome top. Pastel yellow or green backguard panel and manifold cover.

D-10 Standard model

D-11 Deluxe model with Robertshaw oven heat control.

# reway GAS RANGES





**Trailer Rangette** 

With large 3-burner cooking space. Oven size 16 x 141/2 x 11. Well insulated, with Robertshaw heat control, regulates heat from 250 to 550 degrees. Hinged cast-iron cooking grates. 2 oven racks. Removable porcelain drip tray. Operates on propane or butane gas at 6 oz. pressure. Iyory baked enamel with hinged burner cover to match. Size: 20-5/16" high x 231/2" wide.

P-209 Wt. 101 lbs.



White porcelain enamel front, balance baked black japan, rust and heat resistant. All corners rounded. Drip pan removable for easy cleaning. Fast, efficient burners.

CC-100 Two-burner, 20" wide x 12½" deep, 7" high, Wt. 19 lbs.
CC-102 Three-burner, 30" wide x 12½ deep, 7" high, Wt. 27 lbs.

### **Aluminum Griddle**

Fits any stove or hot plate. Ideal for quick frying or pan broiling.  $17\frac{1}{2}$ " x  $11\frac{1}{2}$ " with basting trough on side. Scientifically designed to eliminate hot-cold spots.


CC-101 Wt. 5 lbs.

Wt. 155 lbs. P-211 Standard model P-212 Deluxe model with glass oven-door, backgoard and oven lights and timer.

ant front and working surfaces. One-piece welded and sealed porcelain lined oven. Castiron life-time burners. Smokeless one-piece broiler, with 4 glide tracks. Robertshaw oven heat control. Size: 453% high, x 201/2 wide, x 25"

> Leslie's and FINEST SOUTH'S FIRST

# **Brass Fittings for Gas and Water Connections**

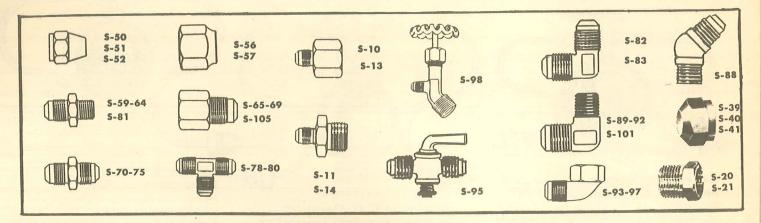

### Flared Tube Nut

### **Reducing Flared Nut**

S-56 3/8" x 1/4" Wt. 3 oz. S-57 1/2" x 3/8" Wt. 4 oz.

## Union—Flared Tube—Male

## Union—Flared Tube—Female Connector

### Union—Flared Both Ends

### Tees—Flared All Ways

s-78 1/4" Wt. 7 oz. s-79 3/8" Wt. 8 oz. s-80 1/2" Wt. 9 oz.

### 45° Elbow-Male Connector

\$-88 3/8" o.d. x 1/4" m.p.t. Wt. 7 oz.

### **Cut-Off Valve**

S-95 3/8" OD tube Wt. 12 oz.

Oil Tank Valve
Heavy body, needle valve type, ground brass
seat oil shut-off cock. 3%" OD tube x 34".

5-98 Wt. 11/4 lbs.

### Flared Union Elbow—Two Way

5-82 3/8" are x 3/8" flare elbow. Wt. 8 oz. 5-83 1/2" flare x 1/2" flare elbow. Wt. 9 oz.

### Flared Tube-Male Elbow

### Flared Tube-Female Elbow

### Water Hose Connections Wt. 5 oz. ea.

S-10 Female connector 3/8" OD tube x 3/4"
S-11 Male connector 3/8" OD tube x 3/4"
S-13 Female connector 1/2" OD tube x 3/4"
Male connector 1/2" OD tube x 3/4"



### Swivel Hose Connection Wt. 7 oz. ea.

S-16 Female connector 3/8" OD tube x 3/4"
S-18 Female connector 1/2" OD tube x 3/4"

### SPECIAL TEES



### FOUR WAY TEE

**S-30** Three-way tee  $\frac{3}{8}$ " o.d. x  $\frac{3}{8}$ " f.p.t. **S-31** Three-way tee  $\frac{3}{8}$ " o.d. x  $\frac{1}{2}$ " f.p.t. **S-34** Four-way tee  $\frac{3}{8}$ " o.d. x  $\frac{3}{8}$ " f.p.t. **S-35** Four-way tee  $\frac{3}{8}$ " o.d. x  $\frac{1}{2}$ " f.p.t.



### COPPER FLARE SEAL BONNET

S-111 3/8" S-112 1/2"



### CAP ORIFICE

5-130

### BUSHING - m.p.t to f.p.t.

**5-20** 1/2" x 3/8" Wt. 2 oz. **5-21** 3/8" x 1/4" Wt. 1 oz.

### FLARED CAP NUT

\$-39 \( \frac{1}{4}\) o.d. \quad \text{Wt. | oz.} \\
\$-40 \( \frac{3}{6}\) o.d. \quad \text{Wt. | oz.} \\
\$-41 \( \frac{1}{2}\) o.d. \quad \text{Wt. | oz.} \\
\text{Wt. | oz.} \quad \text{Wt. | oz.} \\
\text{Vt. | oz.} \quad \quad \quad \text{Vt. | oz.} \quad \quad \quad \quad \text{Vt. | oz.} \quad \



### (ORDER FLARE NUTS SEPARATELY)


THREE - WAY SHUT OFF VALVE 5-110 3/8" o.d. Wt. 1/2 lb

Order S-51 3/8" flare nuts



### P. O. L. with Flare Connection


S-125 P.O.L. x 3/8" flare



TAILPIECE ASSEMBLY
Tailpiece 1/4" I.P.T. with
Standard P.O.L. Nut

S-120 Tailpiece assy. S-121 Tailpiece only S-122 Nut only Wt. 21/2 lbs. Wt. 11/2 lbs. Wt. 11/2 lbs.

### REDUCING TEE - FLARED ALL ENDS




Leslie's

THE SOUTH'S FIRST and FINEST



# Regulators and Accessories



**Heavy-Duty Twin-Tank** Regulator Assembly

Designed for use where more gas is required, and reduces the possibility of high pressure leaks in regulator assembly; regulator body and manifold are made of east zinc, treated to prevent corrosion; assembly includes regulator, throwover manifold, mounting foot screws and two pigtails for connecting to tank valves.

F-53 Wt. 5 lbs. F-58 (M318) FISHER F-56 Y300-1 2-Tank Check Valve


Cross-Tee Manifold

For converting single-tank regulators to two-tank regulator assemblies; fits any regulator with 1/4' female pipe thread inlet.

F-56 Wt. 2 oz.

**POL Spud and Nut** 

For connecting single-tank regulators to tank valve; regulator connection is 1/4" male pipe thread; valve connection, POL thread.

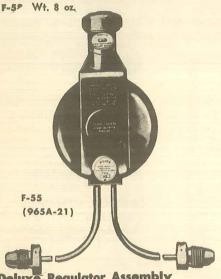

Deluxe Regulator Assembly with Automatic Changeover

Designed to operate installations of two or more tanks; when tank connected to one side of regulator is empty, regulator automatically changes to tank connected to other side and starts drawing gas from it without any interruption in supply of gas to appliances, and without any attention from user; when regulator switches from empty tank to full one, a red flag appears to signal user that one tank is empty.


F-55 Wt. 51/2 lbs.

F-62 (Y200-4) F-54 (1882)

Twin-Tank Assembly with Bracket Low pressure; designed for ease and simplicity in operating a 2-tank installation; draws gas from only I tank at a time, while a tight shutoff is maintained on the other tank without turning the tank valves; when I tank is empty a simple turn of the handle so that it points to the full tank is all that is required to change from one to the other; complete assembly including regulator, throwover manifold, mounting bracket and 2 pigtails for connecting to tank valves.

F-62 Regulator assy.

F-54 (1882) Manifold only



20-in. Copper Pigtail

POL by inverted flare 20" copper pigtail for use with any regulator having 1/4" inverted flare pigtail connections; tank valve connection is POL.

**Twin-Tank Throwover** Regulator Assembly

Includes F-50 regulator coupled with check valve cross tee manifold, two 20" pigtails; check valve in manifold provides for disconnecting an empty tank and replacing it with full one without shutting off flow of gas through regulator; the sec-ond tank provides gas while the empty is filled.


F-52 Regulator assy.

Wt. 3 lbs.

F-52 (Y200-8) F-65 (Y200-3) F-66 (P-102)

F-65 Regulator assy. w/mounting bracket

F-66 Mounting bracket only



### Single-Tank Regulator Assembly for Direct Connection

Small size . . . light weight . . . simple to install . . . large capacity; body is of cast zinc, treated to prevent corrosion; neat and compact in appearance but ruggedly built to give better regulation longer. 1/4" pipe thread inlet by 3/8" pipe thread outlet. Complete with inlet adapter.

F-50 Regulator less adapter.

Regulator with adapter.

Wt. 11/2 lbs.

Regulators and R-85 (1450R)

R-80 (970U)



R-86 (5700S)

R-87 (2302P) R-88 (2302A2)



Regulator Assembly Straight swivel male POL inlet for direct connection to standard cylinder valve-3/4" NPT outlet.

R-87 With spud & nut. R-88 Less spud & nutWt. 2 1/4 lb. Wt. 13/4 lb.

Accessories P.O.L. Spud and Nut to connect regulator to valve. 1/4" male pipe thread and POL thread.

R-80 Wt. 6 oz.

### 2-Tank Check Valve Manifold Outfit

Provide relatively low-cost system for two-tank connection which is dependable and safe. Check valve prevents release of gas while empty cylinder is being disconnected and full cylinder installed.

Manifold valve only. R-85

R-86 Each pigtail only. Wt. 1/2 lb.



R-77 (1421R)


Manual Throwover Valve Manifold

2-tank connection that is economical and safe. Both tank valves may be opened and when the tank in service is empty, level on manifold is easily turned, instantly connecting reserve tank and shutting connection to empty one.

R-77 Wt. 4 oz.

Leslie's **HE SOUTH'S FIRST and FINEST** 

# Gas Tanks, Stands and Valves



### **ICC-Approved Butane-Propane** Tanks with POL and 10% Shut-off Valves

High-strength steel, lightweight construction, with convenient handle and valve guard. 5-gallon (20 lb.) capacity. Size: 12" dia., 20" high. Wt. 21 lbs.

CC-1 With POL and 10% valves. CC-2 With POL valve only.



consists of 2 No. CC-1 tanks with POL and 10% valve, 1 No. TD-2 tank rack and 1 No. F-52 Fisher regulator.
cc-4 consists of 2 No. CC-1 tanks with POL and 10% valve, 1 No. T-56 tank rack and 1 No. F-52 Fisher regulator.
cc-7 consists of 2 No. CC-2 tanks with POL valve only, 1 No. TD-2 tank rack and 1 No. F-52 Fisher regulator.

No. F-52 Fisher regulator.

CC-8 consists of 2 No. CC-2 tanks with POL valve only, I No. T-56 tank rack and I No. F-52 Fisher regulator.



Will accommodate all standard size gas tanks; tension adjusting screws hold both tanks securely in place: easily mounted—no hole drilling; no tools required to remove tank from rack for refilling; adjustable regulator bracket; heavy 14 gauge base with flanged sides for extra stiffness; no welds to break apart; packs flat for easy and low-cost shipping. Fasten base to trailer chassis with "J" bolts. Specify in ordering whether you need 6" (for frames 4 to 6") or 9" (for frames 7 to 9").

TD-1 Single tank rack. Wt. 8 lbs.

TD-2 Double tank rack. Wt. 10 lbs.

"J" Jolts—6". Wt. 3/4 lb. "J" bolts—9".

Wt. 3/4 lb.

### **Tank Holders**

Made perfectly for the tanks 12" in diameter. Indentation of holder at the bottom prevents tanks from rattling when traveling. No drilling frames. Connected by hook bolts.

Single tank holder. Wt. 8 lbs.

Double tank holder. Wt. 17 lbs.

# COPPER TUBING



### Seamless Soft Copper Tubing A high quality copper tubing used for gas or water line.

Wt. per 50 ft. roll approx. 9 lbs.
T-1 Size /4", per foot
T-7 Size /4", per 50 ft. roll
T-2 Size 3%", per foot
T-8 Size 3%", per 60 ft. roll
T-3 Size /2", per foot
T-9 Size /2", per 50 ft. roll

Gasket & Joint Sealing Compound Especially suitable for L-P gas installation. Developed for rapid and easy application. Non-hardening and unaffected by vibration and extremes in temperature.

S-99 4-fluid oz. cans. Wt. 9 oz.

A Good Tool for Good Mechanics At a Very Low Price



### Flaring Tool


Handles seven sizes of tubing from 3/16" to 5/8" for making safe connections to all copper tubing lines. Sizes normally used on trailer installations.

5-45 Wt. 3 lbs.



POL and 10% Shut-off Valves

R-81 BB POL valve 3103CO. \Vt. 2 lbs.
R-82 10% bleeder valve 3165F. Wt. 1/2 lb.
R-83BB POL valve with 10% bleeder valve
No. 3103C4. Wt. 21/2 lbs.



### **Tubing Cutter**

Capacity 1/8" to I" roller block with sharp cutting wheel gives right angle cut without flattening the tubing.

S-46 W+ 3/4 lbs. S-47 Tubing currer wheel



THE SOUTH'S FIRST and FINEST

# Traps, Toilet Fittings, Sewer Connectors, Hose

### Spring-A-Drain Fittings

are finished in gleaming chrome, will never rust; average wt. 11/2 lbs. each.



#2-3M · 2" I.D. Hose x 3" Male Pipe 5D-1 (2-3M)

#212-3M 21/2" I.D. Hose x 3" Male Pipe SD-2 (212-3M)

#3-3M 3" I.D. Hose x 3" Male Pipe SD-3 (3-3M)



#2-3F 2" I.D. Hose x 3" Female Pipe SD-5 (2-3F)

#212-3F 21/2" I.D. Hose x Female Pipe SD-6 (212-3F) SD-7 (3-3F)

#3-3F 3" I.D. Hose x 3" Female Pipe



#2-3ME 2" I.D. Hose x 3" Male Pipe Elbow

#212-3ME 21/2" I.D. Hose x 3" Male Pipe Elbow

#3-3ME 3" I.D. Hose x 3" Male Pipe Elbow SD-10 (2-3ME) SD-11 (212-3ME) SD-12 (3-3ME)





#212-3FF #3-3FF #2-3FE 3" I.D. Hose x 21/2" I.D. Hose x 2" I.D. Hose x 3" Female Pipe 3" Female Pipe 3" Female Pipe Elbow Elbow SD-15 (2-3FE) SD-16 (212-3FE) SD-17 (3-3FE)

### "Aero-Seal" Hose Clamps

For easy, fast installation. Grips hose with just right pressure to make a perfect seal without cutting or crushing hose. Tightens (with notches) the way you do your belt. No loose parts to get lost.

Fits hose 2" to 21/2" I.D., outside 2-1/16" to 3". Wt. 5 oz. Fits hose 3" to 31/4" I.D., outside 2-13/16"







### Flexible Galvanized Steel Hose with asbestos packing.

AT-50 21/4" ID 50-ft. roll AT-51 21/4" ID per ft. AT-55 31/4" ID 50 ft. roll AT-56 31/4" ID per ft.



### Sani-Flex Drain Hose

· Lightweight - 10' length, weighs 4 lbs. Flexible bends to conform to any angle

 Economical — less cost than heavier hose Durable - neoprene liner on inside is tougher and longer lasting than natural rubber

M-325 21/2" ID x 10', per length M-330 3" ID x 10', per length

### Couplings for Connecting 2 or More Drain Hose Wt. 1 Lb.

M-236 Hose coupling for 21/2" hose M-331 Hose coupling for 3" hose

HIGH-IMPACT SHATTER-PROOF PLASTIC DRAINAGE CONNECTORS

ADAPTER



COUPLED **ELBOW** 

M-320

M-321



M-312 M-314

M-316 M-318







M-313 M-315

M-317 M-319

M-310 Elbow sleeve only 21/2" x 21/2"

M-311 Elbow sleeve only 3" x 3"

M-312 Male adapter 21/2" ID x 3" mpt

M-313 Male elbow complete 21/2" ID x 3" mpt

M-314 Male adapter 3" ID x 3" mpt

M-315 Male elbow complete 3" ID x 3" mpt

M-316 Female adapter 21/2" ID x 3" fpt

M-317 Female elbow complete 21/2" ID x 3" fpt

M-318 Female adapter 3" ID x 3" fpt


M-319 Female elbow complete 3" ID x 3" fpt

Note! The complete elbow consists of adapter and elbow sleeve.

CLOSE COUPLED ELBOW (one-piece unit)

M-320 Male elbow 3" ID x 3" mpt

M-321 Female elbow 3" ID x 3" fpt



### SANITARY DRAIN ACCESSORIES FOR MOBILE HOMES

These are the most satisfactory and easiest connected sanitary drain accessories for mobile homes. Fittings are of special semi-hard rubber, pliable for easy installation, strong enough to form a rigid sanitary connection-foolproof and water tight. No tools, tapes, or caulking necessary to install. Typical installation shown above.



TD-33 Plastic elbow to con-nect 3" standard pipe to 3" plastic pipe.



Plastic elbow to con-nect 4" standard pipe to 3" plastic pipe.



TD-34

Plastic bushing, 3" inside diameter, to fit 4" tile.




TD-31 All-weather 3" plastic pipe, 16' length.



TD-36 Coupling to connect two pieces of 3"

plastic pipe.

### Flex-Drain Rubber Sewer Hose



All rubber, wire reinforced; unaffected by sewerage and waste; light weight; non-collapsing. Available in 3" x 10' length only. Wt. 8 lbs. MTS-1 Rubber sewer hose, per length

Leslie's

THE SOUTH'S FIRST

# Toilets, Toilet Parts and Traps

# MANNER MANSFIELD TOILET




Here is a washdown combination with Space-Saving Tank. White vitreous thina with a straight front bowl. The bowl has an extended horn for easy setting and leak-proof connection. The foot of the unit is perfectly level and the four-bolt holes provide a more secure mounting to the floor. There is a greater water surface than found in comparable bowls; the slab set at a steeper angle; and an improved waterway gives more rapid and dependable action. And the tank covers will not rock. Here is a combination that is bound to satisfy.

> Toilet complete with seat MB-1

MB-2

MB-3 MB-4 Seat

### ROUGH-IN DIMENSIONS









### Other Toilet Accessories

Sponge rubber floor gasket

Male flange 3"

MB-12 Female flange 3"

### 3-Way Trap



### THE W-C "TRAILETTE"

Carefully redesigned and constructed to meet the special requirements of trailer coach living and plumbing; special treatment of all metal parts to avoid rusting or staining from condensation; bowl is white vitreous china; new bowl overflow outlet has a molded water trap that prevents leakage of sewer gas; seat and cover are gleaming white; installation space required 181/2" wide by 19" deep.

WC-60 Trailette Toilet. Wt. 381/2 lbs.

### 3-Way Trap

Not only traps the "Trailette" Toilet, but further provides two branch inlets for drainage connection of shower, sink or other fixtures. All waste passes through this one trap and discharges directly into your sewer line.

WC-61 3-Way Trap. Wt. 6 lbs.

WC-97 Set gaskets, Flanges and cap screw for Trailette trap.



### "HANDI-MAN" REPAIR KIT For Trailettes and Toilets of Similar Design

This kit has replacements for parts in the Trailette most subject to normal wear. With it, you can recondition your Trailette base unit and at the same time convert the clapper assembly to the latest up-to-date type.

The kit contains step-by-step instructions for installing parts, and information on how to install the Trailette in detail.

### WC-99 "HANDI-MAN" REPAIR KIT



### **Chemical Toilet of Spun Aluminum** A double receptacle consisting of the "outside"

bowl, or container, and a snug fitting "inner" bucket. Has a Bakelite Seat which is easily removed. 15" diameter at the lid by 16" high.

S-25 Wt. 14 lbs.

### **Natriphene Toilet Chemical**

Carton contains 10 boxes of four tablets each. Four tablets is the proper charge for the standard chemical toilet can of less than five gallons capacity. Fewer tablets may be used in cold weather and more if desired in hot weather. Also used as a household disinfectant, antiseptic and deodorant. Stops many odors but leaves

N-50 Wt. 3/4 lb.

### Designed particularly for Trailer Coaches.



### PARTS FOR ALL TYPES OF WC "TRAILETTES"

Base plug 11/2" WC-40

WC-64 White seat and cover. Wt. 8 lbs.

WC-66 China bowl (specify type No.). Wt. 23 lbs.

WC-68 Clapper spring. Wt. 11/2 oz.

WC-70 Bowl studs, complete with nuts and washers (set of 4). Wt. 3½ oz. Base gasket. Wt. ¼ oz.

WC-71

WC-72 Base mounting screws (set of 4). Wt.

2 oz.

Set of spud washers, friction washer and locknut for water supply pipe assembly (specify type number). Wt. 21/2 oz.

WC-75 Vacuum breaker. Wt. 3/4 lb.

Self-closing supply valve. Wt. 11/4 lbs. Base complete (specify figure No. and if for Fig. 1494 specify for 11/4" or 11/2" pipe). Wt. 12 lbs. Bolts only for W-70 (set of 4). Wt. 21/4 specify for 11/4" or 11/4" WC-76 WC-77

WC-79

21/2 oz. WC-80

Foot pedal. Wt. 1 lb. Link. Wt. 21/2 oz. WC-81

Lever with set screw (specify type WC-82 No.). Wt. 4 oz.

WC-84

WC-87

Supply pipe complete.
Base plug. Wt. 1/4 oz.
11/4" plug for No. 1494 toilet. Wt. 1/4 WC-88

WC-90 Clapper hinge shaft. Wt. 3 oz.

WC-91 Foot pedal stud. Wt. 21/2 oz.

WC-93 Washer only for W-76 supply valve. Set of hinges for Trailette seat and WC-98

### PARTE FOR TYPES 3, 4 AND F

dowl gasket, rubber. Wt 1/4 lb. WC-63

Clapper assembly. Wt. 1/4 lb. Seating ring. Wt. 1/4 lb WC-67 WC-69

WC-78 Clapper arm with taper pin. Wt. 21/2

WC-86 Taper pin only. Wt. I oz.

WC-89 Foot pedal assembly, complete. Wt. I

WC-92 Gasket only for W-67 clapper assembly.

### PARTS FOR TYPE 6

WC-73 Bowl gasket, rubber. Wt. 1/4 oz.

Clapper arm with taper pin. Wt. 21/2 WC-83

WC-85 Clapper only. Wt. 1/4 lb. WC-94 Taper pin only. Wt. I oz.

### Replacement Parts

for McPherson Toilet

MC-5 Set of bearings MC-6 Healthguard Valve MC-7 Diaphragm for Valve MC-8 White seat and cover MC-9 Handle only for

Healthguard Valve

HE SOUTH'S FIRST and FINEST

# Cunningham BATHROOM FIXTURES

### THE JET JUNIOR

No. 30353



Vitreous china. High velocity flushing action is obtained by built-in jet. The new, more efficient reverse trap assures quick, positive flushing with a minimum amount of water. Brass fittings throughout. 22" long and 17" wide at the tank. Exclusive jet flushing action . . . reverse trap-minimum water.

Approved anti-siphon protection against water contamination.

Shock-resistant mounting — improved cover lock and other exclusive features make this unit as efficient as it is beautiful.

(30353) Jet Junior toilet complete CJ-1 (30331) Jet Junior tank complete CJ-2

(30372) Jet Junior tank cover CJ-3

(30329) Jet Junior bowl CJ-4

(30341) Jet Junior seat assembly CJ-5



rubber gasket

CJ-9

CJ-25

CJ-27

CJ-31

CJ-32

CJ-33

CJ-34

CJ-36

CJ-37

CJ-39

CJ-29 (30334)

CJ-35 (30443)

CJ-38 (30446)

CJ-47 (30453)

CJ-48 (30454)

CJ-49 (30455)

(30456)(30457)

30458)

(30461)

(30462)

(30464)

(30465)

(30467)

CJ-60 (30466)

CJ-50

CJ-51

CJ-52

CJ-53

CJ-54

CJ-55

CJ-56

CJ-57

CJ-58

CJ-59

CJ-51

CJ-63

(30441)

(30340)

(30444)

(30445)




30502 ring (female)



30501 ring (male)




30346 manifold








(F) 30469



### THE JET SENIOR

No. 30622



Tank bolted directly to bowl, not attached to wall. Small tank for minimum amount of water. High grade tank fittings, with patented anti-syphon ball cock.

Features large bowl with economy tank.

Exclusive jet flushing action . . . minimum water . . . wash down bowl

Most compact unit made

Finest high-fired vitreous china

### THE JET SENIOR

JET PARTS LIST

(30346-2) Jet drain manifold—11/2"

CJ-8 (30346-4) Jet drain manifold-11/4"

CJ-20 (30330) Jet sponge rubber gasket

CJ-21 (30502) Jet adapter ring (female) CJ-22 (30501) Jet adapter ring (male)

CJ-24 (30437) Jet bowl to floor mtg. assy.

(30438) Jet china bowl caps

CJ-28 (30333) Jet white rubber closet washer

Jet closet screw

Jet ball cock assembly

(30335) Jet round steel washer

Jet float rod

Jet refill tube

CJ-42 (30450) Jet rubber beveled washer for 3/8" intake tubing

CJ-43 (30451) Jet coupling brass washer for 3/8" intake tubing

CJ-44 (30470) Jet rubber beveled washer for 1/2" intake tubing

CJ-45 (30471) Jet coupling brass washer for 1/2" intake tubing

Jet swivel wire

Jet rubber ball

Jet guide screw

Jet overflow tube

(30463) Jet beveled rubber washer

Jet rubber gasket

Jet rubber washer

Jet lift wire

(30459) Jet Valve seat

Jet yoke Jet stud bolt

(30469) Jet stud bolt nut

CJ-64 (30498) Jet hinge assy for seat

(30460) Jet guide

CJ-62 (30468) Jet metal washer

Jet flush handle assembly Jet tank cover lock assembly

Jet flush valve assembly

CJ-46 (30452) Jet coupling nut

(30447) Jet supply tube CJ-40 (30448)) Jet cone washer

Jet link assembly

Jet thumb screws

Jet oval steel closet washer

CJ-26 (30439) Jet open cap closet nut

(30440) Jet closet bolt

CJ-30 (30332) Jet closed closet nut

(30442) Jet float

CJ-41 (30449) Jet lock nut

No. 30622

Jet Senior toilet complete CS-10

CS-11 Jet Senior tank complete


Jet Senior tank cover CS-12

Jet Senior bowl CS-13

CS-14 Jet Senior seat assy.

### ROUGH-IN DIMENSIONS





### "Leader Toilet" Discontinued and Replaced by "Jet Senior Toilet"

There are some replacement parts still available for the "Leader."

**Jet Parts Listed Above Are Also Applicable to Jet Senior Toilet** 

> The BOWL and SEAT replacements are not interchangeable.

Leslie's THE SOUTH'S FIRST and FINEST 30267

COMPLETE

30171

30439 (4)

30193 (4) STEEL 30195 (4)

30630

30202

30200

30276

30183

PURBER

### **BATHROOM FIXTURES**

VACUUM BREAKER

SHUT O

OFF

VALVE

30301

30574

30255

HINGE ASM

30282 (ASM)

30185

30181

0 @ 30201

30192 (4)

30666

30301

30583

30665

30251

30311(5)

### MARINER TOILET

It covers exposed parts at base and presents a clean, even surface that adds a modern touch to the whole room. Makes cleaning much easier.

BASE COVER

CM-10 Base Cover

Wt. 11/2 lbs.

### JET LAVATORY


- Generous washing area for
- Built-in overflow outlet.
- Anti-splash rim.
- Attractive deep skirt.
- Wide shelf with a receptacle for soap and glass.



C-9 Jet Senior Lavatory 15" x 18". Wt. 30 lbs. C-11 Jet Junior Lavatory 12" x 16". Wt. 28 lbs.

BATHTUB TRAP ASSY. C-5 11/4 C-6 11/2"



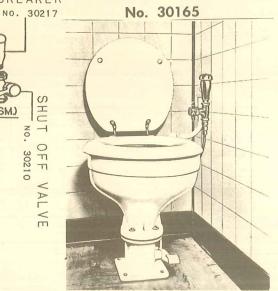

White Vitreous China bowl with built-in overflow. Operates efficiently on both high and low water pressure. Low water usage. Approved Vacuum Breaker is in a one-piece assembly connecting the bowl spud to the self-closing water valve, and is designed to provide proper height above the toilet bowl automatically when it is installed. Base is tapped for 11/2" pipe thread to permit consolidated waste line piping. Floor space of only 19" x accommodates the entire unit. Molded plywood seat will not warp or crack.

> **ROUGH-IN** DIMENSIONS

### PARTS AVAILABLE IN KITS

SPRING CONVERSION KIT NO. 30579 includes (1) 30572, (1) 30573, (1) 30574, (3) 30208, (5) 30311.

BOWL STUD KIT NO. 30634 includes (4) 30192, (4) 30193, (4) 30195, (4) 30439.

### **ASSEMBLIES**

LEVER ARM ASM, NO. 30213A includes (1) 30665, (1) 30672, (1) 30202, (1) 30628-A (1) 30301.

30263 BASE ASM. ONLY INCLUDES all parts shown except 30171 china bowl, 30267 seat asm. and 30308 intake pipe

VALVE REPLACEMENT KIT NO. 30667 includes (1) 30666, (1) 30665, (1) 30630, (1) 30301, (1) 30202.

30628-A

LEVER SHAFT KIT NO. 30677 includes (1) 3C672, (1) 3O628-A, (1) 3O301.

MARINER MASTER REBUILDING KIT NO. 30678 includes (1) 30667, (1) 30677, (1) 30579.


30316 BASE ASM. ONLY INCLUDES all parts shown except 30171 china bowl and 30267 seat asm.

INTAKE PIPE ASM, NO. 30308 includes (1) 30282, (1) 30210, (1) 30217.

30285 FOOT PEDAL ASM. INCLUDES (1) 30278, (1) 30279, (1) 30286, (1) 30287, (1) 30293.

ASM, NO. 30164 INCLUDES ALL PARTS SHOWN.

Order MARINER TOILET and PARTS, also KITS and ASSEMBLIES by manufacturer's NUMBERS, but be sure to include DESCRIPTION of the ITEM you are ordering.

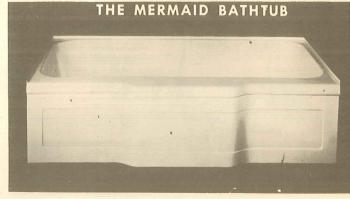

### **CUNNINGHAM Mermaid Bathtubs**

- Drawn 14-gauge steel-no welding; detachable skirt.
- Exclusive center drain; pitched for positive drainage.
- A Handsome, gleaming white porcelain finish.
- C-1 Mermaid tub 12" high, 271/2" wide, 461/2" long C-2 Mermaid tub 12" high, 271/2" wide, 54" long



THE SOUTH'S

|- ||±"-

# MOBILE HOME Tubs, Showers and Fittings



# LAWNDALE

### "Beverly" Tub

Completely modern in design, with sleek, clean line, 1-pc. deep-drawn steel stamping punched for right-hand or lefthand drain. Lustrous white acid-resisting enamel. 461/2" x 27" x 12" full size interior contours.

L-28





### **Lawndale Trailer-Light Lavatory**

Lustrous white acid-resisting enamel over steel. Easy to install, with its own porcelain enamel wall bracket 16" x 131/2" x 6", basin: 131/4" x 83/4" punched for center-set mixing faucet, no overflow. Uses M-212 faucet shown on p. 49, and CR-3 drain

L-22 Lawndale Lavatory Wt. 18 ibs.

### Plastic Lavatories Are Lightweight

Attractive. Of heat-resisting plastic, rustproof, stainless, and chip-proof. In choice of wall, or corner styles. Drain and faucet holes to fit all standard fixtures, (Faucets shown not included in prices.)

Uses M-212 faucet shown on p. 49.



CR-1 Wall-type, Overall size: 14<sup>1</sup>/<sub>4</sub>" x 12<sup>3</sup>/<sub>4</sub>" Size of bowl: 12<sup>1</sup>/<sub>2</sub>" x 7<sup>1</sup>/<sub>4</sub>" x 5" deep. Wt. 2 lbs.





CR-2

### Shower Trap with Side Outlet

With strainer for limited space with a side outlet for I" pipe, Iron body, 23/4" overall height. 41/4" dia. Removable strainer plate permits cleanout.

CENTER OUTLET

SHOWER TRAP

CE-21 Wt. 4 lbs.

SIDE OUTLET

SHOWER TRAP

### Shower Trap with Center Outlet

With strainer for confined space where I" pipe drain goes directly through floor. Iron body. 21/4" overall height. 41/4" dia, Removable strainer plate and bell casting permits cleanout.

CE-22 Wt. 31/4 lbs.


### Square Shower Base

H-140 Medicine cabinet Wt. 6 lbs.

H-141 Mirror only


Baked-on crinkle finish in black, 3 inches deep; top edge grooved to take tile board. Stock sizes shown below, but can be made special to order in other sizes. Wt. approximately 15 lbs.

Size 28" x 28" Size 30" x 30" T-77 Size 32' x 32"



Corner type, Over-all size: 14" x 1534" Size of bowl: CR-2 12" x 9" x 5" deep. Wt. 2 lbs.

CR-3 CO drain. Wt. lb.

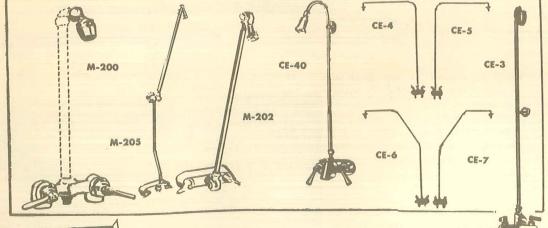

### Lav-O-Shower

Combination ledge type lavatory fixture and shower with automatic diverter. Mount on lavatory only. Rigid, ball joint shower head set for 28" shower stall. Specifications: ledge mounting with 4" centers: 1/2" pipe thread on spud; 3/8" o.d. tube slip nut connection provided but can also use 1/2" o.d. tube or 1/2" pipe; 40" overall height; offset shower heads can be furnished 24" to either right or left. Wt. 8 lbs.

CE-3 Upright

Square, left hand CE-4

CE-5 Square, right hand

Angle, left hand

CE-7

Angle, right hand Faucet assembly CE-8

with diverter

TUBULAR TRAPS

CE-31 **CE-32** 

11/4" "S" Trap 11/2" Continuous Waste **CE-38** CE-39

**EXTENSION TUBES** 

11/4" CE-36 **CE-37** 

### **Shower Stall Fixture**

Concealed type unit with supply line provision for top or bottom of valves. Supply on 4" center for 1/2" pipe. Shower head with ball joint, 1/2" IPS connection, chrome plated. Wt. 1/2 lb.

### Adjusto Shower Fixture and **Tub Filler**

Adjustable height, shampoo hair, bathe children, to fill tub, take a shower. Connection for supply is standard 1/2" IPS female union on 6" centers. Jewel chrome finish.

Complete M-200 Wt. 5 lbs.

M-201 Shower head only M-203 Shower head' with swivel top attach-ment only, for

M-202. M-204 Shower head with swivel top attach- CE-41 Faucet assembly with diverter ment only, for M-205.

With joint. Wt. 10 lbs.

### Switch-Flow Shower

A wall-mounting type automatic shower fixture. Flow re-diverts to lavatory when water is turned off. Mounts through wall on 3%" centers—¾" pipe thread on spuds. 39" riser.

CE-40 Wt. lbs.


Leslie's THE SOUTH'S FIRST and FINEST

# ELECTRIC WATER HEATERS

# Models 126-210 212-320

# Payne Automatic Electric Water Heaters





MFGRS. MODEL NO.	GALLON CAPACITY	WATTS	VOLTS	SIZE IN INCHES	WT.	OUR STOCK NO. W/GALVANIZED TANK	OUR STOCK NO W/GLASS LINED TANK
123	31/2	750	115	12 SQ x 13 H	30	P-2	PGL-2
126	61/2	1000	115	12 SQ x 22 H	41	P-3	PGL-3
136	6	1000	115	13 SQ x 141/2 H	39	P-4	PGL-4
210	71/2	1000	115	13 SQ x 19 H	50	P-5	PGL-5
212	12	1000	115	13 SQ x 27 H	61	P-6	PGL-6
320	20	1500	115	13 SQ x 41 H	98	P-7	PGL-7
312	12	1000	115	HORIZONTAL			
				13 SQ x 27 L	61	P-9	PGL-9
412	FAST	1000	115	HORIZONTAL			
	RECOVERY	2000		13 SQ x 27 L	61	P-10	PGL-10

# SPEED . MATIC

Electric Water Heater



### **Automatic Electric Water Heaters**

Convenient and dependable. Always hot water when you turn the tap. Designed to reduce use of electricity, and lower operating costs. 1,000 watts. 110/120 volts.

Gal. High Dia. Wt. Lbs.

	Gai.	riigii	Dia.	1111
SP-1	6	161/2"	141/2	40
SP-2	10	171/2"	163/4	50
SP-3	12	183/4"	183/4	70
SP-4	12	27"	141/2	60
SP-17	17	233/4"	183/4	" 80
SP-20	20	26"	183/4	90
SP-21	20	31"	163/4	80

# DUO-THERM



### **Duo-Therm 12-gallon Automatic Electric Water Heater**

Hot-dipped galvanized boiler tank, Fibre-glass blanket of insulation. Band-type heating element for long life. On-off switch and extra convenience outlet. Automatic temperature control. Gleaming white baked enamel finish. Operates on 115 volts. 201/4" tall and 18" dia.

DT-50 Wt. 61 lbs.

WH-111 Water heater bulb

### BLUE-FIRED GLASS LINED WATER HEATERS

Unconditionally guaranteed for 5 years against leaking tank. Single break-snap action-simple indexed pointer thermostat; double insulation with asbestos and fiberglass; heavy duty heating element; equipped with magnesium rod; concave bottom with self cleaning heating surface; self draining prevents accidental freezing of tank.

### GALVANIZED WATER HEATERS

Double-break snap action pointer thermostat; heavy steel zinc dip galvanized tank; dual cutout thermostat protects against power failure; nylon stops for protection from electrolysis.

### **Duoble Element Water Heater**

Fast Recovery Electric Water Heater-320 or MODEL 412 More Gallons a Day

This NEW water heater is two heaters in one. In normal operation only one heating unit is used and the heater performs as a standard automatic electric Payne water heater. When you want lots of hot water you simply flick a handy switch and the second heating element goes to work. For plenty of hot water all the time, just leave both heating elements in operation. This gives you twice as much hot water as a standard model, at no extra cost.

### Parts for Electric Water Heaters

When ordering be sure to give model number and size.

### Bantam

BT-1 Thermostat BT-10 10" band element 600W-3 gal. BT-12 12" band element 1000W-6 gal. BT-14 14" band element 1000W-12,20 gal. BT-18 18" band element 1500W-B220,20 gal. Wts. I to 2 lbs.

### Bowen

Wt. 3 lbs. BN-10 Disc element BN-11 Therm-O-Disc thermostat Wt. I lb. Wt. 3 lbs. BN-15 Glow coil for gas heater

### **Duo-Therm**

Wt. 11/2 lbs. DT-51 Band element

### Modern

Wt. 11/2 lbs. Wt. 11/2 lbs. Wt. 1/2 lbs. MN-10 10" band element MN-12 12" band element MN-15 Thermostat

### Payne

P-11 Thermodisc P-12 Immersion element 1000W for 023, 026, 036, 112 heaters P-14 Immersion element 1500W-320 heater P-16 Disc element for 136, 210, 212, 312, 412

P-17 Disc element for 113, 016, 123, 126

Wts. on elements 3 lbs. P-19 Camstat thermostat Wt. I lb.

Wt. 1/2 lb. P-20 Relief valve (see p. 52)

### Speed-O-Matic

SP-5 Open coil element for heaters made 1954 and later Wt. 3 lbs. SP-6 Immersion element for heaters made prior Wt. 3 lbs. Wt. 1 lb. to 1954 SP-7 Thermostat SP-40 Relief valve (see p. 52) Wt. 1/2 lb.


SP-41 Water heater switch



Bargman

# **Mobile Home Sinks and Fittings**



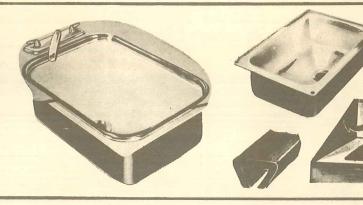

# E-Z Drain Sinks— Single and Double

Single sink weighs 5 lbs. Single moulding weighs 1 lb.

Single sink 121/2" x 18" x 6" deep with 2"


drain opening, less moulding Single sink with moulding

B-76

Single moulding only
Two sinks complete with moulding
Moulding complete for two sinks B-77

B-78

B-79 Center moulding only



**Universal Strainer Adapter** 

The No. SA-95 makes possible the attachment of single and double "Siphon" Traps to every make of sink. Made of solid cast metal; this ingenious fitting is adaptable to the standard 11/2" x 111/2" threaded strainers at top. It can be fitted to 1/8" flared copper tubing at bottom.

B-100 Strainer Adapter B-101 Adapter body

Adapter slip nut B-102 B-103 Adapter washer

### **Bronzline Water Hose**

Not affected by freezing. May be buried underground. Non-toxic — Safe — Tasteless.. 400 lbs. P.S.I. burst pressure. May be wrapped with heat tape in winter to prevent freezing. Light weight. Solid brass fittings.

GUARANTEED SATISFACTION Wt. 11/4 lbs. M-300

Unless specified whether 4 or 8 hole sink required, 8 hole Bargman sink will be shipped.

Complete with aluminum moulding Deluxe models. Built of high-quality steel, finished in gleaming white porcelain enamel, triple coated for lasting beauty. E-Z drain sloping bottom (exclusive with Bargman), rounded corners for easier cleaning. Specially designed aluminum moulding for added beauty and sanitation.

BP-10 Single sink 15 1/8" x 17 1/8" x 7" deep, 3 3/4" drain opening, less moulding

RP. 12 Single sink with moulding BP-13 Single sink moulding only

BP-14 Two sinks complete with moulding

**BP-15** Moulding complete for two sinks

Center moulding only BP-16

### **Siphon Trap Assemblies**

For Single E-Z Sink. 78" copper elbow (can be cut to any length desired). Cup pressure nut, 3 compressor nuts with rubber seals and one trap body, 7/8" copper or I" iron pipe (not included) can be used from bottom.

B-80 Wt. 11/2 lbs.

For Double E-Z Sink. Two 1/8" copper elbows (can be cut to any length required), 2 cup pressure nuts, 3 compressor nuts with rubber seals, one trap body, for 7/8" copper or 1" iron pipe (not included) can be used from bottom.

B-81 Wt. 21/4 lbs.

### **Replacement Parts for Siphon Traps**

B-82 Siphon trap cover B-83 Siphon trap cover gasket

B-84 Siphon trap body BP-85 Siphon trap 7/8" tubing BP-86

Siphon trap pressure nut BP-87 Slip nut

BP-88 Pressure nut gasket

BP-89 Siphon trap slip nut gasket





**Rocker Water Pump** 


Hand operated with short easy back and forth strokes. Fits anywhere on drain board. Swivel spout serves both single and double kitchen sinks. Solid brass throughout, exposed parts chrome plated. Self priming valve chamber assures instant flow of water.

B-25 Wt. 3 lbs.

### **Rubber Moulding**

Provides water-tight seal around sinks and drainboards. No waste, as odd pieces can be mitered together. Available in 5-foot lengths only.

B-19



### Black Magic Polyethylene Water Line

High pressure (400 PSI)

Tasteless, odorless, freezing will not injure hose


25-ft. length complete with adapters

 Guaranteed satisfaction CA-1

Wt. 11/4 lbs.

Leslie's THE SOUTH'S FIRST and FINEST


# Sinks, Faucets




Lawndale "Belmont" Double Sink

Lustrous white acid-resisting percelain enamel over steel. Generous size: 18 x 32 x 7". 31/2" openings for dual strainers, centered.

L-25 Wt. 32 lbs.

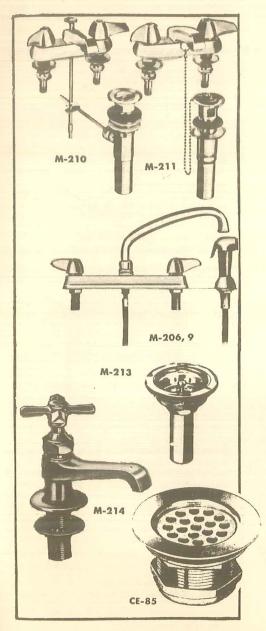



Stainless steel frame to fit the L-25 Lawndale 'Belmont" double sink.

WL-25

Wt. 2 lbs.

### **Faucet Washers**

Assorted sizes for every need. Molded neoprene rubber; for hot or cold water. Packed complete with bibb screws.

W-273 Faucet washers, per box

**Lavatory Fixtures** 

High quality, smartly styled single-stream lava-tory fixtures with spouts raised 1%" above slab. Will fit any lavatory with 4" center drilling through slab.

M-210 With pop-up waste. Wt. 51/4 lbs.
M-211 With P.O. plug, chain and stopper, Wt.

31/2 lbs. M-212 Less P.O. plug, chain and stopper. Wt.

2¾ lbs. M-221 P.O. Plug

M-222 Washer only

**Swing-Type Sink Faucets** 

Concealed deck type swing-spout sink faucets, with 8" centers, renewable seats, with drawn brass spout. Wt. 41/2 lbs.

M-206 With spray

M-207 With spray and aerator

M-208 Less spray

M-209 Less spray with aerator

**Basket Type Sink Strainer** 

Brass-chrome plated, With stainless steel basket. 11/4" x 4". 22-gauge tailpiece.

M-213 Wt. 13/4 lbs.

M-220 Crumb cup only

**Lavatory Faucet** with Cross Handle


M-214 Wt. 11/2 lbs.

Sink strainer with 3" flange diameter—to fit 21/2" opening. Removable strainer plate.

No. CE-85

Wt. 2 lbs.

CE-91 Slip nut 11/2" with washer



Super Seal Sink Strainer

Solid brass forged body . . . chrome plated for a lasting finish. Available with or without tailpiece to fit pipe, hose or tubing connections. Removable crumb cup provides good seal when closed. For sinks with 2" drain opening. Wt. lb.

B-29 Complete for 11/4" to 11/2" pipe B-22 Complete for 5/8" hose or 7/8" tubing


B-23 Crumb cup only



Chrome **Filler Spout** 

Combination water intake fitting with sealing cover for filling of water tank with hose or pail. Made of cast white metal, Chrome plated. No funnel needed—tanks filled easily with hose or pail. Fits closely to trailer body.

B-28 Wt. 3/4 lbs.



City Water Intake Fittings

Made of iron pipe nipple, 6" long, with flat end, cast flange and standard female hose connection, complete with aluminum cap and chain. (End of nipple threaded to take sta Jard flare fitting).

B-24 for 3/8" tubing
B-104 for 1/2" tubing chamfered to receive pressure fitting

B-106 tor 3/8" tubing chamfered to receive pressure fitting

**City Water Intake Fittings** 

A simple intake fitting, includes aluminum cap held by chain; standard female hose connection; pres -fitted flange for mounting, and 5/8" x 18 threaded tailpiece for flare connection to copper tubing.

B-108 for 3/8" tubing

Pressure Fittings

B-118 for 3/8" pipe B-119 for 1/2" pipe

SOUTH'S FIRST and

# Keep MOBILE HOME Bright and Shining



### Leslie's Roofalume

Trailer roofing-a liquefied aluminum insulator. A combination of aluminum, waterproofing oils, asbestos and a rubber-like base.

Will reduce interior temperature from 12 to 15 degrees due to its aluminum surface which acts as a light and heat reflector.

Guaranteed to waterproof and weatherproof for three years. Will not crack, peel or blister. It forms a solid sheet of flexible aluminum over every pore in the trailer roof. Will expand and contract with roof movement.

One gallon will cover 80 to 110 square feet of

root su	rtace.			
RL-1	One-gallon can	Wt.		
RL-2	Two-gallon can	Wt.		
RL-3	Three-gallon can	Wt.	30	lbs.
RL-5	Five-gallon can	Wt.	50	lbs.
RL-55	Fifty-five gallon drum	Wt.	550	lbs.



### Trailer Roofing—A Liquified **Aluminum Insulator**

Combination of pure flake aluminum, waterproofing oils, asbestos and a rubber-like base makes KOOL-SEAL the most outstanding contribution to trailer living-comfort.

Will reduce interior temperatures from 12 to 15 degrees due to its aluminum surface which acts as a light and heat reflector.

Guaranteed to waterproof and weatherproof for three years. Will not crack, peel or blister. It forms a solid sheet of flexible aluminum over every pore in the trailer roof. Will expand and contract with roof movement.

One gallon will cover 80 to 110 square feet of roof surface. Brush included free of charge with one gallon kit.

Quart. Wt. 31/4 lbs. Gallon. Wt. 101/2 lbs. E-90 E-91 Two gallons. Wt. 21 lbs. Three-gallon kit Wt. 32 lbs. E-93 Five-gallon kit Wt. 54 lbs.



On Leslie's Roofalume and/or Kool-Seal, Orders for 30 Gallons or More Will Be Shipped "Prepaid" from the Factory in Cleveland, Ohio.



Plasticel Caulking in Tubes for light caulking. Won't crack or shrink. Can be painted over. Aluminum, 5 oz. tube.

E-100 Wt. 3/4 lb.



Spray Aluminum Very bright aluminum color; dries instantiy, In white enameled spray bomb can.

E-140 Wt. 2 lbs.



Membrane; a close weave asphalt impregnated cloth to be used in conjunction with SPECIAL ADHESIVE.

E-130 6" wide by 150' long. Per roll Cut to order (6"). Per foot E-132 12" wide by 150' long.

Per roll E-133 Cut to order (12"). Per foot



Pistol Grade Plasticel Aluminum used in oilers to effectively and permanently seal joints, seams, window and door moldings and frames, etc. Permanently elastic, can be painted over with any type paint or blends well

with bare aluminum surfaces. E-101 Dispenser with

caulking. Wt. 1½ lbs. 1½-pint can. Wt. 1½ lbs. Pint can. Wt. 2¼ lbs. Quart can. Wt. 4½ lbs.

E-104

E-105

Gallon can. Wt. 12 lbs. Plasticel aluminum, spouted cartridge E-106 E-107

Wt. 11/2 lbs.

E-103

E-109 Oiler only. Wt. I lb.

**Electrogrip Rubber Cement** 

For patching awnings; also under rubber strip for weatherstripping.

E-110 2-oz. tube. Wt. 3/4 lb.
E-111 I-lb. tube. Wt. I lbp
E-112 Pint can. Wt. 21/4 lbs.
E-113 Quart can. Wt. 41/2 lbs.
E-114 Gallon can. Wt. 161/4 lbs.



Special Adhesive, a black liquid bonding cement for patching roofs. Very strong in ad-hesive qualities; used to hold membrane in place when patching a crack, loose or torn material, seams, or over nails in a roof that are working loose; applied with ordinary brush onto bad surface and the membrane is applied directly into it; work adhesive over edges of membrane as that is to be covered.

E-120 Pint. Wt. 2 lbs.

Quart. Wt. 3 lbs. Gallon. Wt. 10 lbs. E-121

E-122 5 Gallons. Wt. 46 lbs. E-123

Leslie's THE SOUTH'S FIRST and FINEST




Tuck Quality Caulking, guaranteed for body caulking and sealing jobs. Meets federal specifications on government jobs. Natural only.

Cartridge. Wt. 1/2 lb. Spouted cartridge. Wt. 1 lb. E-81 E-82

Quart can. Wt. 3½ lbs. Gallon can. Wt. 12 lbs. 5-gallon steel pail. E-84

E-85 Wt. 47 lbs.

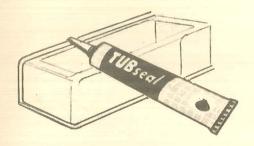

### Tub-Seal

Easy to handle, long lasting rubber base sealer. Use around tub, sink or shower stall; perfect for ceramic tile. Does not become brittle. Completely waterproof.

E-70 41/2 oz. tube. Wt. 1/2 lb.



### **Weatherstrip Cement**

A black cement for attaching rubber weather strips to windshields, windows, ventilators, truck lids and doors, also for cementing rubber mats.

E-75 Wt. 1 lb.

### Preservo for Canvas

Waterproofs canvas and leaves the fabric soft and pliable.

BA-50 gal. Wt. 71/2 lbs. BA-51 qt. Wt. 11/4 lbs.



**TEN-X Sealing Compound** 

Heavy bodied, weatherproof for sealing dry mouldings, windows, windshields and front shields, sponge rubber strips, welded seams, etc.

E-50	Black, 5 oz. tube	Wt. 1/2	lb.
E-51	Aluminum, 5 oz. tube	Wt. 1/2	lb.
E-52	Clear, 5 oz. tube	Wt. 1/2	lb.
E-53	Aluminum, pint can	Wt. 11/4	lbs.
E-54	Clear, pint can	Wt. 11/4	lbs.
E-55	Black, pint can	Wt. 11/4	lbs.
E-57	Black, quart can	Wt. 21/4	lbs.
E-61	Aluminum, quart can	Wt. 21/4	
E-62	Clear, quart can	Wt. 21/4	lbs.
E-63	Black, 1/2 gallon can	Wt. 6	lbs.
E-64	Aluminum, 1/2 gallon can	Wt. 6	lbs.
E-65	Clear, 1/2 gallon can	Wt. 6	lbs.
E-67	Black, gallon can	Wt. 9	lbs.
E-68	Aluminum, gallon can	Wt. 9	lbs.
E-69	Clear, gallon can	Wt. 9	lbs.

Midget Tube Clear TEN-X will completely seal an automobile windshield and rear window. E-80 Wt. 1/2 lb.

### Admiral Caulkina



An airtight, waterproof, elastic filler. Will not harden, crack, or leave sides of seams. Can be painted over and will not bleed through paint. For window glazing, wood or steel sash; sealing around doors, window frames, cracks in cement, auto bodies and trailers.

Half pint. Wt. 11/2 lbs. Pint. Wt. 2 lbs.

1-2

1-3 Quart. Wt. 31/2 lbs.

Gallon: Wt. 12 lbs.

### **Aluminum Paint**

Chrome Finish ready mixed aluminum paint. Heat proof-Rust proof-Weather proof.

1-36 Pint. Wt. 2 lbs.

1-37 Quart. Wt. 3 lbs.

1-38 Gallon. Wt. 91/2 lbs.





"909" Caulking Compound

Adheres to all surfaces. Will not dry out, shrink, or crack. Stops moisture. Remains flexible. Scientifically developed aluminum sealing and caulking compound for windows, doors, seams, mouldings, ventilators.

K-3 Half pint can. Wt. 11/4 lbs. K-4 Pint can. Wt. 21/4 lbs. K-5 Quart can. Wt. 31/2 lbs.

Gallon can . Wt. 11 lbs.

Plastic dispenser with 8 oz. "909" caulking. Wt. 1 lb.

> "STORMY WEATHER" **Lasting Protection Against** WEATHER and MILDEW



The "dry" water repellent that does not stiffen canvas; easy to use; coverage averages 100 to 120 sq. ft. per gallon—varying according to condition of fabric; from 6% to 20% is added to the tensile strength of canvas thread when treated with "Stormy Weather."

SW-1 One-gallon can

Wt. 8 lbs.

Leslie's THE SOUTH'S FIRST and FINEST

# FROZEN WATER PIPES

ADJUSTAT

EASY-HEAT Complete EASY-HEAT Kits-easily installed without tools, provide safe, winter-long protection against freezing! All models connected to UL-approved lead wire and molded plug for any A.C. or D.C. 110 or




120-volt outlet. AUTOMATIC Heat Tape— THERMOSTAT built in!

Model Number	Length of Unit
EZ-A3	3′
EZ-A6	6′
EZ-A12	12'
EZ-A18	18'
EZ-A24	24'

Regular Heat Tape

Model Saves electricity-EZ-B3 operates only when pipes approach freez-EZ-B6 ing. Wire sewn on EZ-B12 insulating tape. Includes outer wrap. EZ-B18 EZ-B24





Model Number	Approx. Pipe Length Protected
EZ-C3	up to 3'
EZ-C6	3' to 6'
EZ-C12	6' to 12'
EZ-C18	12' to 18'
EZ-C24	18' to 24'
	-



Cable

packaged with wrapping-to keep water and asta lines from freezing. Fasy to install.

	es from freezing. Easy to ilistall.
LT-3	(LHT3K) protects up to 3' of pipe
LT-6	LHT6K) protects up to 6' of pipe
LT-12	(LHT12K) protects upto 12' of pipe
LT-20	(LHT20K) protects up to 20' of pipe
	(LHT30K) protects up to 30' of pipe
LT-40	(W1-20) insulation—20' roll
LT-41	(GW1-25) 2-20' rolls insulation with 1-
	25' roll fiberglas blanket,

(TSA1035) Adjustat, adjusted tempera LT-46 ture control



The same basic model as the Automatic, except without

Thermosta	
Model Number	Length of Unit
EZ-3	3′
EZ-6	6'
EZ-12	12'
EZ-18	18′
EZ-24	24'

### ACCESSORIES


Z-30	(EZ-T)	Automatic thermestat
EZ-31	(EZ-P)	Complete insulating package
EZ-32	EZ-G	25' of 3" fiberglas

### Switch-&-Outlet for Water Heater Outlet for plugging in water heaters with toggletype on-off switch, complete with mounting box Pilot light.

H-100 Water heater switch. H-101 Glo-Lite only.



P-20 Relief Valve





For temperature and pressure protection. Pressure control-range 50-200 PSI. Special alloy plug assuring positive protection against temperatures in excess of 210° F. 3%" IPS male inlet and 3%" IPS female drain outlet.

WH-111 Water heater bulb



Wrap-On Cable





S-112) 26' to 52'

(L-220) 52' to 100'

NF-21 NF-22 T-6) 6'

NF-23 T-9) 9' NF-24 NF-25

A-6) under 3' B-12) 3' to 6' M-26) 6' to 12' NF-10 FAM thermostat P-40) 12' to 18' J-56) 18' to 26'

NF-14 Wrap-on insulation

### Tiny Electric Water Heater

Simply immerse in water and plug in for instantaneous hot water. Operates on 110-120 volt AC or DC current.

L-10 Wt. 3/4 lb.



# THE SOUTH'S FIRST and FINEST

NF-2

NF-3


NF-4

NF-5

NF-6

# **DUO-THERM** Roof Mounted Air Conditioner

To Make Mobile Homes More Liveable—Cools—Filters
—Dehumidifies—Circulates—Ventilates—Exhausts—

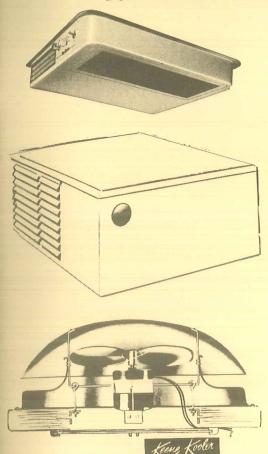

COMPACT—Takes no living space, no ducts: extends 3" below ceiling, 15" above roof.

ROOF MOUNTED—To beat heat at its source; cool air flows downward, warm inside air removed with aid of natural circulation.

moved with aid of natural circulation.
BIG PERMANENT TYPE FILTER—Leaves air
dust-free, pollen-free, dehumidified.

CONVENIENT ON-OFF CONTROL—Has 4 positions for low or high-speed cooling or ventilating; limit switch prevents "overcooling"; provides up to 11 changes of air an hour; used as ventilator to remove stale air, cooking odors. COMPRESSOR—Hermatically sealed in oil for lifetime lubrication; refrigerant system warranted for 5 years; powered by 2-speed direct driven motor; full 10" 4-bladed fan. DIMENSIONS: 251/2" wide, 31" long, 141/2" high.

DIMENSIONS: 25<sup>1</sup>/<sub>2</sub>" wide, 31" long, 14<sup>1</sup>/<sub>2</sub>" high.

DT-57 (100-A-8) 1-ton Special, 9,000 BTU, 115

volt Wt. 207 lbs.

DT-58 (100-8) 1-ton Deluxe, 11,000 BTU, 230 Volt Wt. 212 lbs.

DT-59 (150-8) 11/2-ton, 13,500 BTU, 230 volt, Wt. 217 lbs.

### Keene Kooler

Fits over 12" x 16" or 14" x 14" ventilators; outside mounting flange 241/4" overall; outside dome diameter 2" x 8" high; 110 volt motor with oil sealed bearings; 14" fan with adjustable speeds; airflow capacity approx. 1550 CFM at high speed; inside garnish for controlled air flow; leakproof ventilation combined with quiet operation assures continuous flow of healthful air without disturbing noise; smoke, heating fumes, cooking odors and other odors removed immediately . . . in all kinds of weather; simple installation.

K-25 Wt. 24 lbs. K-26 Switch for Keene Kooler



## Air Conditioner

These units filter, cool, dehumidify and circulate air to dispel heat, discomfort, dust and noise problems of hot weather. Air circulated with fan alone, or thermostatically controlled. Adjustable louvres on front of unit permit the discharge of air in desired direction. Clean air is assured by a permanent type aluminum filter that washes clean in water. Operates on 115 volt. Mounts on floor over a 13 x 15 hole. Ratings according to ARI standard #110-56, Both models measure 15" wide, 291/4" deep and 293/4" high.


3/4-horsepower, 8100 BTU, uses 15 ampere branch circuit, 115 volt.

C-75 Three-quarter horsepower

I-horsepower, 9700 BTU, uses single outlet 20 ampere branch circuit, 115 volt.

C-76 One horsepower


### L-B TRAILER EXHAUST FAN



Silent in operation; easily installed with 4 screws furnished; fits over any porthole not exceeding 6" in diameter; can be permanently fixed over ventilating pipe above stove without interfering with screen or slide closer; size approximately 5" across; 110 volts A.C.

LB-1 (1759

Wt. 21/2 lbs.

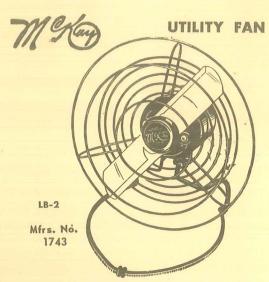

Folds into itself. 8" propeller type blade, quiet motor; 110 volt A.C.; hangs on wall, stands on table, tips to any angle.

LB-2 (1743)

### LB Heat Circulating and Ventilating Fan

Mfrs. No.



This fan has special motor strong enough to circulate warm air, yet slow enough not to create drafts; may be used over stove as illustrated, or to direct heat to cold spots; adjustable to any direction; silent operation, easy installation; 5" blades; 110 volt A.C.

LB-3 (1762)



THE SOUTH'S FIRST and FINEST

# Look to Leslie's

for everything from a part of a part to a complete . . . .

# Lesliline Parts Department



Our package units put you, the Dealer, in the "Parts" business in less than one hour. The cabinet is one uniform size for our "Junior" package and "Senior" package. Dimensions are: 4 feet wide by 6 feet, 9 inches high, and 24 inches deep; with approximately 36 cubic feet of storage space... ample display space... and a serving counter. Install a "Lesliline Parts Department" and watch parts sales increase!

A LESLILINE PARTS DEPARTMENT incorporates the best elements of modern merchandising

- \* An effective point-of-sale ADVERTISING medium.
- \* An attractive DISPLAY unit that stimulates impulse buying.
- \* An incentive to greater PERSONAL SELLING EFFORTS by your sales staff.

Each "LESLILINE PARTS DEPARTMENT" is a self contained, easy to set up stock department that will increase your dollar volume at low investment cost and bring in new customers and prospects by rendering the most needed service in the mobile home industry today — readily accessible parts, accessories and supplies for the repair, maintenance and improvement of the individual mobile home.

For full information about the **LESLILINE PARTS DEPARTMENT** that will best fit into. your operation write to Dealer Merchandising Department, Leslie Mobilehome Supplies, 1920 Stewart Ave., S. W., Atlanta 15, Georgia.

Leslie MOBILEHOME SUPPLIES

# Leslie MOBILEHOME SUPPLIES

1920 STEWART AVENUE, S. W.

ATLANTA 15, GEORGIA

Office Telephones: POplar 6-3666 and 7

Nights and Sundays: TRinity 2-3733 — TRinity 4-1216

### **Retail Price List**

Catalog No. 11

ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE

10% HANDLING CHARGE ON ALL ACCOMMODATION RETURNS FOR EXCHANGE OR CREDIT.

Page No. STOCK NO. LIST	Page No. STOCK NO.	LIST	Page No. STOCK NO.	LIST
1 AC-1 (GD-2114DP-2) 97.25	4 B-24 4 B-25	26.95	5 N-30 (491), pair	43.20
1 AC-2 (GB-2211DP) 141.75 1 AC-3 (GB-2211DP-2) 151.80	4 B-26	26.95 26.95	5 N-31 (492), each	2.30
1 AC-4 (GB-3312DP-2) 175.85 1 AC-5 (F-2000) 43.80	4 B-27 4 B-31	26.95 32.95	5 T-40, set of 4	16.95
1 AC-6 (D-2016P-2) 71.75 1 AC-7 (P26-K) 15.80	4 B-32 4 B-33	32.95 26.95		
1 AC-8 (P36-K) 22.20 1 AC-9 (TIK) 8.45	4 B-36 4 B-38	26.95 32.95	5 T-41, each 5 TD-15, set of 4	4.75 17.95
1 AC-10 (SR-2010-2) 108 15 1 AC-11 (SR-2010P-2) 122 50	4 B-40 4 B-43 (See also A-43)	29.75 21.50	5 TD-16, each 6 A-1 (97)	4.95 15.10
1 AC-20 (550) 3.15 1 AC-21 (555) 4.65	4 B-44 4 B-48	29.75 29.75	6 A-2 (97)	9.60
1 AC-22 (556) 5.35 2 EL-1 (D) 81.50	4 B-49 4 B-50	29.75 29.75	6 A-3	. 60
2 EL-2 (B) 62.50 2 EL-3 6.25	4 B-51 4 B-52	29.75 29.75	6 A-4 (925)	11.75
2 EL-4 6.25 2 EL-5 (DC) 87.50	4 B-53 4 B-60	29.75 26.95	6 A-5 (625)	15.75
2 EL-8 (D) 91.50 2 EL-9 (B) 69.50	4 B-61 4 B-62	26.95 26.95	6 A-13	2.10
2 EL-10 7.50 2 EL-11 7.00	4 B-63 4 B-64	29.75 29.75	6 A-Í4	
2 EL-12 7.00 2 EL-14 23.50	4 B-65 4 C-7	29.75 17.50	6 A-16	3.75 3.75
2 EL-15 23.50	4 C-8 4 C-9	15.75 17.50	6 A-20 (711)	6.75
2 EL-17 9.50	4 C-11 4 C-12	17.50 18.50	6 A-21	.10
2 EL-26 22.50 2 EL-27 22.50	4 C-13 4 C-17	17.50 13.50	6 A-22	.20
2 EL-28 9.50 2 EL-29 9.50	4 C-18 4 C-19	17.50 13.50	6 A-25 (914)	10.50
2 EL-40 137.50 2 EM-5 114.95	4 A-100 HD 4 B-13 HD	24.95 32.95	6 A-29	10.95
2 G-10 132.50 2 G-11 89.50	4 B-14 HD 4 B-15 HD	32.95 32.95	6 A-30 (378)	4.25
2 T-21 79.00	4 B-16 HD 4 B-17 HD	30.95 32.95	6 A-31 (379)	4.25
2 T-22 2 T-28 (410 P & C) 11.00 .40	4 B-19 HD 4 B-20 HD	32.95 30.95	6 A-32 (801)	5.25
2 T-29 (534 R & X) 18.00 2 WW-1 159.50	4 AL-24, each	2.35	6 A-34	.17
3 AB-1 129.50	4 AL-25, each	2.00	6 A-35 (420 & 720)	23.70
3 AB-5 84.50	4 AL-26	2.50	6 A-36	3.50
3 R-10, set of 4 17.95	4 Aduitional cost for heavy-duty sets (add		6 A-37	6.45
3 R-11 5.00	to Std. Pkg. price):	6.45	6 A-38 (420-1)	4.75
3 R-30 44.95 3 R-40 19.95	4 "B" Series 5 A-50	4.00	6 A-39	. 61
3 R-45, pair 12.95	5 A-120	14.95	6 A-40	. 28
3 R-46, pair 11.95	5 BF-1	32.50	6 A-41	.70
3 R-47, pair 10.95	5 BF-2 5 CA-10 (B52) set of 4	45.00 17.95	6 A-42 (720)	8.95
3 R-50 117.95 3 R-51 75.95		A ATTENDED	6 A-43	.75
3 R-55 64.95 3 R-56 122.50	5 CA-11 (B52) each 5 F-25	5.00 8.15	6 A-44 (420)	14.75
3 R-57 79.95 4 A-11 18.50	5 K-10, set of 4	17.95	6 A-45 (101)	2.75
4 A-12 21.50	5 K-11, each 5 N-25 (460)	4.95 6.25	6 A-46	3.96
4 A-13 21.50 4 A-14 21.50	5 N-27 (462)	1.32	6 A-47 (922)	12.50
4 A-15 21.50 4 A-43 (See B-43) 21.50	5 N-28 (422)	1.59	6 A-48 (420 & 922)	27.25
4 A-100 18.50 4 B-21 26.95 4 B-22 26.95 4 B-23 26.95	5 N-29 (490), pair	38.61	6 A-49 (6890)	. 30
4 B-22 4 B-23 26.95 26.95	Too, par			

Pag	STOCK NO.	LIST	Page No.		STOCK NO.	LIST	Page No.	STOCK NO.	LIST
7	EC-25	4.35	9	H-32		23.81	12	B-66 (46-9), 6 V.	.86
7	EC-26	5.45	9	H-33		19.85		B-67 (46-9-2) B-68 (46-9-4)	.37
- 1		16.50		H-35		4.40	12	B-69 (48), 6 V. B-90 (LB-10)	.71
7	HB-11 (88B) HB-12 (50P)	21.95			(2456)		12	B-91 (721-2)	.54
77	HB-15 (55P) HB-22	22.50 1.95				16.63	12	B-92 (721-5) B-127 (721), 12 V.	2.16
7	HB-23	1.95				12.83	12	B-128 (723), 12 V. B-130 (46-9), 12 V.	2.59
7	HB-24	3.25	9		(11326)	6.50	12	B-131 (48), 12 V. B-215 (58-Q-81)	.76
7	HB-40 (84B)	20.25	9	H-47	(2843-A)	3.78	12	B-220 (58-Q-8) B-221	1.88
7	HB-41	5.25	9	H-48	(2843-D)	3.78		B-222 (58-Q-4-1) B-223 (58-Q-15)	.70 1.12
7	M-40 (MC-542) M-48 (MC-505)	4.95 2.05	9	H-49	(4711G)	22.12		BP-67 (46-9-2) BP-70 (8), 6 V.	.37 2.76
7	M-49 (MC-507)	6.65	9	H-50	(4671-A)	13.93	12	BP-71 (9), 6 V. BP-97	3.41
7	M-50 (MC-553) M-52 (MC-509)	9.80 1.75	9	H-51	(4672A)	13.93	12	BP-98 BP-135 (8), 12 V.	.15
7	M-53 (MC-551) M-90 (MC-1055)	6.60 27.45	9	H-52	(5847D)	13.15	12	BP-136 (9), 12 V.	3.46
7	M-91 (MC-574) M-92	8.95 16.45	9	H-53	(11738A)	.22		BP-160	.48
7	M-93 (MC-566) M-94 (MC-1053)	9.80 30.65	9	H-54	(11872)	.18	12	BP-161	.48
7	M-95 (MC-1054) M-96 (MC-540)	32.15 3.75	9	H-55	(2873)	1.81	12	BP-162	.48
7	M-97 (MC-564)	10.50 11.80	9		(BLN16R)	9.05	12	BP-163	. 22
7	M-98 (MC-571) T-24 (24)	3.50	9		(3378)	3.54	12	BP-164	. 22
7	T-25 (25) T-34 (34)	3.75 4.25			(3377)	3.54	12	BP-165	.38
8	T-35 (35) HA-25	4.75 17.00	9				12	BP-166	.38
8	HA-26	17.50	9		(1-26009)	26.95	12	BP-167	. 16
8	HA-28	2.40	9		(21119)	3.78	12	BP-168	.16
8	HA-29 HA-30	2.55 2.30	9	H-82	(21122)	3.78	12	BP-180 (56-AC)	10.15
8	HA-31	2.45 13.95	9	KH-1	(39743)	19.60	12	BP-181 (56-A) BP-182	3.78 2.68
8	HA-35		9	KH-	2 (41149)	4.30	12	BP-183 BP-184	2.14
8	HA-36	15.95	9	KH-1	22-1 (30963)	77.40	12	BP-185, ft.	. 56
8	HA-37	14.00	9	KH-	22-2 (39742)	74.50	12 12	BP-186 (43-T) BP-189	1.62
8	HA-38	16.50	9	KH-	102-2 (40839)	59.65	12 12	BP-190 (57-AC) BP-191 (57-A)	12.85
8	HA-45 HA-46	2.25 9.50	10	B-70	(60-Q-3-B)	2.10	12 12	BP-192 BP-193	3.22 2.68
8	HA-47 HA-48	8.70 17.50	10	B-71	(60-Q-3-F) (60-Q-3-M)	2.30 2.10		BP-194 BP-195, ft.	.26
8	HA-49	. 55	10	BP-1	(No. 8, 3), ft. (60-Q-3-CA)	.78 3.12	12 12	BP-196 (47-TB) BP-9812 (98), 12 V.	2.38 3.21
8	HA-50 HA-51	2.50 9.90	10	BP-3	(60-Q-3-X)	2.98	12	BP-9868 (98), 6-8 V. BP-9912 (99), 12 V.	3.08 3.82
8	HA-52 HA-53	9.85 18.75	10	BP-5	(60-Q-3-XA) (60-Q-3-A)	5.08 2.68	12 12	BP-9968 (99), 6-8 V.	3.78
8 8	HA-54 SBC-6	.60 21.25	10 10	BP-3 BP-1	9 (60-Q-3-RW) 49 (60-Q-3-RPW	2.20	13	G-1	1.56
8	SBC-12 SBC-20	24.55 10.95	10	PF	50 (60-Q-3- RO)	7.77	13	G-2	1.56
8	SBC-25 ST-1	10.95 113.40	10 10	BP-1 BP-1	51 (60-Q-3-PR) 53 (60-Q-3)	4.13 3.90	10		
8		167.81 42.20	10		40 (60-Q-3-RP)	2.43	13	G-3	. 22
8	ST-11	51.37	11	BP-2	00 (50-A)	Price on request 15.90			
8	ST-30	51.52 14.47	11	BP-2	01 (50-B) 02 (50-F)	9.50 8.50	13	G-4	. 22
8 9		39.95 4.22	11		05 (50-A-XA) 06 (50-A-X)	19.83 9.20	13	G-5	1.63
9	CH-230	1.05	11	BP-2	10 (50 PR & -A-M)	30.00			
9	H-20	134.75	11 11	BP-2	211 (50-A-PR) 212 (50-A-M)	21.63 10.63	13	G-6	1.63
9	H-23 (3378-A)	2.33	11	BP-2	215, ft.	1.30 11.88	19	C 7	5.5
9	H-25	7.70	11 11	BP-2	216 (50-A-R) 217 (50-A-RM)	19.88	10	G-7	. 55
9	H-26 (1-26002)	90.83	11	BP-2		8.75 Price on request	13	G-8	. 55
9	H-27 (5882-N)	10.78	11	BP-2	230 (3550) 231 (3551)	39.00 39.00			
9	H-28 (40101)	21.21	11 11	BP-2 BP-2	236	49.20 49.20	13	G-9	.14
9	H-29 (3377-A)	2.84	12	B-17	(721), 6 V. 3 (723), 6 V.	2.12 2.55			

Pag	stock No.	LIST	Page No.	STOCK NO.	LIST	Page No.	STOCK NO.	LIST
13	M-3 (PC-506)	1.05		HL-31 (MED	22.05	17	H-175	3.25
13 13	M-5 (PC-504)	1.05	4 1	5002-25)	22.95	17	H-177 H-180	4.25 3.25
13 13	M-7 (PC-1001)	1.16 4.25	15	HL-32 (MED 5002-50)	37.95	17 17		3.75 17.25
13 13		4.10 3.00	15	HL-35 (MED		17 17	H-186 HL-130	2.75
13 13	M-10 (PC-500) M-11 (PC-100)	1.64		5003-15)	22.95	17 17	HL-135 HT-3	.70 10.95
13 13	M-20 (PC-508) M-21 (PC-507)	1.65 2.65	15	HL-36 (MED 5003-25)	32.95	17	HT-4	1.75
13 13	M-30 (PC-1003) M-31 (PC-1010)	2.61 8.00	15	HL-37 (MED		17	HT-7	1.10
13 13	M-32 M-33	4.00		5003-50)	57.95		HT-8 (No. 8), each	. 60
14 14	B-206 (206) B-208 (208)	.48	15	HL-50	29.95		HT-10 (No. 10), each	.50
14 14	B-209 (209) B-210 (210)	.64	15	HL-100	39.95		S-30	.70
14 14	B-211 (211) BP-40 (59)	1.14	15 15	X-10, ft. X-11, 100 ft.	. 25 22.50	17	5-50	.10
14	CH-200	.70		X-12, 50 ft.	13.50	17	S-40	.17
14	CH-227	1.19		X-13, 25 ft.	8.75	17	S-51	.15
14	CH-228	.50		X-14, 40 ft.	11.50	11	1)-01	.10
14	HH-1 (7101)	1.26			49.50	17	S-135	.15
14	HH-2 (8808)	1.13		X-20, ft.	.22	17	S 196	99
14	HH-3 (3221)	.80	15		15.50	17	S-136	. 22
14	HH-4 (3223)	1.32	15	X-22, 250 ft. coil	39.50	18	K-81	1.54
14	HH-5 (3321)	1.71	15	X-24, 40 ft.	8.75		K-83	.09
14	HH-6 (3323)	2.63		X-40, ft. X-41, 100 ft.	.16 12.50		K-84	.55
14	HH-7 (3421)	2.38			30.95		K-85	.55
14		3.30		X-44, 40 ft.	6.50		K-86	1.10
14	X-3	.20		X-103, per foot	.48		N-75	.17
14	X-6	.60	15	X-123, per foot EC-1202, 3/4"—	.32		N-76	. 43
				100 ft. roll EC-1202, 3/4"—ctn.	4.50		N-77	.51
14	X-9	.40	13.5	10-11			N-78	.51
15	BP-1, ft.	.78	16	EC-1202, 1"—100			N-79	.49
15 15	G-55, ft. G-56, 100 ft. spool	.15 7.50		ft. roll EC-1202, 1"—etn.	5.58		N-80	.49
15 15	G-64, ft. G-65, 100 ft. spool	.40 30.75	10	20 1202, 1			N-81	.46
15 15	G-68, ft. G-69, 100 ft. spool	.75 55.00	16	EC-1279, 30" length—		18	N-82	.39
15	HL-1 (MED 5000-1)	3.95	16	each EC-1279—ctn.	. 95		N-83	.46
15	HL-2 (MED 5000-2)	1.95	10	DO-1270 Con.			N-84	.43
15	117 - 100 - 100	19.95	16	G-81, 60 ft. roll	.89	18	N-85	.18
15	HL-4 (MED 5000-4A)	4.50	16	MM-40, 60 yd. roll	1.25		N-86	.22
15	HL-11 (MED 5001-1)	5.50					N-87	.22
15	HL-13 (MED 5001-2)	29.95	16	MM-50, 20 ft. roll	.75		N-88	.49
15	HL-14 (MED 5000-4B)	4.50	16 17	MM-51, 66 ft. roll H-116	1.95		N-90	.52
15	HL-20 (MED 5004)	2.50	17 17	H-117 H-119	3.50 3.25 2.75		N-91	.52
15			17 17	H-120 H-126	2.34	18	N-92	.52
15			17 17	H-127 H-144	9.75 12.50 1.25	18	Z-2	3.37
15			17 17	H-145 H-148	1.25 1.10 3.25	18	Z-3	2.25
15			17	H-149 H-153	.39	18	Z-7	1.50
15	15.3 49.3 100 1007	4.50	17 17	H-154 H-155	1.25 1.10		Z-11	4.12
15	ELIES WITH	The section of	17	H-160 H-161	3.95 2.95		Z-11 Z-15	3.94
	5002-15)	16.95	17	H-171	.85 3.25 3.50			
			17	H-173	3.50	19	Z-16, ft.	.14

18	Page No.		STOCK NO.	LIST		Page No.	STOCK NO.	LIST	Page No.	STOCK NO.	LIST
18 2-20	18	Z-18		.12		20	B-6 (216)				
18   2-20	18	Z-19		.12		20	B-8	.50	22	U-6030	37.40
18   2-24	18	Z-20		5.06		20	B-10	.60	22	U-6630	39.60
18   2-24	18	Z-21		3.93		20	B-12	.05	22	U-7230	41.80
18   2-25   .46						20	B-27 (500P), 12 V.		22	U-7830	37.95 44.00
18						20 20	B-30 (326-S) B-31 (500-P), 6 V.	3.00	22	U-8424	
18						20	B-35 (500-11)	.50	22	U-9024	41.95
18   Z-28   2.25   3.0   8-36 (25.20)   1.50   2.20   1.10224   45.75   18   Z-28   2.25   3.0   8-36 (25.20)   1.50   3.2   1.10234   45.50   3.2   1.10234   45.50   3.2   1.10234   45.50   3.2   1.10234   45.50   3.2   1.10234   45.50   3.2   1.10234   45.50   3.2   1.10234   45.50   3.2   1.10234   45.50   3.2	18	Z-26		1.97		20	B-39 (503·C), 6 V.	3.60	22	U-9624	43.75
18 Z-29	18	Z-27		.12		20	B-49 (173-C)	2.40	22	U-10224	45.75
18 Z-30	18	Z-28		2.25		20	B-94 (223-0)	1.80	22	U-10824	47.95
18   Z-30	18	Z-29		.12		20	B-97 (200)	3.96	22	U-11424	49.50
18 Z-32	18	Z-30		2.81		20	B-99 (202)	3.16	22	U-12024	51.50
18   Z-32   3   65   20   BP-33 (230-VP-2)   1   58   22   U-13230   63   56   36   56   56   56   56   56	18	Z-31		.12		20	BP-23 (23)	2.70	22	U-12624	53.50
18    2-34	18	Z-32		3.65		20	BP-33 (230-VP-2)	1.58	22	U-13224	55.50
18   Z-38   3,94   20   BP-275 (L-77)   10,00   22   U-14430   68,50	18	Z-34		4.22		20	BP-112 (111-DH)	3.75	22	U-13824	57.50
18   Z=40	18	Z-38		3.94		20	BP-275 (L-77)	10.00	22	U-14424	59.25
	18	Z-40		4.26		20 21	BP-280 (SP-77) B-32 (S-20)	. 24	22	U-15024	61.25
19   18-21 (104-10-1)						21 21	B-33 (S-19)	.20	22	U-15030 U-15624	
19   D-31 (1040-B)   7-50		D-30	(1040-B)	7.50		21	B-37 (S60-A)	.16	22		
19   D-35				7.50		21	B-42 (H-7)	1.40	22		
19 D-37				1.20		21	B-44 (H-85)	2.96	22	UM-514	107.00
D-40, each   S0				1.85	20-E St. 05	21	B-46 (L-50)	6.30	22	UM-518	133.00
19 D-H1	19	D-39		.25		21	B-48	4.20	22	UM-522	155.00
19 D-43, pair	19	D-11		.05		21	B-51 (L-54)	7.48	22	UM-526	180.00
19 D-46	19	D-43	, pair	.10		21	B-53 (H-20)	5.28	22	UM-530	205.00
19 D-48 (1040-DK), 154" 8.50	19	D-45		3.40		21	B-55 (H-20-2)	1.76	22	UM-534	228.00
18   18   18   18   18   18   18   18	19	D-48	(1040-DK), 11/5"	8.50		21	B-58 (No. 2)	11.94	22		78.00
19   D-52 (X-1)   1.53	19	D-50	(1040-DK), 2"	8.50		21	B-59 (No. 3) B-63 (B-23)	11.98			108.00
19 D-54 (X-10) 12 21 B-306 (L-66) 7.90 22 UM-618 151.00 19 D-55 1.20 21 B-307 8.06 22 UM-620 164.00 19 D-56 9.05 22 B-310 (L-66-2) 1.65 22 UM-622 177.00 19 D-57 (X-9) .25 21 B-310 (L-66-2) .88 22 UM-622 177.00 19 D-70 (606) 8.50 21 B-311 (BPL-66-2) .88 22 UM-626 207.00 19 D-70 (555) 2 00 21 B-312 (L-66-6) .56 22 UM-628 22.00 19 D-72 (555) 2 70 21 B-313 (L-66-3) .34 22 UM-628 22.00 19 D-72 (555) 2 70 21 B-314 (L-66-15) .56 22 UM-633 237.00 19 F-1 .70 21 B-315 (BPL-66-1) 1.10 22 UM-633 250.00 19 K-50 (2050) 5.50 21 B-317 (L-66-14) 1.76 22 UM-633 250.00 19 K-51 (2038) .60 21 B-316 (L-66-9) .34 22 UM-708 83.00 19 K-52 (2039) .60 21 B-318 (BPL-66-7) .34 22 UM-710 101.00 19 K-52 (2039) .60 21 B-320 (L-66-8) .12 22 UM-714 141.00 19 K-53 (1204) .45 21 B-322 (L-66-10) .12 22 UM-714 141.00 19 K-54 (3013) .12 22 U-702 3 25 22 UM-726 22 UM-726 23 20.00 19 K-88 (28) 3.50 22 U-704 9.50 22 UM-728 248.00 19 K-89 (29) 3.50 22 U-705 10.75 22 UM-728 248.00 19 K-90 (1203) .30 22 U-706 10.75 22 UM-734 294.00 19 K-94 6.05 22 U-706 10.75 22 UM-734 294.00 19 K-95 6.60 22 U-830 24 22 U-706 22 UM-734 294.00 19 K-96 (1203) .30 22 U-706 10.75 22 UM-734 294.00 19 K-96 (1203) .30 22 U-706 10.75 22 UM-734 294.00 19 K-96 (1203) .30 22 U-706 10.75 22 UM-734 294.00 19 K-96 (1203) .30 22 U-706 10.75 22 UM-734 294.00 19 K-96 (1203) .30 22 U-706 10.75 22 UM-736 233.00 19 K-96 (1203) .30 22 U-834 18.70 22 UM-738 248.00 19 K-96 (1203) .30 22 U-834 22 U-706 22 UM-734 294.00 19 K-96 (1203) .30 22 U-830 24 20 25 22 UM-734 294.00 19 K-96 (1203) .30 22 U-830 24 22 U-738 182.00 19 V-14 9.50 22 U-830 24 22 UM-734 294.00 19 V-15 4.25 22 U-830 30.80 22 UR-738 182.00 19 V-16 1.25 22 U-830 30.80 22 UR-738 182.00 19 V-16 1.25 22 U-830 30.80 22 UR-738 259.00 19 V-16 1.25 22 U-830 30.80 22 UR-738 259.00 19 V-16 1.25 22 U-830 30.80 22 UR-738 259.00 19 V-16 1.25 22 U-830 30.80 22 UR-738 259.00 19 V-16 1.25 22 U-830 30.80 22 UR-738 259.00 19 V-16 1.25 22 U-830 30.80 22 UR-738 259.00 19 V-17 4.50 22 U-830 30.80 22 UR-738 259.00	19	D-53		. 16			B-64 (C-18)				
19   D-50   .95   .95   .25   .21   B-310 (L-66-2)   .88   .22   UM-624   194 .00     19   D-60 (6006)   8.50   .21   B-312 (L-66-6)   .56   .22   UM-626   .207 .00     19   D-70 (555)   .2 .00   .21   B-313 (L-66-3)   .34   .22   .24 .04 .22   .25 .20 .00     19   D-70 (555)   .2 .70   .21   B-313 (L-66-15)   .56   .22   .22   .24 .20 .00     19   D-70 (555)   .2 .70   .21   B-313 (L-66-15)   .56   .22   .24 .20 .00     19   F-1   .70   .21   B-315 (BPL-66-1)   .10   .22   .24 .25 .25 .00     19   K-50 (2050)   .5.50   .21   B-313 (L-66-14)   .1.65   .22   .24 .20 .20   .25 .25 .20     19   K-51 (2038)   .60   .21   B-318 (BPL-66-7)   .34   .22   .24 .20   .25 .25 .20     19   K-52 (2039)   .60   .21   B-318 (BPL-66-10)   .12   .22   .24 .20   .24 .20   .25 .20     19   K-53 (1204)   .45   .21   B-322 (1-66-10)   .12   .22   .24 .20   .25 .20   .25 .20     19   K-54 (3013)   .12   .22   .27 .20   .25	19	D-55		1.20		21	B-306 (L-66)	7.90	22	UM-618	
19 D-60 (606) 8 5.50 21 B-312 (1-66-6) 56 22 UM-626 207.00 19 D-70 (555) 2 00 21 B-313 (1-66-6) 56 22 UM-628 220.00 19 D-72 (555) 2 70 21 B-313 (1-66-61) 1.00 22 UM-632 250.00 19 F-1 70 21 B-315 (BPL-66-1) 1.10 22 UM-632 250.00 19 K-50 (2050) 5.50 21 B-317 (1-66-14) 1.65 22 UM-638 263.00 19 K-51 (2038) 60 21 B-318 (BPL-66-7) 34 22 UM-708 83.00 19 K-52 (2039) 60 21 B-318 (BPL-66-7) 34 22 UM-710 101.00 19 K-52 (2039) 60 21 B-320 (1-66-8) 12 22 UM-711 116.00 19 K-53 (1204) 45 21 B-322 (1-66-60) 1.12 22 UM-714 141.00 19 K-53 (1204) 45 21 B-322 (1-66-60) 1.12 22 UM-716 158.00 19 K-54 (3013) 1.12 22 U-703 8.50 22 UM-716 158.00 19 K-88 (28) 3.50 22 U-704 9.50 22 UM-722 201.00 19 K-89 (29) 3.50 22 U-705 10.75 22 UM-728 233.00 19 K-90 (1203) 3.50 22 U-705 10.75 22 UM-728 233.00 19 K-90 (1203) 3.0 22 U-830 22.00 22 UM-738 248.00 19 K-94 6.05 22 U-830 22 U-830 22 U-830 22 U-736 32 U-830 22 UM-736 330.00 19 K-94 6.05 22 U-830 22 U-830 22 U-830 22 U-736 32 U-830 22 UM-736 330.00 19 K-94 6.05 22 U-830 22 U-830 22 U-830 22 U-830 22 UM-736 330.00 19 K-94 6.05 22 U-830 22 U-	19	D-57	(X-9)	. 25		21	B-310 (L-66-2)	1.65	22		
19   19   17   17   17   18   13   14   16   16   15   15   16   15   16   17   17   17   18   13   15   18   16   16   17   17   18   13   15   18   16   16   17   17   18   13   18   18   18   18   18   18	19	D-70	(555)	2.00		21	B-312 (L-66-6)	.56	22	UM-626	207.00
19 K-50 (2050) 5.50 21 B-316 (L-66-1) 1.55 22 UM-634 263.00  19 K-51 (2038) .60 21 B-317 (L-66-1) 34 22 UM-708 83.00  19 K-52 (2039) .60 21 B-319 (L-66-9) .34 22 UM-710 101.00  19 K-52 (2039) .60 21 B-320 (L-68-8) .12 22 UM-712 116.00  19 K-53 (1204) .45 21 B-322 (L-68-10) .12 22 UM-714 141.00  19 K-53 (1204) .45 21 B-66 (SP-66) .16 22 UM-718 173.00  19 K-54 (3013) .12 22 U-702 3.25 22 UM-720 187.00  19 K-88 (28) 3.50 22 U-703 8.50 22 UM-722 201.00  19 K-89 (29) 3.50 22 U-705 10.75 22 UM-726 233.00  19 K-89 (29) 3.50 22 U-706 12.00 22 UM-726 233.00  19 K-90 (1203) .30 22 U-1830 22.00 22 UM-732 248.00  19 K-94 6.05 22 U-1830 22.00 22 UM-733 266.00  19 K-95 6.60 22 U-2430 22.00 22 UM-734 294.00  19 K-95 6.60 22 U-3030 26.40 22 UM-736 395.00  19 V-14 9.50 22 U-3030 26.40 22 UR-724 169.00  19 V-15 4.25 22 U-3630 28.60 22 UR-724 169.00  19 V-16 1.25 22 U-3630 28.60 22 UR-724 169.00  19 V-16 1.25 22 U-3630 28.60 22 UR-724 169.00  19 V-16 1.25 22 U-3630 28.60 22 UR-726 182.00  19 V-16 1.25 22 U-3630 28.60 22 UR-726 182.00  19 V-16 1.25 22 U-3630 28.60 22 UR-728 195.00  19 V-16 1.25 22 U-3630 28.60 22 UR-733 20.90  19 V-16 1.25 22 U-4824 26.50 22 UR-732 22.00  19 V-16 1.25 22 U-4834 24.50 22 UR-733 20.90  19 V-16 1.25 22 U-4844 28.50 22 UR-732 22.00  19 V-17 4.50 22 U-4824 28.50 22 UR-732 22.00  19 V-16 1.25 22 U-4834 30.00  20 B-5 (162-0) 1.72 22 U-4830 33.00  22 U-738 225.00  22 U-738 225.00  22 UR-738 225.00			(555)			21	B-314 (L-66-15)	.56	22	UM-630	237.00
19 K-51 (2038)	19	K-50	(2050)	5.50		21	B-316 (L-66-1)	1.65	22	UM-634	263.00
19 K-52 (2039)	19	K-51	(2038)			21	B-318 (BPL-66-7)	.34	22	UM-708	83.00
19 K-53 (1204) .45 21 B-322, doz25 22 UM-716 158.00  19 K-54 (3013) .12 22 U-702 3.25 22 UM-718 173.00  19 K-88 (28) 3.50 22 U-703 8.50 22 UM-722 201.00  19 K-89 (29) 3.50 22 U-704 9.50 22 UM-724 219.00  19 K-89 (29) 3.50 22 U-705 10.75 22 UM-726 233.00  19 K-90 (1203) .30 22 U-1830 22.00 22 UM-730 266.00  19 K-94 6.05 22 U-2424 20.65 22 UM-734 294.00  19 K-95 6.60 22 U-3030 26.40 22 UM-736 308.00  19 K-95 6.60 22 U-3030 26.40 22 UR-728 195.00  10 V-14 9.50 22 U-3624 24.50 22 UR-726 182.00  10 V-15 4.25 22 U-3630 28.60 22 UR-728 195.00  10 V-16 1.25 22 U-4830 28.60 22 UR-728 195.00  10 V-16 1.25 22 U-4830 28.60 22 UR-728 195.00  10 V-16 1.25 22 U-4830 28.60 22 UR-728 195.00  10 V-16 1.25 22 U-4830 30.80 22 UR-728 195.00  10 V-16 1.25 22 U-4830 30.80 22 UR-736 22 UR-728 195.00  10 V-16 1.25 22 U-4230 30.80 22 UR-738 22 UR-738 22 UR-738 195.00  10 V-17 4.50 22 U-4830 30.80 22 UR-738 22 UR-7	19	K-52	(2039)	.60		21	B-320 (L-66-8)	.12	22	UM-712	116.00
19 K-54 (3013)				.45		21	B-322, doz.	.25	22	UM-716	158.00
19 K-88 (28) 3.50 22 U-704 9.50 22 UM-726 233.00  19 K-89 (29) 3.50 22 U-706 12.00 22 UM-728 248.00  19 K-90 (1203) .30 22 U-1830 22.00 22 UM-730 266.00  19 K-94 6.05 22 U-2430 24.20 22 UM-734 294.00  19 K-95 6.60 22 U-3630 24.20 22 UM-736 308.00  19 K-95 6.60 22 U-3630 24.20 22 UM-736 182.00  19 V-14 9.50 22 U-3634 24.50 22 UR-724 169.00  19 V-15 4.25 22 U-3630 28.60 22 UR-728 195.00  19 V-16 1.25 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4824 28.50 22 UR-734 233.00  20 B-4 (162-0) 1.72 22 U-4830 33.00  20 B-5 (162-0) 1.72 22 U-8830 33.00  20 UR-736 244.00  20 D-7 H	19	K-54	(3013)	.12		22	U-702	3.25	22	UM-720	187.00
19 K-89 (29) 3.50 22 U-706 12.00 22 UM-728 248.00  19 K-90 (1203) .30 22 U-1824 18.70 22 UM-730 266.00  19 K-94 6.05 22 U-2424 20.65 22 UM-734 294.00  19 K-95 6.60 22 U-3030 24.20 22 UM-736 308.00  19 K-95 6.60 22 U-3030 26.40 22 UR-722 154.00  19 V-14 9.50 22 U-3624 24.50 22 UR-726 182.00  19 V-15 4.25 22 U-3624 24.50 22 UR-728 195.00  19 V-16 1.25 22 U-4230 30.80 22 UR-738 195.00  19 V-16 2.1 25 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4230 30.80 22 UR-734 233.00  19 V-17 4.50 22 U-4824 28.50 22 UR-734 233.00  20 B-4 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00  20 B-5 (162-0) 1.72 22 U-8430 33.00 22 UR-736 244.00	19	K-88	(28)	3.50		22	U-704	9.50	22	UM-724	219.00
19 K-90 (1203)	19	K-89	(29)			22	U-706	12.00	22	UM-728	248.00
19 K-94 6.05 22 U-2430 24.20 22 UM-736 308.00  19 K-95 6.60 22 U-3030 26.40 22 UR-722 154.00  19 V-14 9.50 22 U-3624 24.50 22 UR-726 182.00  19 V-15 4.25 22 U-3630 28.60 22 UR-728 195.00  19 V-16 1.25 22 U-4230 30.80 22 UR-730 209.00  19 V-17 4.50 22 U-4230 30.80 22 UR-732 222.00  19 V-17 4.50 22 U-4824 28.50 22 UR-734 233.00  20 B-4 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00	19					22	U-1830	22.00	22	UM-732	279.00
19 K-95 6.60 22 U-3030 26.40 22 UR-724 169.00 22 U-3624 24.50 22 UR-726 182.00 22 U-3624 24.50 22 UR-726 182.00 22 UR-728 22 UR-728 22 UR-728 22 UR-728 29.00 29.00 29.10 V-15 4.25 22 U-4230 30.80 22 UR-730 209.00 29.10 V-16 1.25 22 U-4230 30.80 22 UR-732 222.00 29.10 V-17 4.50 22 U-4824 28.50 22 UR-734 233.00 20 B-4 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00 29. B-5 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00 29. B-5 (162-0) 1.72 22 U-4830 30.00 22 UR-736 245.00 29. UR-736 259.00				6.05		22	U-2430	24.20	22	UM-736	308.00
19 V-14 9.50 22 U-3630 28.60 22 UR-728 195.00 19 V-15 4.25 22 U-4230 30.80 22 UR-732 222.00 19 V-16 1.25 22 U-4230 30.80 22 UR-732 222.00 19 V-17 4.50 22 U-4824 28.50 22 UR-734 233.00 20 B-4 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00 20 B-5 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00	19	K-95	45.00			22	U-3030	26.40	22	UR-724	169.00
19 V-15 4.25 22 U-4224 26.40 22 UR-732 229.00 19 V-16 1.25 22 U-4230 30.80 22 UR-732 222.00 19 V-17 4.50 22 U-4824 28.50 22 UR-734 233.00 20 B-4 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00 20 B-5 (162-0) 1.72 22 U-4830 32.00 22 UR-738 259.00	19	V-14				22	U-3630	28.60	22	UR-728	195.00
19 V-17 4.50 22 U-4824 28.50 22 UR-736 244.00 20 B-4 (162-0) 1.72 22 U-4830 33.00 22 UR-736 244.00 20 B-5 (162-0) 1.72 22 U-4830 33.00 22 UR-738 259.00				4.25		22	U-4230	30.80	22	UR-732	222.00
90 B 5 100 0 1 00 99 11 5494 30 95 22 UR-738 259 00	19	B-4 (	(162-0)	4.50		22	U-4830	33.00	22	UR-736	244.00
	20	B-5 (	(163-0)			22	U-5424	30.25	22	UR-740	

Pa N		LIST	Pa N	ge o. STOCK NO.	LIST	Page No. STOCK NO.	LIST
22		90.00	23		71.75	24 N-2 (2SR)	24.00
22 22	UR-812 UR-814	103.00 115.00	23		82.80 83.35	24 N-3 (1SP)	26.00
22 22	UR-816	115.00 131.00 146.00	28 28		94.40 102.05	24 N-4 (1SPR)	33.00
22	UR-820	160.00 174.00	23	BA-926	109.70 120.80	the season of the	45.80
22	UR-824	193.00	23	BA-930	121.30	24 N-5 (D1SPR)	
22 22	UR-828	208.00 223.00	23 23	BA-934	128.75 138.85	24 N-6 (3S)	25.80
22 22		240.00 254.00	23 23		147.50 155.15	24 N-7 (3SR)	33.30
22 22	UR-834	268.00 281.00	23	BA-940	159.10 60.60	24 N-8 (2SP)	35.90
22 22	UR-838	298.00 312.00	23	BA-1014	68.90 77.20	24 N-9 (2SPR)	44.70
22	UR-910	99.00	23	BA-1018	88.90	24 N-10 (D2SPR)	67.90
22 22	UR-914	113.00 128.00	23	BA-1022	89.45 101.35	24 P-40	21.50
22 22		147.00 164.00	23 23		109.60 117.90	24 P-41 24 P-42	24.75 32.95
22 22	UR-920 UR-922	180.00 197.00	23 23		129.60 130.15	24 SG-1	3.25
22 22	UR-924	218.00 235.00	23 23	BA-1032	138.65 150.35	24 SG-2	3.25
22	UR-928	253.00	23 23	BA-1036	158.60	25 A-60	3.85
22 22	UR-932	272.00 289.00	23	BA-1040	166.90 170.85	25 A-61 25 A-62	4.18
22 22	UR-936	305.00 321.00	23 23	BS-812	59.85 76.00	25 A-63 25 A-64	5.28 5.39
22 22	UR-938 UR-940	340.00 356.00	23 23		82.85 89.90	25 A-65 25 A-66	5.61 5.83
22 22	UR-942	371.00 390.00	23 23		105.85 106.35	25 A-67 25 A-68	6.60 7.26
22 22	UR-1010 UR-1012	108.00 125.00	23 23	BS-822	122.35 129.35	25 A-88, pr. 25 A-90, yd.	.40
22 22	UR-1014	142.00	23	BS-826	136.20	25 A-93, 1000 yd. roll	.08
22	UR-1016 UR-1018	163.00 182.00	23	BS-912	152.35 79.80	25 A-95, yd. 25 A-96, 72 yd. roll	.40
22 22	UR-1020 UR-1022	201.00 220.00	23 23	BS-916	87.45 95.15	25 A-98, yd. 25 A-99, 72 yd. roll	.45
22 22	UR-1024 UR-1026	243.00 263.00	23 23		111.95 112.45	25 CC-12, pr. 25 CMH-12	.39 4.90
22 22	UR-1028 UR-1030	283.00 305.00	23 23		129.25 135.25		6.50
22 22	UR-1032 UR-1034	324.00 342.00	23 23	BS-926	144.60 161.60	25 F-40	
22 22	UR-1036	360.00	23	BS-930	162.10 169.60	25 ME-1 ("55") 25 ME-5 ("Jet")	126.95 $120.95$
22	UR-1040	381.00 399.00	23	BS-934	186.40	25 NT-1	4.95
22 22	UR-1042 UR-1044	417.00 439.00	23 23	BS-938	194.05 201.70	25 NT-2	.65
23	BA-10	3.30	23 23	BS-1012	211.35 89.35	25 Z-50	1.00
23		3.96	23 23	BS-1016	97.85 106.10	26 SS-100 (170)	16.90
23		4.62	23 23	BS-1018 BS-1020	124.65 125.15	26 SS-101 (120)	10.70
23		5.28	23 23	BS-1022	144.15 152.65	26 SS-102	1.50
23	BA-18	5.94	23 23	BS-1026	160.90 179.90	26 SS-103	2.10
23	BA-20	6.60	23 23	BS-1030	180.40 188.90	26 SS-104	1.50
23	BA-24, yd.	5.00	23	BS-1034	207.45 215.95	26 SS-105	.50
23 23	BA-26	4.00	23	BS-1038	224.20	26 SS-106 (148)	23.50
23 23	BA-28	.35	23 23	E-120, pt.	233.95	26 SS-107 (151-O)	7.00
23 23	BA-30	2.15	23 23	E-122, gal.	1.25 3.75	26 SS-108 (151-S)	14.25
23 23	BA-32 BA-33	.11	23	E-130, 150 ft. roll	17.50 9.75	26 SS-109 (151-L)	17.50
23	BA-34	- 1,54A) 652 997	23 23		.10 17.50		10.50
23	BA-40, ft.	.06	23 23	E-133, ft.	.15		
23 23	BA-50, gal.	2.80	28		2.55	26 SS-121	3.80
23 23	BA-62, 100 ft. roll	1.25	24		5.00	26 SS-122	2.40
23 23	BA-810	1.62 42.65	24	CB-1	32.75	26 SS-123	7.95
23 23	BA-812 BA-814	53.05 59.90	24	F-10	6.50	26 SS-124 (225)	10.40
23 23	BA-816 BA-818	66 90 77.15	24	L-1	11.95	26 SS-125	2.30
23	BA-820 BA-912	77.65 56.40	24 24		17.95 18.80	26 SS-126	6.70
23	BA-914	64.10					

Pag-No	STOCK NO.	LIST	Page No.	STOCK NO.	LIST	Page No. STOCK NO.	LIST
26	SS-127	1.60	28	W-9 (203-B)	.34	29 WM-16 (M-1731)	14.37
26	SS-130 (427)	15.80	28	W-10 (203)	4.00	30 W-25 (K1013R)	10.02
26	SS-131	1.00	28	W-119 (401-A)	1.22	30 W-26 (K1017R)	10.73
26	SS-132	8.70	28	W-120 (401-B)	.34	30 W-27 (K1023R)	12.14
26	SS-133	1.20	28	W-126 (1001)	6.98	30 W-28 (K1031R)	13.99
26	SS-134	7.50	28	W-127 (1001-C)	2.76	30 W-29 (K1723R)	14.66
26	SS-138	.75	28	W-128 (1001-A)	2.73	30 W-30 (K1731R)	17.24
26	SS-139	2.00	28	W-129 (1001-B)	1.47	30 W-31 (K1743R)	23.52
26	SS-160 (127)	15.50	28	W-197 (M-14)	.24	30 W-32 (165165C)	5.82
26	SS-161	3.80	28	W-198 (M-18)	.11	30 W-32F (165165F)	7.22
26	SS-165 (128)	16.00	28	W-199 (M-17)	.09	30 W-33 (125185C)	6.28
26	88-170 (129)	12.80	28	WP-1 (415)	8.64	30 W-33F (125185F)	7.48
26	SS-199	1.10	28	WP-2 (415-S)	1.89	30 W-34 (1600C)	6.51
27	SS-110 (220)	16.80	28	WP-3 (415-P)	1.26	30 W-34F (1600F)	7.50
27	SS-111	7.00	28	WP-4	1.01	30 W-35 (165225C)	7.10
27	SS-112	6.72	28	WP-5 (415-A)	.49	30 W-35F (165225F)	8.93
27	SS-113	.80	28	WP-6 (MXL)	18.65	30 W-36 (700D)	.11
27	- 7 X T	2.10	28	WP-7 (MX)	17.81	30 W-37 (700F)	.32
27	SS-115 (80)	1.20	28	WP-8 (415-H)	5.42	30 W-38 (700G)	.57
27	SS-117 (66DH)	2.80	28	WP-9 (415-MXL)	27.83	30 W-39 (700-GA)	.30
27	SS-118 (66)	6.10	28	WP-10 (1471)	10.95	30 W-40 (700-H)	.15
27		19.50	29	W-14 (122-AS)	1.68	30 W-41 (700-L)	.34
27		7.00	29	W-42 (122-1)	11.28	30 W-44 (5017-S)	6.62
27		10.95	29	W-43	2.65	30 W-190 (K-17)	2.75
27		.80	29	W-130 (130)	26.04	30 W-191 (720-17)	1.68
27		2.50	29	W-131 (131)	9.85	30 W-192 (K-10)	2.54
27		1.10	29	W-133 (130-F)	2.59	30 W-193 (720-10)	1.68
27	MIN TAX 4-4	1.30	29	W-134 (130-G)	4.65	30 W-194 (720-5)	1.68
27		1.30	29	W-135 (406-T)	18.82	30 WP-28, foot	.08
2		3.00	29	W-136 (405-T)	2.65	30 WP-29 (700-F)	.26
2		.20	29	W-137 (108-1)	11.26	30 WP-30 (700-G)	.49
2'		15.76	29	W-138	2.65	30 WP-31 (700-GA)	.26
2		2.80	29	W-139 (122-A)	1.68	30 WP-141 (A)	2.94
2		19.08	29	W-140 (108-A)	1.68	30 WP-142 (A)	3.17
2		3.80	29	W-141 (108-AS)	1.68	30 WP-143 (A)	3.61
2	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1.40	29	W-180 (440)	21.32	30 WP-144 (A)	4.20
2		.85	29	WM-1 (M-800C)	2.35	30 WP-145 (A)	3.76
2		.74	29	WM-2 (M-800F)	3.25	30 WP-146 (A)	4.22
2		.74	29	WM-5 (M-5010)	5.65	30 WP-147 (A)	5.00
2		2.31	29	WM-10 (M-1013	8.86	30 WP-148 (A)	7.22
	8 W-4 (403-B)	.32	29	WM-11 (M-1017	9.56	30 WP-149 (A)	1.79
	8 W-5 (203-A)	2.61	29	WM-12 (M-1023	3) 10.80	30 WP-151 (B)	5.52
	8 W-6 (203-A)	2.61	29	WM-13 (M-1031	12.52	30 WP-152 (B)	5.96
	8 W-7 (413)	2.48	29	WM-14 (M-1717	7) 10.92	30 WP-153 (B)	6.66
	8 W-8 (203-C)	1.29	29	WM-15 (M-1723	3) 12.29	30 WP-154 (B)	7.60

Pa N	ge o. STOCK NO.	LIST	Page No.	STOCK NO.	LIST	Page No. STOCK NO.	LIST
30		6.74	30	Y-76	1.68	31 WJ-2317	21.13
30	WP-156 (B)	7.60	30	Y-80	1.77	31 WJ-2323	23.73
30	WP-157 (B)	8.95	30	Y-84	1.85	31 WJ-2331	28.33
30	WP-158 (B)	13.90	30	Y-86	1.89	31 WJ-2343	33.71
30	WP-159 (B)	3.38	30	Y-88	1.94	31 WJ-3117	23.71
30	WP-161 (C)	1.43	30	Y-90	2.00	31 WJ-3123	26.72
30	WP-162 (C)	1.62	30	Y-91	2.02	31 WJ-3131	31.65
30	WP-163 (C)	2.00	30	Y-96	2.13	31 WJ-3143	37.57
30	WP-164 (C)	2.65	30	Y-102	2.25	31 WJ-4317	28.02
30	WP-165 (C)	2.10	30	Y-107	2.36	31 WJ-4323	31.29
30	WP-166 (C)	2.48	30	Y-111	2.46	31 WJ-4331	36.82
30	WP-167 (C)	2.96	30	Y-112	2.56	31 WJ-4343	44.44
30	WP-168 (C)	3.70	30	Y-118	2.61	31 WP-1717	7.06
30	WP-169 (C)	1.37	30	Y-123	2.71	31 WP-1723	8.22
30	WP-171 (SF)	2.21	30	Y-127	2.80	31 WP-1731	9.85
30	WP-172 (SF)	2.37	30	Y-130	2.88	31 WP-1743	12.31
30	WP-173 (SF)	2.67	30	Y-134	2.97	31 WP-2317	8.22
30	WP-174 (SF)	3.26	30	Y-138	3.05	31 WP-2323	9.35
30	WP-175 (SF)	2.75	30	Y-146	3.22	31· WP-2331	11.09
30	WP-176 (SF)	3.09	30	Y-154	3.41	31 .WP-2343	13.44
30	WP-177 (SF)	3.61	31	W-16	.74	31 WP-3117	9.85
30	WP-178 (SF)	5.10	31	WA-1717	15.31	31 WP-3123	11.24
30	WP-179 (SF)	1.55	31	WA-1723	16.74	31 WP-3131	12.73
30	Y-16	.36	31	WA-1731	18.69	31 WP-3143	15.54
30	Y-20	.45	31	WA-1743	23.21	31 WP-4317	12.31
30	Y-24	.53	31	WA-2317	16.74	31 WP-4323	13.70
30	Y-26	.57	31	WA-3117	18.69	31 WP-4331	16.15
30	Y-28	.61	31	WA-4317	23.21	31 WP-4343	20.16
30	Y-31	.70	31	WAP-1723	17.33	31 WPA-1723	17.33
30	Y-34	.76	31	WAP-1731	19.07	31 WPA-1731	19.07
30	Y-35	.78	31	WAP-1743	21.36	31 WPA-1743	21.36
30	Y-36	.80	31	WAP-2323	19.62	31 WPA-2323	19.62
30	Y-38	.84	31	WAP-2331	21.34	31 WPA-2331	21.34
30	Y-40	.89	31	WAP-2343	24.05	31 WPA-2343	24.05
30	Y-42	.93	31	WAP-3123	22.71	31 WPA-3123	22.71
30	Y-46	1.01	31	WAP-3131	24.43	31 WPA-3131	24.43
30	Y-48	1.05	31	WAP-3143	27.79	31 WPA-3143	27.79
30	Y-52	1.16	31	WAP-4323	27.05	31 WPA-4323	27.05
30	Y-54	1.20	31	WAP-4331	29.17	31 WPA-4331	29.17
30	Y-60	1.33	31	WAP-4343	33.37	31 WPA-4343	33.37
30	Y-64	1.41	31	WJ-1 (6791)	2.35	32 K-30 32 K-31	6.25
30	Y-66	1.45	31	WJ-1717	19.41	32 K-32 32 L-11	2.25
30	Y-70	1.56	31	WJ-1723	21.89	32 L-19 32 L-25-M	.38
30	Y-72	1.60	31	WJ-1731	26.19	32 L-32 32 L-38	.52
30	Y-74	1.64	31	WJ-1743	31.36	32 L-43 32 L-45	.64

Page No. STOCK NO.	LIST	Page No. STOCK NO.	LIST	Page No. STOCK NO.	LIST
32 L-50	.98	32 MPG-3118 32 MPG-3124	1.98 2.12	35 PR-50 (F-12) 35 PR-51 (F-18)	69.50 76.95
32 L-55 32 L-60	1.04 1.08 1.18	32 MPG-3131 32 MPG-3142	2.28 2.50	35 SF-1	3.75
32 L-65 32 L-70 32 L-75	1.24 1.28	32 MPG-4242 32 MV-518	2.92 7.74	35 X-4	4.95
32 L-85 32 L-90	1.44	32 MV-520 (W-639) 33 LG-2 (G-55)	1.50 146.50	36 AP-1 (252D) 36 AP-2 (252D)	15.95 15.95
32 L-100 32 M-75	1.66 6.25	33 LG-3 (E-55) 33 LG-4 (55EB)	127.50 127.50	36 AP-3 (252D) 36 AP-4 (252D) 36 AP-5 (252D)	15.95 15.95 15.95
32 M-76 32 M-77	5.70 6.98	33 LG-20 (G400) 33 LG-22 (40E)	139.95 129.95	36 AP-5 (252D) 36 AP-6 (252D) 36 AP-7 (252D)	15.95 15.95
32 M-79 32 M-80	5.76 5.18	33 LG-23 (40EB) 33 LG-30 (75G) 33 LG-31 (75GB1)	129.95 227.50 227.50	36 AP-8 (252D) 36 AP-10	15.95
32 M-81 32 M-99 (W-577) 32 M-100 (W-576)	6.48 1.40 1.40	33 LG-32 (75TA) 33 LG-33 (75EB)	171.50 171.50	36 AP-11 36 AP-12	.30 .85
32 M-100 (W-576) 32 M-101 (W-629) 32 M-102 (W-690)	1.50 2.95	33 M-82 33 M-83	177.65 2.25	36 AP-13 36 AP-14	1.90 2.05
32 M-103 (XCK-10) 32 M-104 (XCK-18)	2.00 2.50	33 M-84 33 M-86	2.50 198.50	36 AP-15 36 AP-16 36 AP-17	.05 1.00 .05
32 MH-1018 32 MH-1024	10.68 11.70	33 S-1 (78-A) 33 S-2 (81-EB)	193.10 213.95	36 AP-18 36 AP-19	2.65
32 MH-1031 32 MH-1042	12.82 17.22	33 S-3 (81-F) 33 S-4 (102-E)	244.70 241.30 183.25	36 AP-20 36 AP-30 (356-11)	43.10
32 MH-1818 32 MH-1824 32 MH-1831	12.92 14.06 15.56	33 S-6 (56-A) 33 S-7 (Q-42-B) 33 S-9	188.00 1.95	36 AP-31 (356-12) 36 AP-40 (K252EA)	44.10 28.20
32 MH-1831 32 MH-1842 32 MHG-1018	19.94 1.32	34 DT-1 (525) 34 DT-2 (115926)	97.45 34.95	36 AP-41 (K252EA) 36 AP-42 (88F-6)	28.20 13.40
32 MHG-1024 32 MHG-1031	1.38 1.50	34 DT-3 (530) 34 DT-4 (540)	152.95 166.45	36 AP-43 (49364) 36 AP-44 (49364P)	5.30 5.30
32 MHG-1042 32 MHG-1818	1.94 1.84	34 DT-5 (525-PA) 34 DT-7 (551-SP)	119.95 167.95	36 AP-45 (252EA) 36 AP-46	9.50 1.65 9.45
32 MHG-1824 32 MHG-1831	1.90 1.98	34 DT-8 (551-SPEM) 34 DT-10	198.95 2.95	36 AP-47 36 AP-48 36 AP-49	3.70
32 MHG-1842 32 MJ-1818	2.14 16.98 17.92	34 DT-11 34 DT-12 34 DT-13	5.65 2.20 7.30	36 AP-55 (22A) 36 AP-65 (119A)	19.45 10.70
32 MJ-1824 32 MJ-1831 32 MJ-1842	19.78 23.56	34 DT-14 34 DT-20 (105634)	3.00 16.70	36 AP-70 (2400) 37 CS-3	16.55 1.64
32 MJ-2118 32 MJ-2124	17.48 19.32	34 DT-21 (105707) 34 DT-22 (105600)	17.60 13.95	OR COTT	70
32 MJ-2131 32 MJ-2142	21.38 25.56	34 DT-23 34 DT-24	1.45 1.15	37 CT-1	.76
32 MJ-2418 32 MJ-2424 32 MJ-2431	18.88 21.12 23.28	34 DT-25 34 DT-26 34 DT-27	1.15 .85 5.95	37 CT-2	.75
32 MJ-2431 32 MJ-2442 32 MJ-3118	27.96 21.58	34 DT-28 34 DT-29	2.15 .75		
32 MJ-3124 32 MJ-3131	24.54 27.64	34 DT-60 (900264) 34 DT-61 (105677)	20.75 18.10	37 DT-10 37 DT-11	2.95 5.65
32 MJ-3142 32 MJ-4218	32.24 26.30	34 DT-62 (105670) 34 DT-65	21.90 24.50	37 DT-11 37 DT-17, 3 oz. can	.49
32 MJ-4224 32 MJ-4231 32 MJ-4242	29.78 33.48 39.24	34 DT-80 34 DT-81 35 BH-2	6.50 6.50 7.50	37 DT-18, 8 oz. can	1.29
32 MJG-1818 32 MJG-1824	1.82 1.98	35 BH-3 35 BH-4	16.00 18.00	37 E-15	20.30
32 MJG-1831 32 MJG-1842	2.10 2.32	35 CO-1 (610-A) 35 CO-2 (4001)	104.89 104.89	37 F-80	2.75 3.25
32 MJG-2118 32 MJG-2124	1.88 2.04	35 CO-3 (700) 35 CO-5 (701)	149.95 159.95 259.95	37 RE-1 37 RE-5	1.75
32 MJG-2131 32 MJG-2142 32 MJG-2418	2.14 2.36 1.98	35 CO-6 (710) 35 CO-25 (867-2011) 35 CO-26 (610A-2261	14.40	A THE STATE OF THE	
32 MJG-2424 32 MJG-2431	2.14 2.24	35 CO-27 (701-2261) 35 CO-28 (710-1751)	16.20 29.70	37 RE-10	1.60
32 MJG-2442 32 MJG-3118	2.44	35 CO-36 (492-2121) 35 CO-37 (491-2051)	.48		
32 MJG-3124 32 MJG-3131	2.24 2.32 2.52	35 CO-38 (700A-2391 35 CO-39 (492-210)	) 1.68 .30 1.08	37 TD-20, 42"	10.95
32 MJG-3142 32 MJG-4218 32 MJG-4224	2.32 2.44	35 CO-40 (492-3021) 35 CO-41 (492-3041) 35 CO-42 (492A-3221	.66	37 TD-21, 54"	11.95
32 MJG-4231 32 MJG-4242	2.52 2.76	35 CO-43 (299-8941) 35 CO-44 (700-1481)	2.40 5.94		10.0*
32 MP-2118 32 MP-2124	6.80 7.70	35 CO-45 (299-8951) 35 CO-46 (700-1151)	3.12 4.62	37 TD-22, 72"	13.95
32 MP-2131 32 MP-2142 32 MP-3118	8.62 10.48 8.24	35 CO-47 (700-5121) 35 CO-48 (700B4201		37 TD-25, 54"	17.75
32 MP-3124 32 MP-3131	9.34 10.46	35 CO-50 (610-1341) 35 DT-15 (1A-25)	4.76	37 TD-26, 72"	18.75
32 MP-3142 32 MP-4242	12.54 14.66	35 DT-16	1.20	To a state of the same	
32 MPG-2118 32 MPG-2124	1.90 1.94	35 E-22 (NAC41-37)	18.50 16.75	37 TD-30, set of 4	2.75
32 MPG-2131 32 MPG-2142	2.04 2.30	35 E-26 (18M8) 35 E-29 (400-696)	18.95		

Page No.	870	CK NO.	LIST	Pag	0	STOCK NO.	LIST		Page No.		STOCK NO.	LIST
37	WF-1		31.50	39	8-51		.15		39	S-77		.78
37	WF-5		47.50									
	WF-10 WF-15		15.75	39	S-52		. 22		39	S-78		. 33
	X-1		27.25									
38 38	CC-100 CC-101		$\frac{15.75}{6.50}$	made of so	0.50		. 23		39	S-79		.51
38	CC-102		21.60	39	S-56		. 20		00	D-10		
	D-1 D-3		119.75 89.95									
38	D-4		2.95	39	S-57		.28		39	S-80		.70
	D-5 D-6		2.25 4.25									
38	D-7 D-8		17.95									
	D-9		.30	39	S-59		.33		39	S-81		. 25
	D-10 D-11		83.50 94.75									
38	D-15		151.50		~ ~~		The Market Wood		00	~ ~~		
	P-209 P-211		91.50 109.25	39	S-60		.17		39	S-82		.38
	P-212		150.00									
39	S-10		. 40	30	S-61		.19		30	S-83		.53
				09	10-01		.19		00	D-00		. 00
M												
39	S-11		. 53	39	S-62		.24		39	S-88		.40
30	S-13		. 45									
00	10-10		. 40	39	S-63		.38		39	S-89		.34
39	S-14		.55	20	CI CA		10					
				99	S-64		.40		39	S-90		.50
39	S-16		.50	39	S-65		.38		30	S-91		.50
									00	13-31		
30	S-18		.55									
00	5-10		.00	39	S-66		.32		39	S-92		. 58
39	S-20		.28	39	S-67		. 44		20	0.00		No. of Salmers
				10-211 83					39	S-93		.73
20	0.01		20									
39	S-21		. 20	39	S-68		. 49		39	S-94		. 55
39	S-30		.70	30	S-69		47					
							.47		39	S-95		1.10
										-		
39	S-31		.72		S-70		.15		39	S-96		. 62
										200		.02
39	S-34		.85									
	1014		republic	99	S-71		. 24		39	S-97		. 50
39	S-35		.90	39	S-72		.38		30	S-98		1 70
												1.70
	S-39		.12	WO-89								
00	5-00		10-10	39	S-73		.39		39	S-101		.40
39	S-40		.17	30	S-74		. 25		20	9 105		20
				20-214 24	- Common				99	S-105	· ANDROY	. 36
20	S-41		. 25	NO DW EA								
99	0-11		. 20	39	S-75		1.38		39	S-110		3.40
39	S-50				S-76							
				2-W	B. D.		.78		98	S-111		.10

Page No.	STOCK NO.	LIST	Page No.	STOCK NO.	LIST	Page No.	STOCK NO.	LIST
	S-112	.12		R-81 (3103CO)	4.95	42	SD-5 (2-3F)	1.95
			41	R-82 (3165F)	.88	42	SD-6 (212-3F)	1.95
39	S-120	1.00	41	R-83 (3103C4)	5.75	42	SD-7 (3-3F)	1.95
			41	8-45	3.95	42	SD-10 (2-3ME)	2.85
39	S-121	. 55	41	S-46	2.95	42	SD-11 (212-3ME)	2.85
			41	8-47	1.75	42	SD-12 (3-3ME)	2.85
39	S-122	.50		S-99	.80	42	SD-15 (2-3FE)	2.95
			41	T-1, foot T-7, 50 ft. roll	9.00	42	SD-16 (212-3FE)	2.95
39	S-125	.60	41	T-2, foot	. 29	42	SD-17 (3-3FE)	2.95
			41	T-8, 60 ft. roll	9.80	42	TD-31, length	8.95
39	S-130	.14	41	T-3, foot T-9, 50 ft. roll	.40 15.00	42	TD-33	1.75
			41	T-55	3.75	42	TD-34	1.60
39	S-135	.15	41	1-00	0.10	42	TD-36	1.25
			41	T-56	4.50	42	TD-43	1.90
39	S-136	.22	41	TD-1	3.95	43	MB-1	43.00
			41	TD-2	4.75	43 43	MB-2 MB-3	21.50 18.25
40	F-50 (Y 200-1)	2.85	41	TD-3	.20	43 43	MB-4 MB-10	5.25
40	F-51 (Y200-5)	3.50	41	TD-4	.30	43 43	MB-11 MB-12	$\frac{1.50}{1.50}$
40	F-52 (Y200-8)	6.25	42	AT-50, 50 ft. roll	20.00	43 43	MC-5 MC-6	4.95
40	F-53 (924-10)	10.50	42 42	AT-51, foot AT-55, 50 ft. roll	30.00	43 43	MC-7 MC-8	1.95 10.00
40	F-54 (1882)	4.75	42 42	AT-56, foot BC-1	. 55 . 35	43 43	MC-9 N-50	2.95 1.50
40	F-55 (965-A)	15.00	42	BC-2	.40	43 43	S-25 WC-40	24.50 .40
40	F-56 (Y300-1)	.89	42	BC-3	.45	43	WC-60 (1494)	60.00
40	F-57 (K880)	.95	42	M-310	1.50	43 43	WC-61 (1497) WC-63 (14)	6.00
40	F-58 (M318)	.75	42	M-311	1.50	43 43	WC-64 (25) WC-66 (20)	$12.00 \\ 16.50$
40	F-62 (Y200-4	9.25	42	M-312	1.50	43 43	WC-67 (8) WC-68 (7)	1.75
	F-65 (Y200-3)	6.50	42	M-313	2.75	43	WC-69 (13) WC-70 (16), set of 4	$\frac{2.75}{1.25}$
	F-66 (P-102)	. 24	42	M-314	1.50	43 43	WC-70 (16), set of 4 WC-71 (18) WC-72 (19), set of 4	.85
40	R-77 (1421R)	4.50	42	M-315	2.75	43	WC-73 (15) WC-74 (22)	1.00
40	R-80 (970U)	.85	42	M-316	1.50	43	WC-75 (23) WC-76 (24)	8.50 8.80
40		1.38	42	M-317	2.75	43	WC-76 (24) WC-77 (1) WC-78 (10)	25.00
40	4000 (01000)	1.33	42	M-318	1.50	43 43		2.00
40	01 (2002)	5.95	42	M-319	2.75	43	WC-82 (5)	1.20
40	00 (2002122)	5.25	42	M-320	2.25	43	WC-84 (21)	1.00 4.50 1.25
41	CC-1	19.50	42	M-321	2.25	43 43	WC-86	.20
	TOP	TH CHOOD I	42	M-325	6.95	43 43	WC-88	.40
	FOB .	FACTORY	42	M-326	.45	43 43	WC-90 (12)	.60
41	CC-2	18.00		M-330	7.95	43 43 43	WC-92	.70
			42	M-990	1.00	43	WC-94	2.50
	FOB	FACTORY	42	M-331	.50	43	WC-98	3.75 6.50
4	1 CC-3 (A)	sets 47.50	42	MTS-1	6.95	44	CJ-1 (30353)	53.60 27.44
	1 CC-4 (B)	sets sets 46.50	19	SD-1 (2-3M)	1.95	44	CJ-3 (30372)	6.90 26.00
	11 CC-7 (C)	sets sets 46.25		SD-2 (212-3M)	1.95	44	CJ-5 (30341)	9.70 4.20
	11 CC-8 (D)	sets sets 45.50		SD-2 (212 611)	1.95	44	4 CJ-9 (30346-2) 4 CJ-20 (30330)	4.20
		sets				44	4 CJ-21 (30502)	2.00

Page No.	STOCK NO.	LIST	Page		LIST	Page No.	STOCK NO.	LIST
44 (	CJ-22 (30501)	1.60	45	30672	.68		P-14	4.95
44 (		1.11	45 45	30677 30678	1.44 4.50	47	P-16	4.95
44 (	CJ-26 (30439) CJ-27 (30440)	.04	45 45		76.00 83.60	47	P-17	
44 (	CJ-28 (30333)	OF	45	C-5 (30658)	4.00			4.95
44 (	CJ-29 (30334) CJ-30 (30332) CJ-31 (30441)	.06	45 45	C-9 (30619)	4.00 16.80	47	P-19	4.25
44 (	CJ-32 (30335) CJ-33 (30340)	.04	45 45	CM-10 (30576)	13.90 3.79	47	P-20	2.05
44 (	GJ-34 (30442)	1.06	46	CE-3	20.35	47	PGL-2 (123)	50.50
44 (	CJ-35 (30443) CJ-36 (30444)	. 28	46	CE-4	23.10	47	PGL-3 (126)	51.50
44 (	CJ-37 (30445) CJ-38 (30446)	.28	46	CE-5	23.10	47	PGL-4 (136)	51.50
44 (	CJ-39 (30447)	.56	46	CE-6	23.10	47	PGL-5 (210)	60.55
44 (	CJ-40 (30448) CJ-41 (30449)	.22	46	CE-7	23.10	47	PGL-6 (212)	63.65
44 (	CJ-42 (30450) CJ-43 (30451)	.05	46	CE-8	13.50	47	PGL-7 (320)	79.50
44 (	CJ-44 (30470) CJ-45 (30471)	.06	46	CE-21 CE-22	4.80	47	PGL-9 (312)	66.00
44 (	CJ-46 (30452) CJ-47 (30453)	.28	46 46	CE-31 CE-32	2.50 2.70	47		
44 (	CJ-48 (30454) CJ-49 (30455)	.90	46 46	CE-36 CE-37	1.30		PGL-10 (412)	82.00
44 (	CJ-50 (30456) CJ-51 (30457)	.22	46	CE-38	1.40 3.50	47	SP-1 SP-2	34.00 46.00
44 (	CJ-52 (30458)	1.06	46	CE-39 CE-40	3.25 23.50	47	SP-3 SP-4	54.00 54.00
44 (	CJ-53 (30459) CJ-54 (30460)	1.14	46	CE-41 CR-1	20.75 9.95	47	SP-5 SP-6	5.75 7.75
44 (	CJ-55 (30461) CJ-56 (30462)	1.70 1.70	46	CR-2	9.95	47	SP-7	5.75
44 (	CJ-57 (30463) CJ-58 (30464)	.36 2.66	46	CR-3	2.25	47	SP-17 SP-20	58.00 62.00
44 (	CJ-59 (30465) CJ-60 (30466)	.64	46	H-140		47	SP-21 SP-40	<b>62.00</b> 2.90
44 (	CJ-61 (30467)	.12	46	H-141	4.50 2.25	47	SP-41 WH-111	.35
44 (	CJ-62 (30468) CJ-63 (30469)	.56		L-22	11.95	48 48	WH-111 B19 (C-05), length B-21 (S40-B)	.30 .50
44 (		45.00		L-28	61.95	48 48	WH-111 B19 (C-05), length B-21 (S40-B) B-25 (444) B-75 (S-41) B-76 (S-41-M)	15.68
44 (	CS-12	33.00 8.70	46	M-200	7.86	48	B-76 (S-41-M)	3.90
	CS-13		46	M-201	2.00	48	B-77 (S-42) B-78 (S-42-M)	18.66 6.50
45 3	0165		46	M-202	25.25	48 48	B-79 (S-42-C) B-80 (S-83)	2.20 3.60
45 3	0181	.11		M-203	6.00	48 48	B-81 (S-80) B-82 (S-80-2)	4.22
45 3	0183 0185	.10		M-204 M-205	6.50 38.20	48	B-83 (S-80-3) B-84 (S-80-1)	1.68
45 3 45 3	0192 0193	. 13 . 04	46	T-76	17.75	48	B-100 (SA-95)	.56
	0195 0200		46 46	T-77 T-78	18.25 19.00	48	B-101 (SA-95-1) B-102 (S-80-7)	.44
45 3	0201 0202	.05	47	BN-10	4.25	48	B-103 (S-80-4) BP-10 (S-10)	.05 9.40
45 3	0208 0210	.04	47	BN-11 BN-15	4.25 4.25	48	BP-12 (S-11) BP-13 (S-11-M)	13.40 4.10
45 3	0213A	2.40	47	BT-1 BT-10	5.00 4.50	48	BP-14 (S-12) BP-15 (S-12-M)	23.90 6.84
45 3	0217 0251	.41	47	BT-12 BT-14	4.50 4.50	48	BP-16 (S-12-C) BP-85 (S-80-5)	2.20
	0255 0263	2.30	47	BT-18	6.75 52.95	48	BP-86 (S-80-6)	.72
	0267 0270	10.30	47	DT-51 MN-10	9.50 4.50	48	BP-87 (S-80-7) BP-88 (S-80-8)	.20
45 3	0276 0277	8.20	47	MN-12	6.25	48 48	BP-89 (S-80-4) CA-1	.05 4.95
45 3	0280	.06		MN-15 P-2 (123)	3.95 45.50		M-300	4.95
45 3	0282 0285	3.80 2.00	47	P-3 (126)	46.50			
45 3	0301 0308	. 05 18 . 80					B-22 (S-73)	2.04
45 3	0311	.04				49	B-23 B-24 (470)	1.44
45 3	0439 0572	. 10			55.55	49	B-28 (313-C) B-29 (S-74)	2.48 2.04
45 3	0573	. 24			58.65	49	B-104 (473) B-106 (475)	2.66 2.66
45 3	0574 0579	1.20			74.50	49	B-108 (478) B-118 (468)	1.06
45 3	0583 0628A	. 25			61.00	49	B-119 (469)	.80
	0630 0634	10	47	P-10 (412)	77.00	49	CE-85 CE-91 (S-845)	1. <b>75</b> .28
45 3	0665 0666	0.4	17	P-11	4.25	49	L-25	22.50
45 3	0667 0671	0 50	17	P-12	4.95	49	M-206	17.88
10 0	00.1	. 24						

Page No.	STOCK NO.	LIST	Pag	0		Pag	0	
	M-207	18.98	51	E-70	1.00	No	EZ-C24	<b>LIST</b> 4.85
49	M-208	12.05	51		.75	32	EZ-C24	4.00
49	M-209	12.93	51	E-80	.45	52	H-100	1.95
49	M-210	15.68	51	E-81	.46	52	H-101	.80
49	M-211	11.28	51 51	E-82 E-83, quart	1.00	52 52	L-10 LT-3 (LHT-3K)	2.95 2.45
49	M-212	9.35	51 51	E-84, gallon E-85, 5 gallon	3.85 18.25		HI ( (HILL 012)	- 4
49	M-213	3.95	51 51		. 65 1.15	52	LT-6 (LHT-6K)	2.85
49	M-214	4.17	51 51	I-3, quart I-4, gallon	2.05 7.00	52	LT-12 (LHT-12K)	3.85
49	M-220	1.75	51 51	I-36, pint I-37, quart I-38, gal.	$\begin{array}{c} .69 \\ 1.25 \\ 4.10 \end{array}$	35 116		
	M-221 M-222	3.50		K-3, ½ pt. K-4, pint	1.25 1.90	52	LT-20 (LHT-20K)	5.25
	W-273	. 20	51 51	K-5, quart K-6, gal.	3.10 9.95	52	LT-30 (LHT-30K)	7.25
49	WL-25	9.50	51	K-8 SW-1	1.85 2.55	52	LT-40 (WI-20)	.25
50	E-90, quart E-91, gallon	1.79 5.95	52	EZ-3	2.25	02	11-10 (W1-20)	
50	E-92, 2 gal. E-93, 3 gal.	10.95 16.50 24.95	52	EZ-6	2.95	52	LT-41 (GWI-25)	1.00
	E-95, 5 gal. E-100, tube E-101	1.00 2.50				52	LT-46 (TSA-1035)	6.95
50	E-103, ½ pt. E-104, pint	1.00 1.65	52	EZ-12	3.95			
50	E-105, quart E-106, gallon	2.50 8.25	52	EZ-18	4.95	52	NF-1 (A-6)	1.00
50	E-107 E-109	1.50 1.75				52	NF-2 (B-12)	1.80
	E-110, 2 oz. tube	.60	52	EZ-24	5.75	**	NE 9 (M 96)	0.00
50	E-111, 1 lb. tube E-112, pint	1.95 2.40	52	EZ-30 (EZ-T)	5.95	52	NF-3 (M-26)	2.80
	E-113, quart E-114, gallon	3.15 9.40		4		52	NF-4 (P-40)	2.80
50 50 50	E-120, pint E-121, quart	.85 1.25 3.75	52	EZ-31 (EZ-P)	.98	52	NF-5 (J-56)	3.00
50 50	E-122, gallon E-123, 5 gal. E-130, 150 ft. roll	17.50 9.75	52	EZ-32 (EZ-G)	.89		112 0 (0 00)	0.00
50 50	E-131, foot E-132, 150 ft. roll	.20 17.50				52	NF-6 (S-112)	6.00
50 50	E-133, foot E-140	.30 1.79	52	EZ-A3	4.75	52	NF-7 (L-220)	12.00
50	RL-1, 1 gal. RL-2, 2 gal.	4.75 9.50	52	EZ-A6	5.45	*0	NE 10	2.00
50 50	RL-3, 3 gal. RL-5, 5 gal.	14.25 23.75	52	EZ-A12	6.45	52	NF-10	6.00
50	RL-55, 55 gal. BA-50, gal.	2.80 1.25	02	Danie	01-718 11-218	52	NF-14	1.00
51	BA-51, qt. E-50, 5 oz.	.90	52	EZ-A18	7.45	52	NF-21 (T-3)	2.35
51	E-51, 5 oz.	1.20	52	EZ-A24	8.25			
51	E-52, 5 oz.	1.20		77. 70	0.05	52	NF-22 (T-6)	2.65
51	E-53, pt.	2.50	52	EZ-B3	2.25	52	NF-23 (T-9)	2.95
	E-54, pt.	2.50	52	EZ-B6	2.85	50	NE 94 (T. 12)	2.45
	E-55, pt.	1.95	59	EZ-B12	3.85	52	NF-24 (T-13)	3.45
	E-57, qt.	3.25				52	NF-25 (T-18)	3.95
	E-61, qt. E-62, qt.	4.50	52	EZ-B18	4.80	52	P-20	2.05
	E-63, ½ gal.	5.50	52	EZ-B24	5.65	52		.30
	E-64, ½ gal.	7.50	5-02	D# C0	1.48	53 53	C-75 C-76	289.95 339.95
	E-65, ½ gal.	7.50	52	EZ-C3	1.45	53 53	DT-58 (100-8)	399.95 439.95
51		9.25	52	e EZ-C6	2.15	53 53	K-25	489.95 46.65
51	E-68, gal.	12.50	52	2 EZ-C12	3.25	53 53		5.95 6.50
51	E-69, gal.	12.50	52	En-OIZ	0.20	53	LB-2 (1743)	9.00
			55	2 EZ-C18	3.95	53	LB-3 (1762)	7.50